

DURA
LAMP

PANELS AND
ACCESSORIES



LUMINOUS FITTINGS



Luminous Fittings

LED panels



10 **BASIC**
SLIMFLUX SL +
UGR - BASIC




12 **PRO**
SLIMFLUX SL UGR
- PRO



14 **BASIC**
SLIMFLUX BL +
UGR - BASIC



16
SLIMFLUX BL +
UGR - PRO



18 **PRO**
SLIMFLUX BL UGR
CCT - PRO



20 **PRO**
SLIMFLUX BL IP65
- PRO



22 **PRO**
SLIMFLUX BL
SENSOR



24 **PLUS**
SLIMFLUX BL
PLAFO + UGR -
PLUS



26 **PLUS**
SLIMFLUX ROUND
- PLUS



28 **PLUS**
SLIMFLUX
TRANSLUCENT
UP&DOWN - PLUS

Accessories



32
PANEL
ACCESSORIES



35
ACCESSORIES -
VARIOUS

Led PANELS


Sidelight

BASIC SLIMFLUX SL + UGR

PRO SLIMFLUX SL + UGR

The classic side-illuminated panels, very low thickness and UGR <19 unavoidable in terminal workplace installations.

In BASIC 25,000h or PRO 50,000h version without driver included.

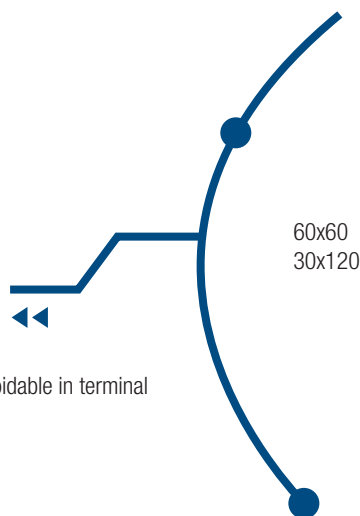


Backlight

BASIC SLIMFLUX BL + UGR

PRO SLIMFLUX BL + UGR


Backlit panels, Backlight: the illumination is direct, and the panel has a back shell several cm thick, acts as a heat sink and must be considered in the recessed space. Wide range in UGR, UGR without driver and standard non-UGR versions.

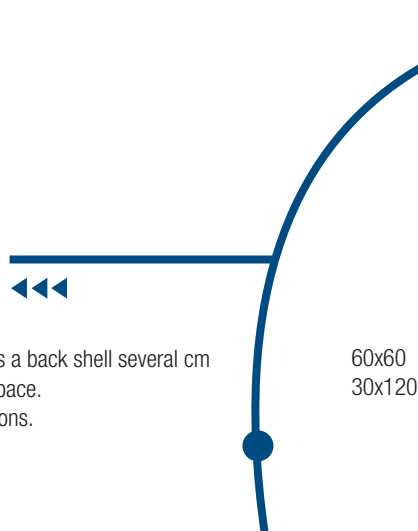

Stock Optimisation

PRO SLIMFLUX BL UGR CCT

Top of the range panels for the most versatile version there is: colour temperature selector to reduce stock. Models with different wattages and Ra80 and Ra90 versions.

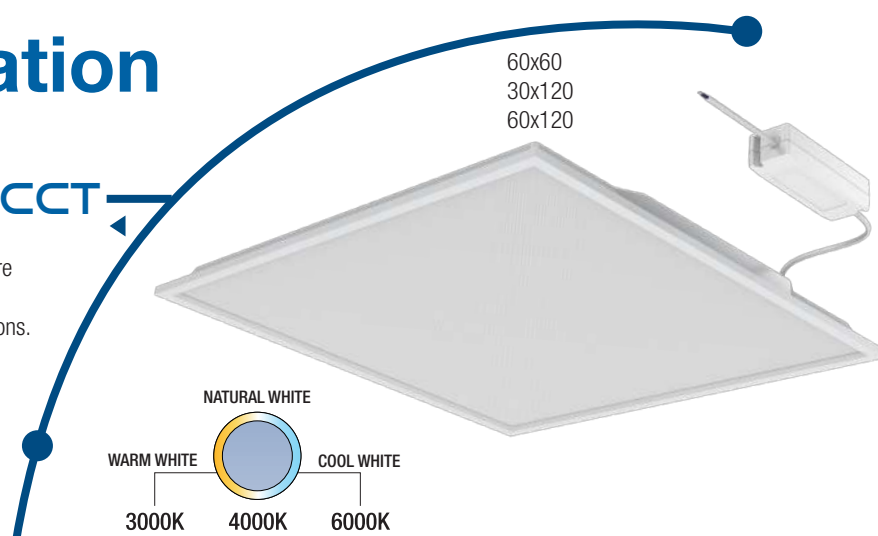

Tecnology & Quality

Specialist

PRO SLIMFLUX BL IP65

High IP for this panel dedicated to outdoor or high humidity areas.

PRO SLIMFLUX BL SENSOR

Motion sensor, also manageable with a remote control.

PLUS SLIMFLUX BL PLAFO + UGR

For mounting on ceilings that do not allow recessed installation, the 4 cm integrated frame panel solves the problem and conceals the driver.



Led Panels

PLUS SLIMFLUX ROUND

PLUS SLIMFLUX TRANSLUCENT UP&DOWN

Decorative panels: the Tondo for surface mounting offers an excellent visual impact, modern and effective, with the same output as a standard square panel. Both round and rectangular pendant panels, with their transparency, enhance the ambience by creating an incomparable effect of lightness.




Visit the site **duralamp.com**
to stay updated on all the news
and on the evolution of our products!



Led PANELS


SIDELIGHT PANELS:

EXTREMELY THIN - LIGHT IS DIFFUSED FROM THE SIDE OF THE FRAME TO THE PANEL

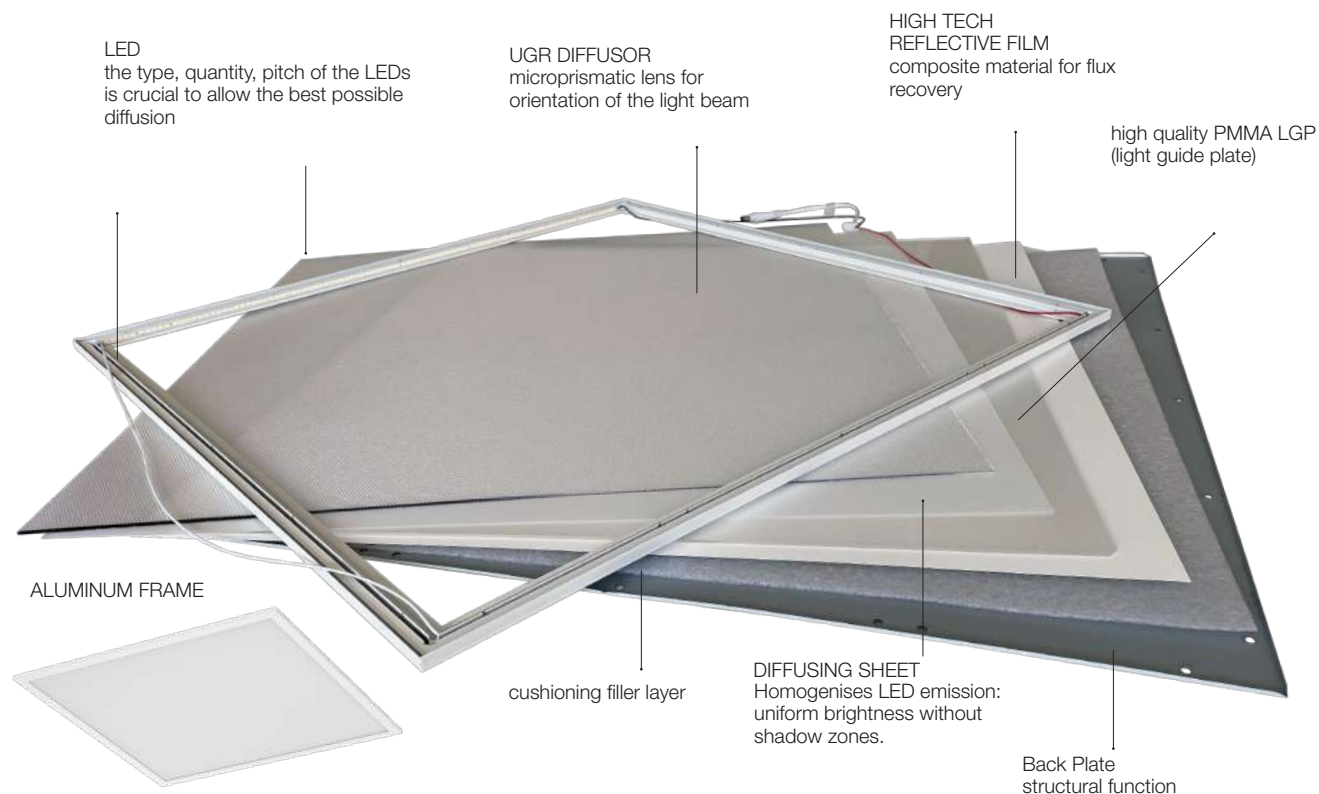

BACKLIGHT PANELS:

DIRECT LIGHT - BEST EFFICIENCY

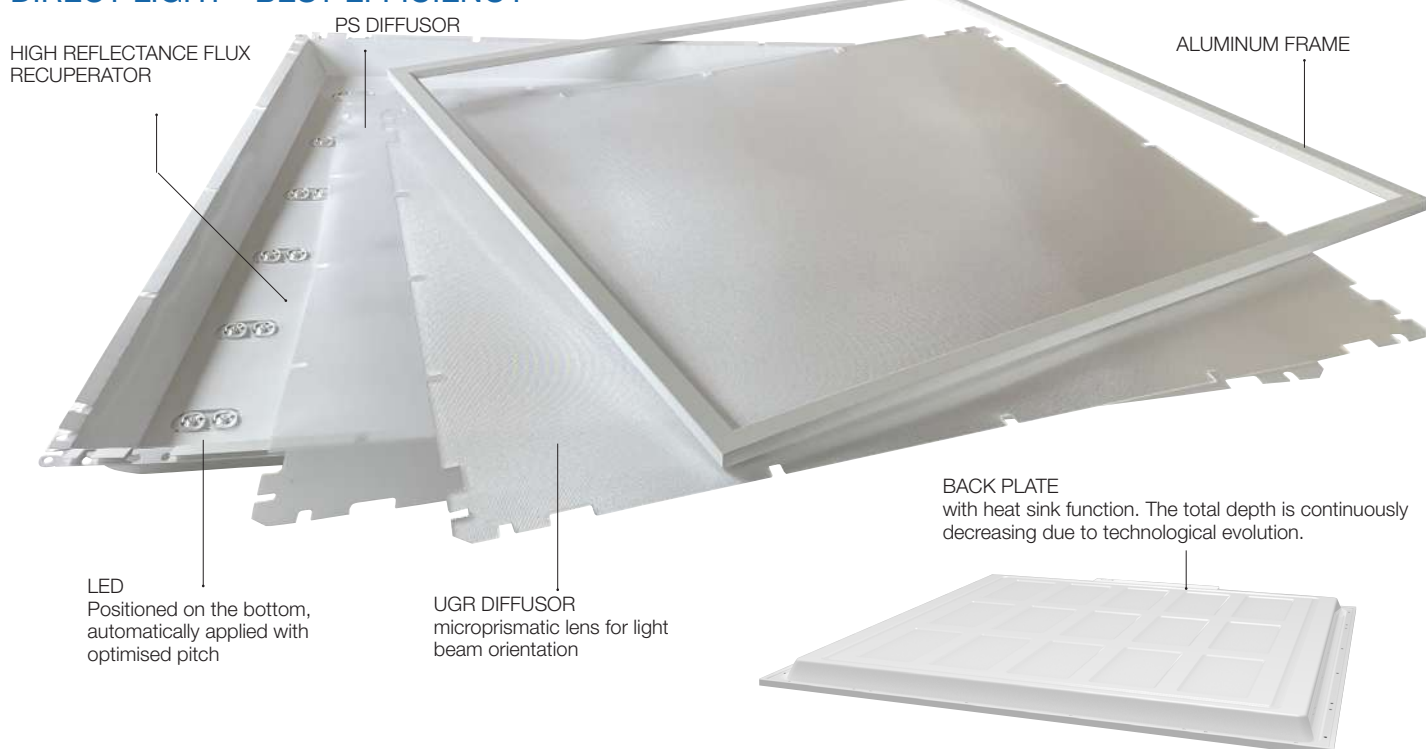

Tecnology & Quality

SIDELIGHT PANELS


SL: SIDELIGHT

Side Light technology is widely used in the production of LED panels. The light emission comes from the profiles embedded in the frame and is reflected uniformly on the surface of the front screen. The advantage is a very light panel with a thickness of just a few millimetres.

SLIMFLUX SL



SLIMFLUX BL



BACKLIGHT PANELS

BL: DIRECT LIGHTING

The positioning of the LEDs on a horizontal plate parallel to the screen guarantees uniformity of illumination and excellent efficiency. The rear compartment, a few centimetres thick, is functional to housing the backlighting and optimising heat dissipation.



Led Panels

LOOKING FOR A LED PANEL?

BASIC

25000H
G2

PLUS

35000H
G3

PRO

50000H
G4H24

60X120

62X62

60X60

30X120



DOWNLOAD PHOTOMETRIES
WWW.DURALAMP.COM

REAL LUMENS

Luminous Flux Data is REAL. Values are measured on actual use conditions.
Nominal values of the LED source are not stated.



Led Panels

	art.	W	BL/SL	lm	Kelvin	UGR	Ra	IP
BASIC	LP6060B3-840	30	BL	3600	4000K		80	IP20
BASIC	LP6060B3-830ST	40	BL	3600	3000K		80	IP20
BASIC	LP6060B3-840ST	40	BL	4000	4000K		80	IP20
BASIC	LP6060B3-860ST	40	BL	4000	6000K		80	IP20
BASIC	LP6060B3UGR-840ST	40	BL	4000	4000K	•	80	IP20
BASIC	LP6060S3-840	30	SL	3600	4000K		80	IP20
BASIC	LP6060S3UGR-840	30	SL	3600	4000K	•	80	IP20
PLUS	LP6060P1-840 <input type="checkbox"/>	40	BL	4000	4000K		80	IP20
PLUS	LP6060P2-840 <input type="checkbox"/>	60	BL	6000	4000K		80	IP20
PLUS	LP6060P2-860 <input type="checkbox"/>	60	BL	6000	6000K		80	IP20
PLUS	LP6060P1UGR-840 <input type="checkbox"/>	40	BL	4000	4000K	•	80	IP20
New PRO	LP6060B1UGRS-940 ***	36	BL	4000	4000K	•	90	IP20
PRO	LP6060UGR-840C ^(x)	28	SL	3730	4000K	•	80	IP20
PRO	LP6060B1-840	40	BL	4000	4000K		80	IP20
PRO	LP6060B1UGR-840HP	45	BL	5500	4000K	•	80	IP20
PRO	LP6060B1UGR-840	28	BL	4000	4000K	•	80	IP20
PRO	LP6060B1UGR-840Z1 ^(x)	28	BL	4000	4000K	•	80	IP20
PRO	LP6060B1UGR-930	40	BL	3000	4000K	•	90	IP20
PRO	LP6060B1UGR-940	30	BL	4000	4000K	•	90	IP20
PRO	LP6060B1UGR-8CCT	40	BL	4500*	3/4/6000K	•	80	IP20
PRO	LP6060B2UGR-8CCT	47	BL	5500*	3/4/6000K	•	80	IP20
PRO	LP6060B1UGR-9CCT	40	BL	4000*	3/4/6000K	•	90	IP20
PRO	LP6060B1NEX	40	BL	4000	4000K		80	IP65
PRO	LP6262UGR-840	33	SL	4350	4000K	•	80	IP20
BASIC	LP30120S3-840	30	SL	3600	4000K		80	IP20
BASIC	LP30120B3UGR-840ST	40	BL	4000	4000K	•	80	IP20
PLUS	LP30120P1-840 <input type="checkbox"/>	40	BL	4000	4000K		80	IP20
PRO	LP30120UGR-840C ^(x)	28	SL	3730	4000K	•	80	IP20
PRO	LP30120B1UGR-840	28	BL	4000	4000K	•	80	IP20
PRO	LP30120B1UGR-9CCT	40	BL	4000*	3/4/6000K	•	90	IP20
PLUS	LP60120P1-840 <input type="checkbox"/>	60	BL	6000	4000		80	IP20
PRO	LP60120B1UGR-9CCT	50	BL	5200*	3/4/6000K	•	90	IP20

60X60

62X62

30X120

60X120

* Lumen and power data are referred to 4000K colour temperature.

*** With sensor

(x) Without driver


☐ Version with integrated frame for surface mounting.

LED panels

SLIMFLUX SL + UGR - BASIC

**FLICKER
FREE** 

Providing greater visual comfort,
improved definition of detail and
reduction of stress.

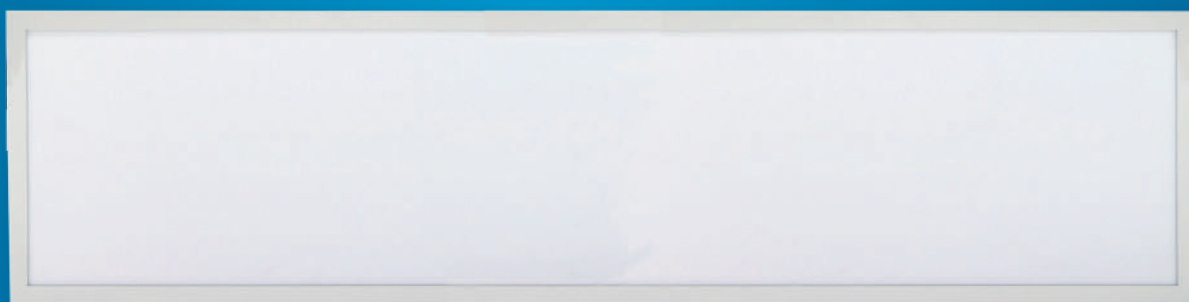

**MONOBLOCK SURFACE
MOUNTING FRAMES**
THICKNESS 6 CM



SURFACE MOUNTING FRAMES
KIT TO BE ASSEMBLED
THICKNESS 5CM - 7CM - 8CM



**RECESSED
MOUNTING FRAMES**
KIT TO BE ASSEMBLED



**FRAME FOR RECESS
POSITIONING OF PANELS**



**ANTI-FALL SAFETY WIRE AND
TERMINAL BLOCK**



**ADJUSTABLE
SUSPENSION KIT**



**METAL SPRINGS KIT FOR
RECESSED INSTALLATION
(NO BACKLIGHT)**



**ON/OFF, MULTICURRENT
DIMMABLE DALI AND
1-10V DRIVERS, STANDBY
EMERGENCY**

LED panels

SLIMFLUX SL + UGR - BASIC

TPOLOGY

Ultra-flat LED fixtures with lateral lighting.

FEATURES

Side heat dissipation.
Immediate switch-on.
Colour rendering: $Ra > 80$.
Remote power supply included.
Do not use with dimmer.
UGR version also available.
Class II fittings.

INSTALLATION

Possibilities include: recessed, suspended, ceiling/wall.
SL (Sidelight) panels can use all frames in our range for surface mounting: see accessories table.

MATERIAL

Painted white aluminium body; anti-yellowing PS screen.

USAGE INFORMATION



SLIMFLUX 60x60 panels can be used with multi-current dimming power supply, code DELT40D-M.

EMERGENCY

SLIMFLUX panels can be used with standby emergency kit, code KTEMRO3.

NOTES

Providing greater visual comfort, improved definition of detail and reduction of stress.

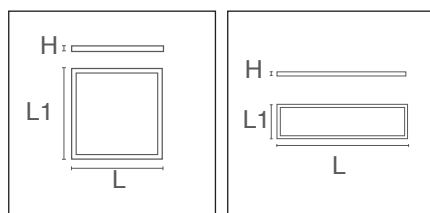

BASIC	220-240 Vac	$Ra > 80$		25000 h L70B20	IP20 VI IP43 VO	-20°C +45°C	Risk Group 0		
--------------	-------------	-----------	--	----------------	-----------------	-------------	--------------	--	--

SLIMFLUX SL - BASIC

W	Im	K	Ra	PF	L	L1	H			ART.
30	3600	4000	> 80	$> 0,9$	595	595	7.8	1970	5 / 5	LP6060S3-840
30	3600	4000	> 80	$> 0,9$	1195	295	7.8	2240	5 / 5	LP30120S3-840

BASIC	220-240 Vac	$Ra > 80$		25000 h L70B20	IP20 VI IP43 VO	-20°C +45°C	Risk Group 0	UGR <19		
--------------	-------------	-----------	--	----------------	-----------------	-------------	--------------	---------	--	--

SLIMFLUX SL UGR - BASIC


W	Im	K	Ra	PF	L	L1	H			ART.
30	3600	4000	> 80	$> 0,9$	595	595	7.8	2200	5 / 5	LP6060S3UGR-840

LED panels

SLIMFLUX SL UGR - PRO

**FLICKER
FREE** 

Providing greater visual comfort,
improved definition of detail and
reduction of stress.

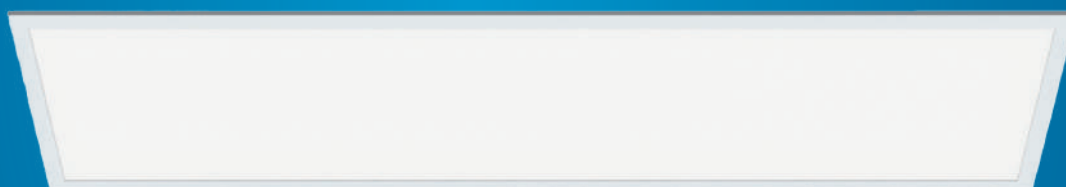

**MONOBLOCK SURFACE
MOUNTING FRAMES**
THICKNESS 6 CM



SURFACE MOUNTING FRAMES
KIT TO BE ASSEMBLED
THICKNESS 5CM - 7CM - 8CM



**RECESSED
MOUNTING FRAMES**
KIT TO BE ASSEMBLED



**FRAME FOR RECESS
POSITIONING OF PANELS**



**ANTI-FALL SAFETY WIRE AND
TERMINAL BLOCK**



**ADJUSTABLE
SUSPENSION KIT**



**METAL SPRINGS KIT FOR
RECESSED INSTALLATION
(NO BACKLIGHT)**



**ON/OFF, MULTICURRENT
DIMMABLE DALI AND
1-10V DRIVERS, STANDBY
EMERGENCY**

LED panels

SLIMFLUX SL UGR - PRO

TPOLOGY

Ultra-flat LED fixtures with lateral lighting.
Driver not included.
Panels quipped with steel anti-fall safety cable (except code LP6262UGR-840).

FEATURES

Side heat dissipation.
Immediate switch-on.
Colour rendering: Ra>80.
Do not use with dimmer.
UGR version.

INSTALLATION

Possibilities include: recessed, suspended, ceiling/wall.
SL (Sidelight) panels can use all frames in our range for surface mounting: see accessories table.

MATERIAL

White painted aluminium body; high transmittance optical PMMA screen.

USAGE INFORMATION

If you want to dim or use the multicurrent power supply dimmer.

EMERGENCY

SLIMFLUX panels can be used with standby emergency kit, code KTEMRO3.

POWER SUPPLY


SLIMFLUX 60x60 panels can be used with multi-current dimming power supply, code DELT40D-M.

PACKAGING

5 pieces pack with single items' box.

NOTES

Panels of this range are supplied WITHOUT driver: please select the required driver from the range.
Providing greater visual comfort, improved definition of detail and reduction of stress.

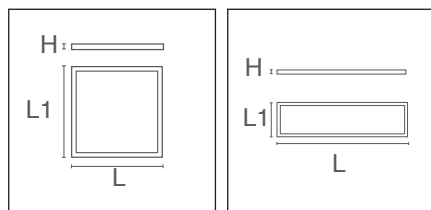

PRO	220-240 Vac	Ra >80		50000 h L80B20	IP20 VI IP43 VO	-20°C +45°C	Risk Group 0	UGR <19		
------------	-------------	--------	--	----------------	-----------------	-------------	--------------	---------	--	--

SLIMFLUX SL UGR - PRO - DRIVER NOT INCLUDED

W	lm	K	Ra	UGR	L	L1	H			ART.
28	3730	4000	>80	<19	595	595	8.5	2240	1 / 5	LP6060UGR-840C ▼
28	3730	4000	>80	<19	1195	295	8.5	2200	1 / 5	LP30120UGR-840C
33	4350	4000	>80	<19	615	615	9	3800	1 / 5	LP6262UGR-840


▼ To be discontinued.

LED panels

SLIMFLUX BL + UGR - BASIC

**FLICKER
FREE** 

Providing greater visual comfort,
improved definition of detail and
reduction of stress.

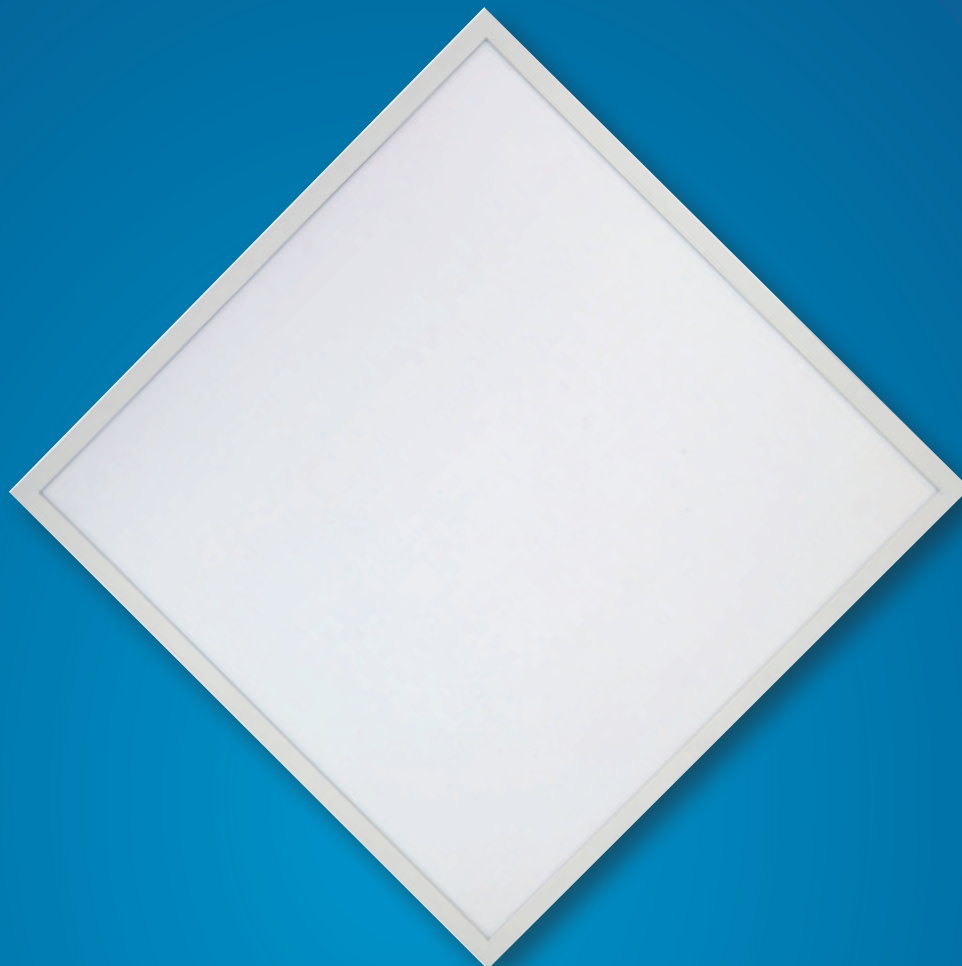

**MONOBLOCK SURFACE
MOUNTING FRAMES**
THICKNESS 6 CM



SURFACE MOUNTING FRAMES
KIT TO BE ASSEMBLED
THICKNESS 5CM - 7CM - 8CM



**RECESSED
MOUNTING FRAMES**
KIT TO BE ASSEMBLED



**FRAME FOR RECESS
POSITIONING OF PANELS**



**ANTI-FALL SAFETY WIRE AND
TERMINAL BLOCK**



**ADJUSTABLE
SUSPENSION KIT**



**METAL SPRINGS KIT FOR
RECESSED INSTALLATION
(NO BACKLIGHT)**



**ON/OFF, MULTICURRENT
DIMMABLE DALI AND
1-10V DRIVERS, STANDBY
EMERGENCY**

LED panels

SLIMFLUX BL + UGR - BASIC

TPOLOGY

Direct lighting LED panel.

FEATURES

The backlit panel is composed of a metal material back compartment providing a heat sink function.

Colour rendering: Ra>80.

Do not use with dimmer.

Panel code LP6060B3-840 is in Insulation Class I : it cannot therefore be made dimmable by changing the driver nor can it be used with the ballast for stand-by lighting.

INSTALLATION

Consider more depth for recessed installations.

Surface mounting: select the recommended frame from the accessories table.

MATERIAL

Painted white aluminium body; high-transmittance PMMA primary optics.

USAGE INFORMATION

Class II SLIMFLUX panels can be used with multi-current dimming power supply, code DELT40D-M.

EMERGENCY


Class II SLIMFLUX panels can be used with standby emergency kit, code KTEMRO3.

PACKAGING

6 pieces package with 2-pcs inner box.

NOTES

Providing greater visual comfort, improved definition of detail and reduction of stress.

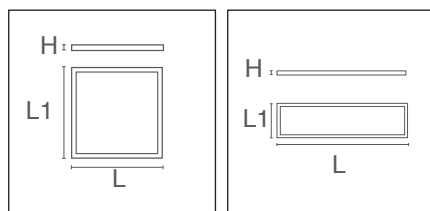

BASIC	220-240 Vac	Ra >80		25000 h L70B20	IP20 VI IP43 VO	-20°C +45°C	Risk Group 0			
--------------	-------------	--------	--	----------------	-----------------	-------------	--------------	--	--	--

SLIMFLUX BL - BASIC

W	lm	K	Ra	PF	L	L1	H			ART.
30	3400	4000	>80	>0,9	595	595	25	1480	8 / 8	LP6060B3-840 *
40	3600	3000	>80	>0,9	595	595	25	1480	6 / 6	LP6060B3-830ST
40	4000	4000	>80	>0,9	595	595	25	1480	6 / 6	LP6060B3-840ST
40	4000	6000	>80	>0,9	595	595	25	1480	6 / 6	LP6060B3-860ST

BASIC	220-240 Vac	Ra >80		25000 h L70B20	IP20 VI IP43 VO	-20°C +45°C	Risk Group 0	UGR <19		
--------------	-------------	--------	--	----------------	-----------------	-------------	--------------	---------	--	--

SLIMFLUX BL UGR - BASIC

W	lm	K	Ra	UGR	PF	L	L1	H			ART.
40	4000	4000	>80	<19	>0,9	595	595	25	1480	6 / 6	LP6060B3UGR-840ST
40	4000	4000	>80	<19	>0,9	295	1195	25	1780	6 / 6	LP30120B3UGR-840ST

LED panels

SLIMFLUX BL + UGR - PRO

**FLICKER
FREE** 

Providing greater visual comfort,
improved definition of detail and
reduction of stress.



**MONOBLOCK SURFACE
MOUNTING FRAMES**
THICKNESS 6 CM



SURFACE MOUNTING FRAMES
KIT TO BE ASSEMBLED
THICKNESS 5CM - 7CM - 8CM



**RECESSED
MOUNTING FRAMES**
KIT TO BE ASSEMBLED



**FRAME FOR RECESS
POSITIONING OF PANELS**



**ANTI-FALL SAFETY WIRE AND
TERMINAL BLOCK**



**ADJUSTABLE
SUSPENSION KIT**



**METAL SPRINGS KIT FOR
RECESSED INSTALLATION
(NO BACKLIGHT)**



**ON/OFF, MULTICURRENT
DIMMABLE DALI AND
1-10V DRIVERS, STANDBY
EMERGENCY**

LED panels

SLIMFLUX BL + UGR - PRO

TPOLOGY

Direct lighting LED panel.

FEATURES

The positioning of the LED sources on a horizontal plate ensures lighting uniformity on the screen surface and excellent efficiency levels.

The backlit panel is composed of a metal material back compartment providing a heat sink function.

Equipped with special PMMA primary lenses, the LED sources positioned on a horizontal plate ensure lighting uniformity on the diffuser surface and ensure excellent efficiency levels.

Colour rendering: Ra>80 or Ra>90.

INSTALLATION

Consider more depth for recessed installations.


Surface mounting: select the recommended frame from the accessories table.

MATERIAL

Painted white aluminium body; high-transmittance PMMA primary optics.

PACKAGING

6 pieces pack with single items' box.

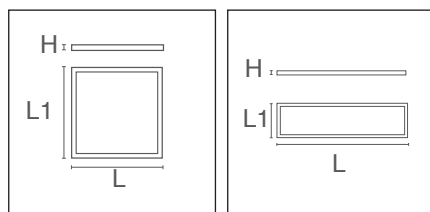

PRO	220-240 Vac	Ra >80		50000 h L80B20	IP20 VI IP43 VO	-25°C +40°C	Risk Group 0		
------------	-------------	--------	--	----------------	-----------------	-------------	--------------	--	--

SLIMFLUX BL - PRO

W	lm	K	Ra	PF	L	L1	H			ART.
40	4000	4000	>80	0,9	595	595	30	2200	1 / 6	LP6060B1-840

PRO	220-240 Vac	Ra >80		50000 h L80B20	IP20 VI IP43 VO	-20°C +45°C	Risk Group 0	UGR <19		
------------	-------------	--------	--	----------------	-----------------	-------------	--------------	---------	--	--

SLIMFLUX BL UGR - PRO

W	lm	K	Ra	UGR	PF	L	L1	H			ART.
28	4000	4000	>80	<19	0,9	595	595	30	2150	1 / 6	LP6060B1UGR-840
40	4000	3000	>90	<19	0,9	595	595	30	2200	1 / 6	LP6060B1UGR-930
30	4000	4000	>90	<19	0,9	595	595	30	2200	1 / 6	LP6060B1UGR-940
45	5500	4000	>80	<19	0,9	595	595	30	2070	1 / 6	LP6060B1UGR-840HP
28	4000	4000	>80	<19	0,9	1195	295	30	1780	1 / 6	LP30120B1UGR-840

PRO	220-240 Vac	Ra >80		50000 h L80B20	IP20 VI IP43 VO	-20°C +45°C	Risk Group 0	UGR <19		
------------	-------------	--------	--	----------------	-----------------	-------------	--------------	---------	--	--

SLIMFLUX BL UGR - PRO - DRIVER NOT INCLUDED


W	lm	K	Ra	UGR	PF	L	L1	H			ART.
28	3600	4000	>80	<19		595	595	35	2150	1 / 6	LP6060B1UGR-840Z1

LED panels

SLIMFLUX BL UGR CCT - PRO

**FLICKER
FREE** 

Providing greater visual comfort,
improved definition of detail and
reduction of stress.

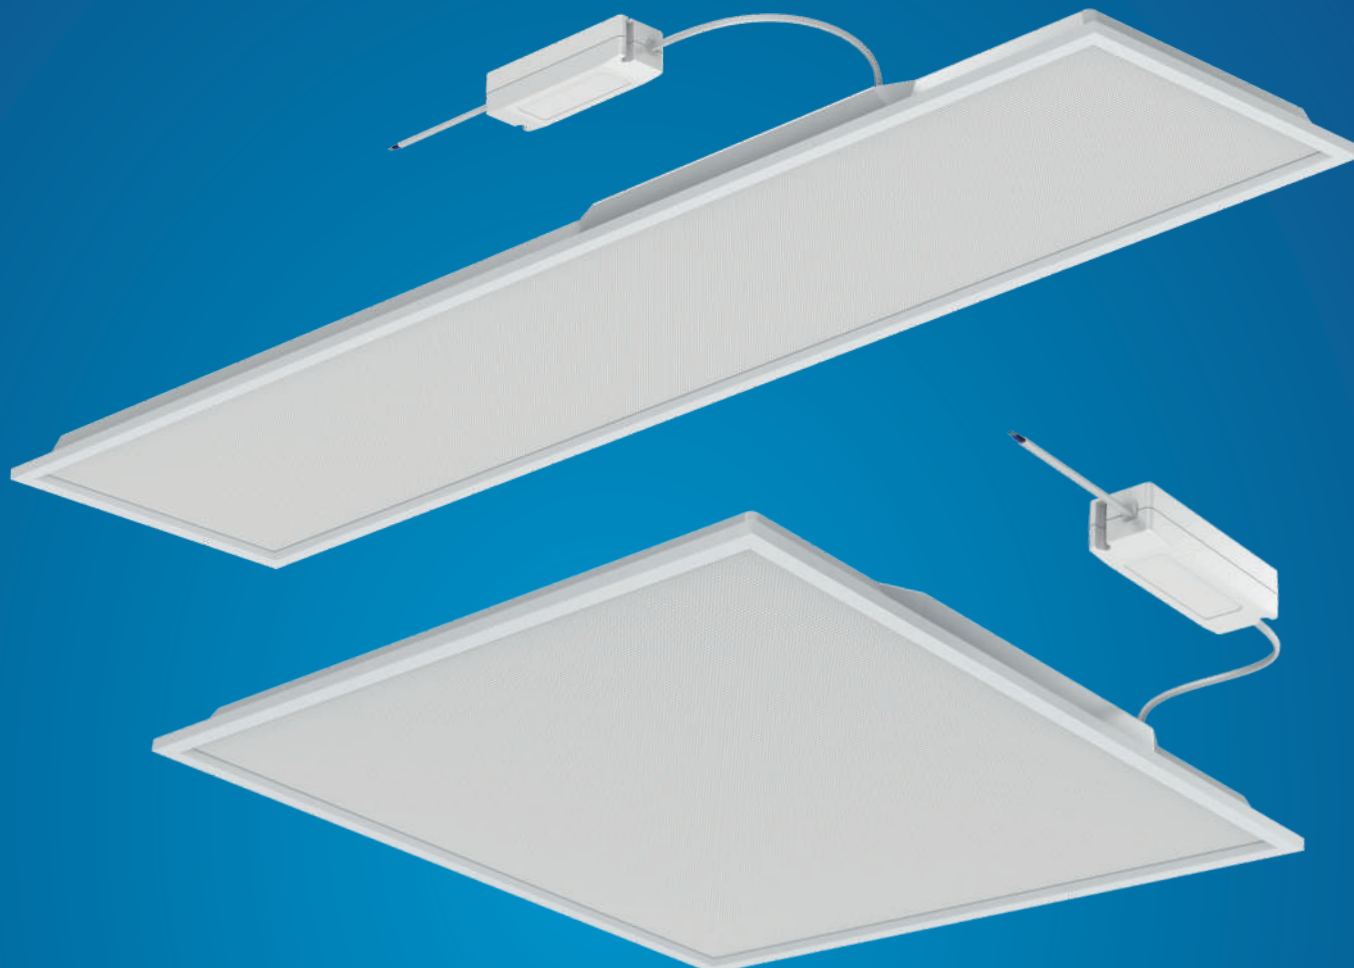

**MONOBLOCK SURFACE
MOUNTING FRAMES**
THICKNESS 6 CM



SURFACE MOUNTING FRAMES
KIT TO BE ASSEMBLED
THICKNESS 5CM - 7CM - 8CM



**RECESSED
MOUNTING FRAMES**
KIT TO BE ASSEMBLED



**FRAME FOR RECESS
POSITIONING OF PANELS**



**ANTI-FALL SAFETY WIRE AND
TERMINAL BLOCK**



**ADJUSTABLE
SUSPENSION KIT**



**METAL SPRINGS KIT FOR
RECESSED INSTALLATION
(NO BACKLIGHT)**



**ON/OFF, MULTICURRENT
DIMMABLE DALI AND
1-10V DRIVERS, STANDBY
EMERGENCY**

LED panels

SLIMFLUX BL UGR CCT - PRO

TPOLOGY

LED panel for direct lighting.

Luminaire with the possibility of selecting the colour temperature at the time of installation.

FEATURES

Remote power supply equipped with a dip-switch to select the colour temperature.

The backlit panel is composed of a metal material back compartment providing a heat sink function.

The LED sources positioned on a horizontal plate ensure lighting uniformity on the diffuser surface and ensure excellent efficiency levels.

Colour rendering: Ra>80, Ra>90.

INSTALLATION

Consider more depth for recessed installations.

Surface mounting: select the recommended frame from the accessories table.

MATERIAL

Painted white aluminium body.

Micro diffusive PMMA lens.


PACKAGING

4 pieces pack with single items' protection plastic bag.

NOTES

Providing greater visual comfort, improved definition of detail and reduction of stress.

The lumen and power data indicated refers to the 4000K colour temperature.

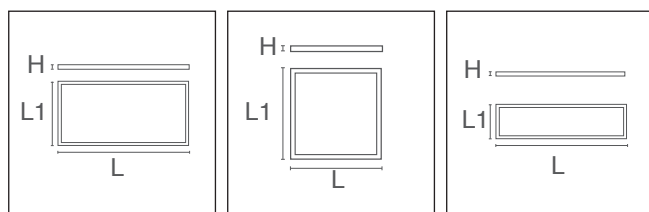

PRO	220-240 Vac		50000 h L80B20	IP20 VI IP43 VO	-25°C +40°C	Risk Group 0	UGR <19		
------------	-------------	--	----------------	-----------------	-------------	--------------	---------	--	--

W	lm	K	Ra	UGR	PF	L	L1	H			ART.
40	4500	3000-4000-6000	>80	<19	0,95	595	595	40	2230	4 / 4	LP6060B1UGR-8CCT
47	5500	3000-4000-6000	>80	<19	0,95	595	595	40	2230	4 / 4	LP6060B2UGR-8CCT ●
40	4000	3000-4000-6000	>90	<19	0,95	595	595	40	2230	4 / 4	LP6060B1UGR-9CCT
40	4000	3000-4000-6000	>90	<19	0,95	1195	295	40	2230	4 / 4	LP30120B1UGR-9CCT
50	5200	3000-4000-6000	>90	<19	0,95	1195	595	40	2230	4 / 4	LP60120B1UGR-9CCT

● On request.

LED panels

SLIMFLUX BL IP65 - PRO

**FLICKER
FREE** 

Providing greater visual comfort,
improved definition of detail and
reduction of stress.



**MONOBLOCK SURFACE
MOUNTING FRAMES**
THICKNESS 6 CM



SURFACE MOUNTING FRAMES
KIT TO BE ASSEMBLED
THICKNESS 5CM - 7CM - 8CM



**RECESSED
MOUNTING FRAMES**
KIT TO BE ASSEMBLED



**FRAME FOR RECESS
POSITIONING OF PANELS**



**ANTI-FALL SAFETY WIRE AND
TERMINAL BLOCK**



**ADJUSTABLE
SUSPENSION KIT**



**METAL SPRINGS KIT FOR
RECESSED INSTALLATION
(NO BACKLIGHT)**



**ON/OFF, MULTICURRENT
DIMMABLE DALI AND
1-10V DRIVERS, STANDBY
EMERGENCY**

LED panels

SLIMFLUX BL IP65 - PRO

TPOLOGY

LED panel with IP65 protection degree.

Direct lighting panel with rear dissipation shell.

FEATURES

Panel equipped with a resin coated power supply providing an IP65 connection to both the panel and exposed wiring: may be used in installations that are exposed to particularly difficult environmental conditions without the need for precautions to protect the driver. Equipped with a GORE-TEX® valve to compensate for pressure variations due to thermal changes and to prevent the formation of condensation in the fixture.

INSTALLATION

Consider more depth for recessed installations.

Surface mounting: select the recommended frame from the accessories table.

MATERIAL

Painted white aluminium body; PMMA screen.

APPLICATIONS


Panel suitable for outdoor installations and in places such as bathrooms, kitchens, plant areas etc.







PACKAGING

6 pieces pack with single items' box.

NOTES

Providing greater visual comfort, improved definition of detail and reduction of stress.



PRO	220-240 Vac	Ra >80		50000 h L70B20	IP65	-25°C +40°C	Risk Group 0		120°		
W	Im	K	Ra	PF	L	L1	H			ART.	
40	4000	4000	>80	0,95	595	595	36	1850	1 / 6	LP6060B1NEX	

LED panels

SLIMFLUX BL SENSOR


**FLICKER
FREE** 

Providing greater visual comfort,
improved definition of detail and
reduction of stress.




REMOTE-CONTROLLED SENSOR FUNCTIONS

- 1- ON/OFF
- 2- Dimming
- 3- Motion sensor function.
- 4- ON and dimming function according to the illuminance in the room.

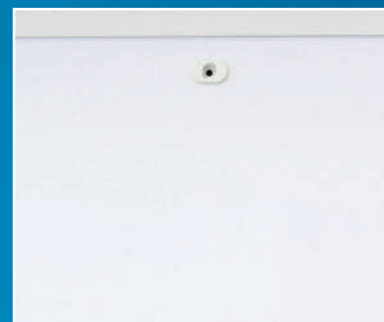

LED PANEL WITHOUT REMOVABLE SENSOR

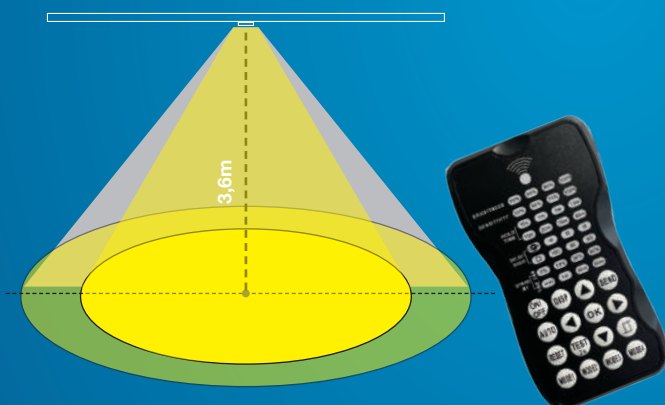

MOTION DETECTION
HIGH-SENSITIVITY AREA

REMOTE CONTROL
RANGE UP TO 15M

PLUG-IN SENSOR

SENSOR DETAILS



Download photometries
www.duralamp.com

REAL LUMENS

Luminous Flux Data is REAL. Values are measured on actual use conditions.
Nominal values of the LED source are not stated.

LED panels

SLIMFLUX BL SENSOR

TPOLOGY

Direct-light LED panel, equipped with sensor remote-controlled. Via the remote control it is possible to switch the luminaire on and off, dim and select the lighting mode with motion detection or room brightness detection.

FEATURES

The backlit panel is composed of a metal material back compartment providing a heat sink function. The sensor can be removed; replacement sensor available as a separate part number (KTLP-SR). Without sensor, the panel operates On/Off. Colour rendering: Ra>90.

INSTALLATION


Consider more depth for recessed installations. Surface mounting: select the recommended frame from the accessories table.

MATERIAL

Painted white aluminium body; anti-yellowing PS screen.

NOTES

Providing greater visual comfort, improved definition of detail and reduction of stress.



PRO	220-240 Vac	Ra >90		50000 h L70B20	IP20 VI IP40 VO	-25°C +40°C	Risk Group 0	UGR <19		
------------	-------------	--------	--	----------------	-----------------	-------------	--------------	---------	--	--

SLIMFLUX BL - SENSOR

	W	Im	K	Ra	PF	L	L1	H			ART.
New	36	4000	4000	>90	0,9	595	595	32	3000	6 / 6	LP6060B1UGRS-940

REMOTE CONTROL FOR SENSOR PANEL



			ART.
New	Remote control for sensor panel	1 / 1	KTLP-TC

SPARE SENSOR



		L1	H		ART.
New	Panel sensor	20.5	14.9	1 / 1	KTLP-SR

The same sensor device is included into the single panels' box.

LED panels

SLIMFLUX BL PLAFO + UGR - PLUS

**FLICKER
FREE** 

Providing greater visual comfort,
improved definition of detail and
reduction of stress.



Speed of installation compared to
using a separate panel and frame.



Download photometries
www.duralamp.com

REAL LUMENS

Luminous Flux Data is REAL. Values are measured on actual use conditions.
Nominal values of the LED source are not stated.

LED panels

SLIMFLUX BL PLAFO + UGR - PLUS

TPOLOGY

Backlit panel with integrated 4 cm thick frame for surface installation.

Also available in a UGR version.

FEATURES

Fixtures can be also be surface mounted both vertically and horizontally.

Speed of installation compared to using a separate panel and frame.

The positioning of the LED sources on a horizontal plate ensures lighting uniformity on the screen surface and excellent efficiency levels.

If you want to dim or use the multicurrent power supply dimmer, see the relevant page of the catalogue.

Colour rendering: Ra>80.

MATERIAL



Painted white aluminium body; high-transmittance PMMA primary optics.

PACKAGING

5 pieces pack with single items' box (except 60x120, 3 pieces).

NOTES

Providing greater visual comfort, improved definition of detail and reduction of stress.

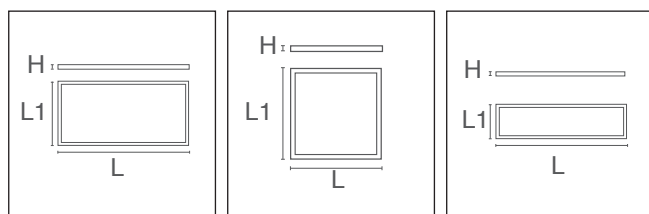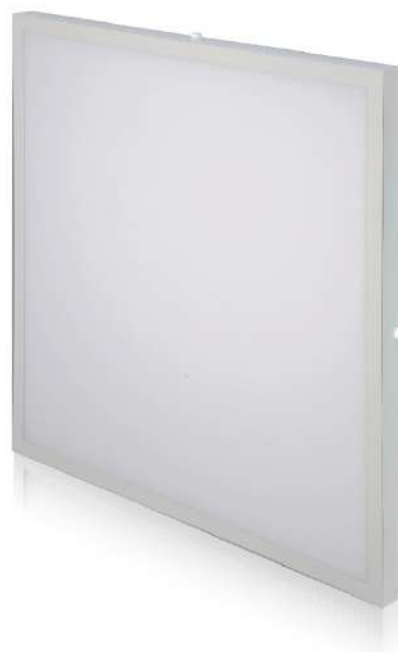

PLUS	220-240 Vac	Ra >80		35000 h L70B20	IP20 VI IP43 VO	-25°C +35°C	Risk Group 0		
-------------	-------------	--------	--	----------------	-----------------	-------------	--------------	--	--

W	lm	K	Ra	UGR	PF	L	L1	H			ART.
40	4000	4000	>80		0,95	600	600	40	1850	1 / 5	LP6060P1-840
60	6000	4000	>80		0,95	600	600	40	1850	1 / 5	LP6060P2-840
60	6000	6000	>80		0,9	600	600	40	1850	1 / 5	LP6060P2-860
40	4000	4000	>80		0,95	1200	300	40	1900	1 / 5	LP30120P1-840
40	4000	4000	>80	<19	0,95	600	600	40	1850	1 / 5	LP6060P1UGR-840
60	6000	4000	>80		0,95	1200	600	40	4800	1 / 3	LP60120P1-840

LED panels

SLIMFLUX ROUND - PLUS



THE POWER CABLE IS ONE WITH THE SUSPENSION CABLES, THEREFORE INVISIBLE.



LIGHT IS DIFFUSED FROM THE FINE WHITE FRAME TO THE METHACRYLATE PANEL. FRACTIONED BY MICRO INCISIONS ON THE PANEL LIGHT IS DIRECTED PREDOMINANTLY DOWNWARDS. 30% OF THE LIGHT IS PROJECTED UPWARDS TO CREATE A STRIKING EFFECT THAT ADDS TO ANY CLASSIC OR MODERN ENVIRONMENT.

30%



70%



NOTES:
THE ROUND TRANSLUCENT UP&DOWN PANELS ARE COMPLETE WITH SUSPENSION CABLES AND DRIVER INTEGRATED IN THE CEILING ROSE.
MAXIMUM SUSPENSION LENGTH 150 CM.

LED panels

SLIMFLUX ROUND - PLUS

TPOLOGY

Slim LED panel.

FEATURES

Light is diffused from the thin white frame to the methacrylate panel.

INSTALLATION

Possibility of installing TONDO 60: recessed or surface mounted, in which case the panel remains 35 mm away from the ceiling.

TONDO TRASLUCIDE SUSPENSION: power supply unit integrated in ceiling rose.

The power cable is one with the suspension cables, therefore invisible.

Adjustable suspension wires: MAX 150 cm.

Cable attachment with screw and steel cylinder.


MATERIAL

White painted metal body; frontal methacrylate panel.

High transmittance optical PMMA screen.

PACKAGING

5 pieces pack with single items' box.

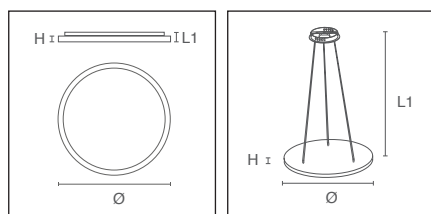

PLUS	220-240 Vac	Ra 80		30000 h L70B20	IP20	-25°C +40°C	Risk Group 0		112°	
-------------	-------------	-------	--	----------------	------	----------------	--------------	--	------	--

SLIMFLUX ROUND SURFACE MOUNTING - PLUS

W	lm	K	PF		L1	H			ART.
40	3800	3000	0.95	593	33.5	19.5	3460	1 / 5	LP60T830-A
40	4000	4000	0.95	593	33.5	19.5	2600	1 / 5	LP60T840-A

PLUS	220-240 Vac	Ra 80		30000 h L70B20	IP20	-25°C +40°C	Risk Group 0		
-------------	-------------	-------	--	----------------	------	----------------	--------------	--	--

SLIMFLUX ROUND TRANSLUCENT UP&DOWN SUSPENSION - PLUS

W	lm	K	PF		L1	H			ART.
40	3800	3000	0.95	593	150	19.5	2600	1 / 5	LP60T830DE-A
40	4000	4000	0.95	593	150	19.5	2600	1 / 5	LP60T840DE-A

LED panels

SLIMFLUX TRANSLUCENT UP&DOWN - PLUS

30% ↑



70% ↓

THE POWER CABLE IS ONE
WITH THE SUSPENSION
CABLES, THEREFORE
INVISIBLE.

LIGHT IS DIFFUSED FROM
THE FINE WHITE FRAME TO
THE METHACRYLATE PANEL.
FRACTIONED BY MICRO INCISIONS
ON THE PANEL LIGHT IS DIRECTED
PREDOMINANTLY DOWNWARDS.
30% OF THE LIGHT IS PROJECTED
UPWARDS TO CREATE A
STRIKING EFFECT THAT ADDS
TO ANY CLASSIC OR MODERN
ENVIRONMENT.

NOTES:
THE TRANSLUCENT UP&DOWN
30X120 PANELS ARE COMPLETE
WITH SUSPENSION CABLES AND
DRIVER INTEGRATED IN THE
CEILING ROSE.
MAXIMUM SUSPENSION LENGTH
150 CM.

DIMMABILITY
CAN BE USED WITH 0-10V
DIMMERS

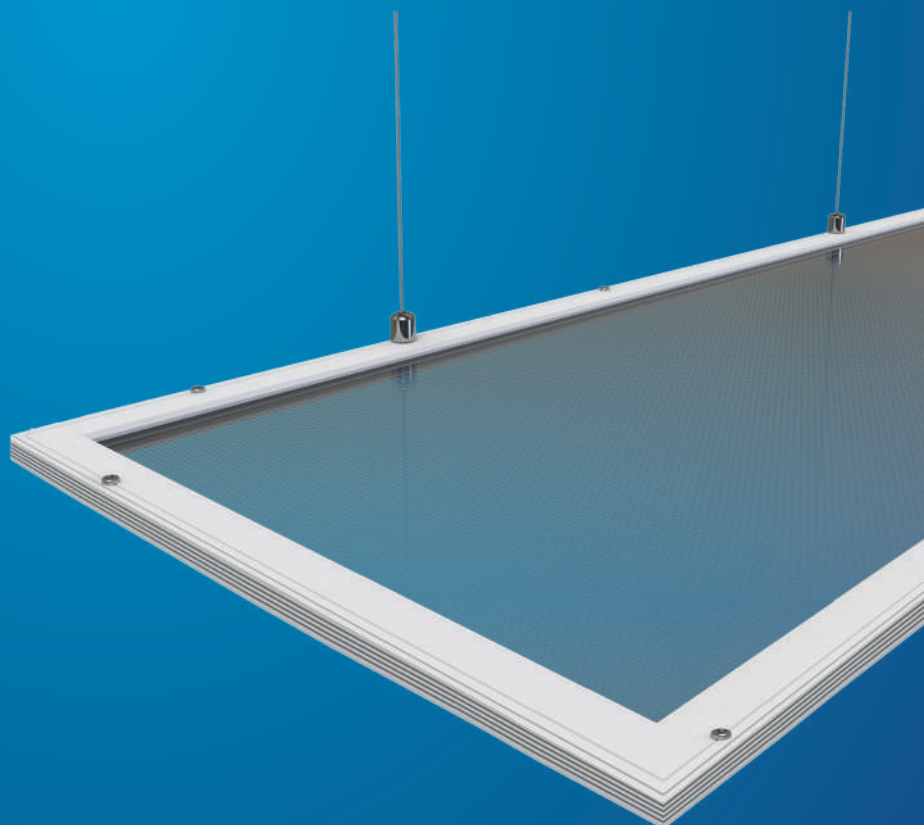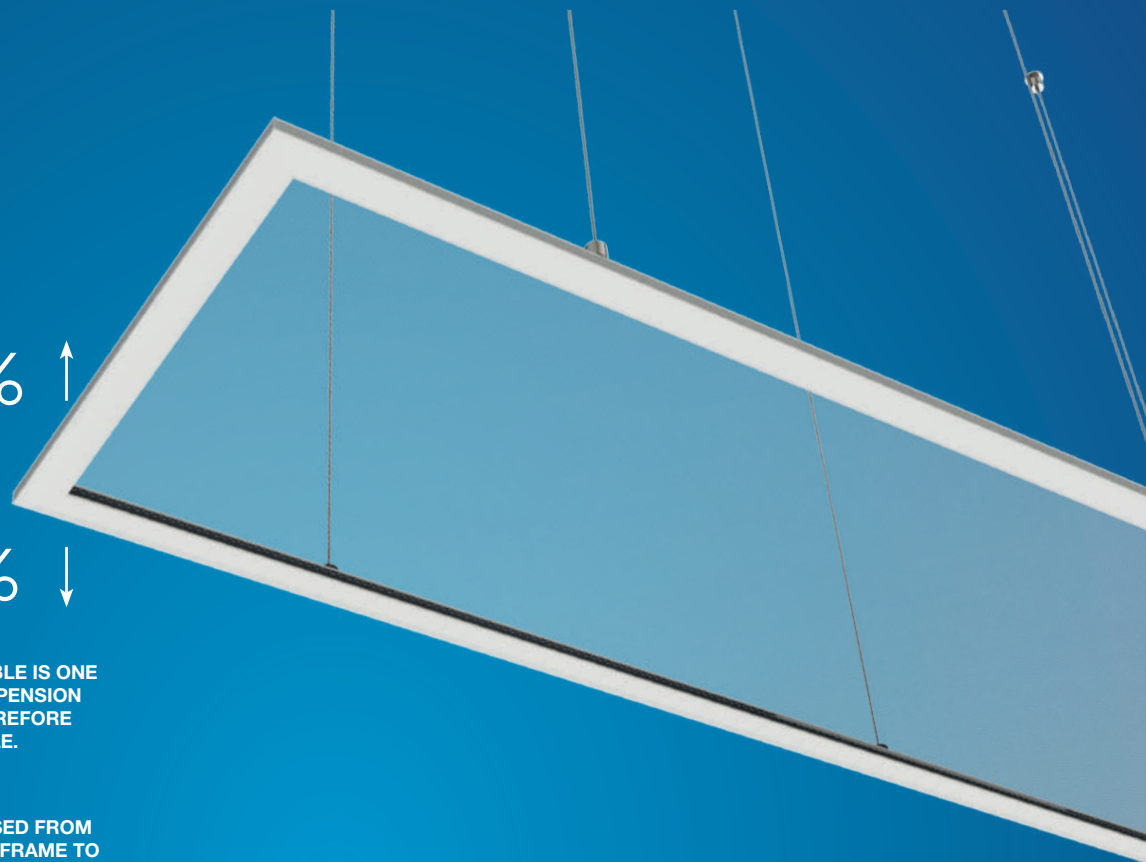

LED panels

SLIMFLUX TRANSLUCENT UP&DOWN - PLUS

TPOLOGY

Translucent LED panel with double emission, dimmable.

FEATURES

Fixture with visual interest characterised by dual emission - 70% downwards and 30% upwards - along with the translucency of the panel itself.

MATERIAL

White frame with methacrylate panel.

High transmittance optical PMMA screen.

USAGE INFORMATION

DIMMABILITY: can be used with 0-10V dimmers.

POWER SUPPLY

The luminaire comes complete with a remote power supply integrated into one of two white metal parallelepipeds to be fixed to the ceiling.


PACKAGING

5 pieces pack with single items' box.

NOTES

Adjustable suspension wires: MAX 150 cm.

Cable attachment with screw and steel cylinder.



PLUS	220-240 Vac	Ra 80	0-10V	30000 h L70B20	IP20	-25°C +40°C	Risk Group 0	120°	G3
-------------	-------------	-------	-------	----------------	------	----------------	--------------	------	----

W	lm	K	Ra	PF	L	L1	H			ART.
40	3800	3000	80	0.95	1200	300	14.5	3500	1 / 5	LP30120T830DE-A
40	4000	4000	80	0.95	1200	300	14.5	3500	1 / 5	LP30120T840DE-A

Frames & Accessories for LED PANELS

	LPLAFO60	LPLAFO603	LPLAFO604	LPLAFO607	LPLAFO60P	LPLAFO60R	LPLAFO120	LPLAFO1203	LPLAFO301204	LPLAFO301207	LPLAFO30120R	LPLAFO30120P	LPLAFO601204	LPLAFO601207	KTLPW1-MS	LP-SSK	FASTCON-30	KTLP-SPU	KTLP-SR	KTLP-TC
LP30120B1UGR-840									x	x	x	x			x	x	x	x		
LP30120B1UGR-9CCT										x	x	x			x	x	x	x		
LP30120B3UGR-840ST									x	x	x	x			x	x	x	x		
LP30120P1-840															x	x	x			
LP30120S3-840							x	x	x	x	x	x			x	x	x	x		
LP30120UGR-840C							x	x	x	x	x	x			x	x	x	x		
LP60120B1UGR-9CCT													x	x		x	x			
LP60120P1-840																x	x			
LP6060B1-840			x	x	x	x									x	x	x	x		
LP6060B1NEX			x	x	x	x									x	x	x	x		
LP6060B1UGR-840			x	x	x	x									x	x	x	x		
LP6060B1UGR-840HP			x	x	x	x									x	x	x	x		
LP6060B1UGR-840Z1			x	x	x	x									x	x	x	x		
LP6060B1UGR-8CCT				x	x	x									x	x	x	x		
LP6060B1UGR-930			x	x	x	x									x	x	x	x		
LP6060B1UGR-940			x	x	x	x									x	x	x	x		
LP6060B1UGR-9CCT				x	x	x									x	x	x	x		
LP6060B1UGRS-940			x	x	x	x									x	x	x	x	x	x
LP6060B2UGR-8CCT				x	x	x									x	x	x	x		
LP6060B3-830ST			x	x	x	x									x	x	x	x		
LP6060B3-840	x	x	x	x	x	x									x	x	x	x		
LP6060B3-840ST			x	x	x	x									x	x	x	x		
LP6060B3-860ST			x	x	x	x									x	x	x	x		
LP6060B3UGR-840ST			x	x	x	x									x	x	x	x		
LP6060P1-840																				
LP6060P1UGR-840																				
LP6060P2-840																				
LP6060P2-860																				
LP6060S3-840	x	x	x	x	x	x									x	x	x	x		
LP6060S3UGR-840	x	x	x	x	x	x									x	x	x	x		
LP6060UGR-840C	x	x	x	x	x	x									x	x	x	x		
LP6262UGR-840															x	x	x	x		

Drivers for LED PANELS


	A01484	A01485	A01486	DELT40D-10V	DELT40D-D	DELT40D-M	DELT60D-D	DELT65D-M	ZK600-14000S	ZKLP600EL	ZKLP700EL	KTEMR03	Emergency kit
LP30120B1UGR-840			x	x		x	x		x	x		x	
LP30120B1UGR-9CCT								x	x			x	
LP30120B3UGR-840ST	x		x	x	x	x		x	x			x	
LP30120P1-840													
LP30120S3-840		x	x	x		x			x		x	x	
LP30120UGR-840C			x	x		x			x	x		x	
LP60120B1UGR-9CCT							x					x	
LP60120P1-840													
LP6060B1-840	x		x	x		x		x	x			x	
LP6060B1NEX													
LP6060B1UGR-840			x	x		x			x	x		x	
LP6060B1UGR-840HP			x	x	x	x	x	x	x			x	
LP6060B1UGR-840Z1		x	x	x		x			x		x	x	
LP6060B1UGR-8CCT							x					x	
LP6060B1UGR-930		x	x	x		x		x	x			x	
LP6060B1UGR-940		x	x	x		x		x	x			x	
LP6060B1UGR-9CCT					x		x					x	
LP6060B1UGRS-940													
LP6060B2UGR-8CCT							x					x	
LP6060B3-830ST	x		x	x		x		x				x	
LP6060B3-840													
LP6060B3-840ST	x		x	x		x		x				x	
LP6060B3-860ST	x		x	x		x		x				x	
LP6060B3UGR-840ST	x		x	x	x	x		x				x	
LP6060P1-840													
LP6060P1UGR-840													
LP6060P2-840													
LP6060P2-860													
LP6060S3-840		x	x	x		x					x	x	
LP6060S3UGR-840		x	x	x		x					x	x	
LP6060UGR-840C			x	x		x			x		x	x	
LP6262UGR-840	x	x	x	x	x	x	x	x				x	

Accessories


PANEL ACCESSORIES




PLUS FRAMES FOR MOUNTING LED PANELS ON CEILINGS

	L	L1	H		ART.
PLUS frame for 60 x 60 - h 60 panel	603	603	60	1 / 1	LPLAFO60
PLUS frame for 120 x 30 - h 60 panel	1203	303	60	1 / 1	LPLAFO120

Frames for mounting LED panels on ceilings.
Screwless one piece painted metal.
Surface mounting installation with bracket.
Screws and plugs supplied.

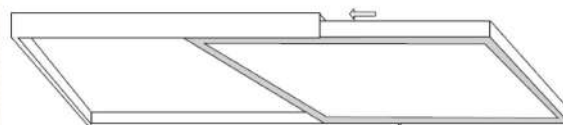

FRAMES FOR MOUNTING LED PANELS ON CEILINGS - H50


	L	L1	H		ART.
Basic model for 60 x 60 - h 50 panel	600	605	50	1 / 40	LPLAFO603 ▼
Basic model for 120 x 30 - h 50 panel	1200	300	50	1 / 20	LPLAFO1203

Basic model in kit form to be assembled - h 50.
Epoxy painted extruded aluminium separated into 4 bars to be assemble while mounting. Easy and fast mounting directly on the surface.
White color.


▼ To be discontinued.

Accessories

PANEL ACCESSORIES

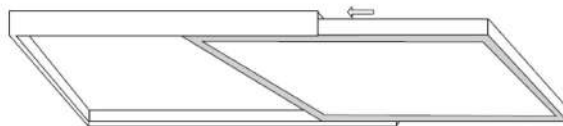


FRAMES FOR MOUNTING LED PANELS ON CEILINGS - H70


		L	L1	H		ART.
New	Basic model for 60 x 60 - h 70 panel	600	600	70	1 / 20	LPLAFO607
New	Basic model for 30 x 120 - h 70 panel	300	1200	70	1 / 20	LPLAFO301207
New	Basic model for 60 x 120 - h 70 panel	600	1200	70	1 / 20	LPLAFO601207

Basic model in kit form to be assembled - h 70.

Epoxy painted extruded aluminium separated into 4 bars to be assemble while mounting. Easy and fast mounting directly on the surface. White color.

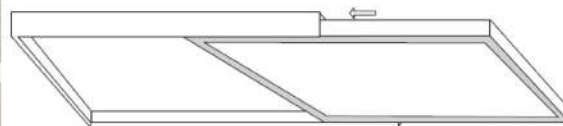

FRAMES FOR MOUNTING LED PANELS ON CEILINGS - H80


		L	L1	H		ART.
	Basic model for 60 x 60 - h 80 panel	598	598	80	1 / 25	LPLAFO604
	Basic model for 30 x 120 - h 80 panel	1198	298	80	1 / 20	LPLAFO301204
	Basic model for 60 x 120 - h 80 panel	1198	598	80	1 / 20	LPLAFO601204

Basic model in kit form to be assembled - h 80.


Epoxy painted extruded aluminium separated into 4 bars to be assemble while mounting. Easy and fast mounting directly on the surface. White color.

Accessories

PANEL ACCESSORIES

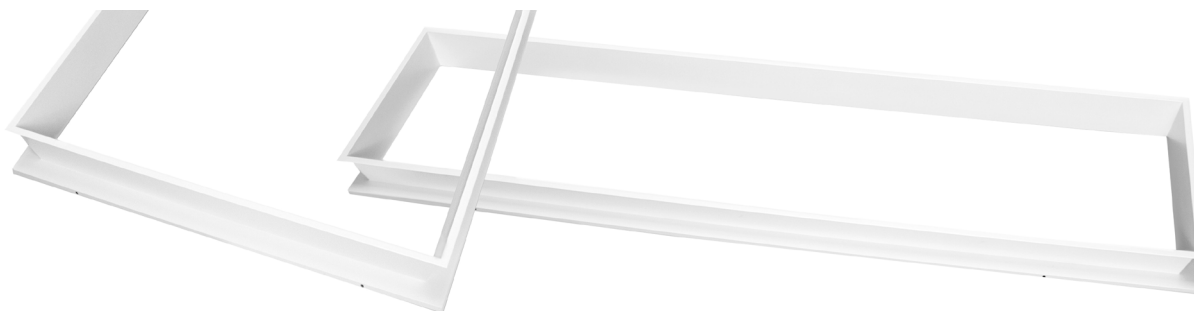

FRAME FOR RECESSED INSTALLATION

		L	L1	H		ART.
New	Frame recessed installation 60 x 60 panel	605	605	90.5	4 / 4	LPLAFO60R
New	Frame recessed installation 30 x 120 panel	1235	335	25	4 / 4	LPLAFO30120R

Frame for recessed installation of LED panels in non-modular ceilings.


The panel remains recessed 8 cm into the ceiling for a softer, more pleasant illumination.

Recess depth: the panel rests on the frame, so consider 8 cm of the depth of the frame + the thickness of the panel + the necessary ventilation space

The frame consists of a one piece body ready for insertion in the ceiling.



FRAME WITH SPRINGS FOR RECESSED INSTALLATION OF LED PANELS

		L	L1	H		ART.
	Frame for 60 x 60 LED panels	630	630	30	1 / 20	LPLAFO60P
New	Frame for 30 x 120 LED panels	1235	335	25	1 / 20	LPLAFO30120P

Frame with springs for recessed installation of LED panels in non-modular ceilings.

Set of 4 extruded aluminium profiles to be easily assembled with corner spring-brackets.

White color.

Accessories

ACCESSORIES - VARIOUS

ADJUSTABLE SUSPENSION CABLES



	L		ART.
Adjustable steel cables	2000	1 / 1	KTLP-SPU


ADJUSTABLE STEEL CABLES




	L		ART.
Adjustable steel cables	1500	1 / 1	KTLP-SP ▼
▼ To be discontinued.			

JUNCTION BOX FOR CONNECTION



	L		ART.
Junction box		1 / 1	FASTCON-30
Junction box for connection to the power supply network, prepared for connection in cascade (cable length 27 cm).			



	L		ART.
Safety wire and terminal block	1200	1 / 1	LP-SSK
Junction box for connection to the mains, prepared for connection in cascade, equipped with safety suspension kit with steel cable for installations in seismic zones.			

METAL SPRINGS KIT



		ART.
Metal springs kit	1 / 1	KTLPW1-MS
Metal springs kit for recessed installation - 4 pieces.		



FASTCON-30	35	LP6060P2-860	25
KTLP-SP	35	LP6060S3-840	11
KTLP-SPU	35	LP6060S3UGR-840	11
KTLP-SR	23	LP6060UGR-840C	13
KTLP-TC	23	LP60T830-A	27
KTLPW1-MS	35	LP60T830DE-A	27
LP-SSK	35	LP60T840-A	27
LP30120B1UGR-840	17	LP60T840DE-A	27
LP30120B1UGR-9CCT	19	LP6262UGR-840	13
LP30120B3UGR-840ST	15	LPLAFO120	32
LP30120P1-840	25	LPLAFO1203	32
LP30120S3-840	11	LPLAFO301204	33
LP30120T830DE-A	29	LPLAFO301207	33
LP30120T840DE-A	29	LPLAFO30120P	34
LP30120UGR-840C	13	LPLAFO30120R	34
LP60120B1UGR-9CCT	19	LPLAFO60	32
LP60120P1-840	25	LPLAFO601204	33
LP6060B1-840	17	LPLAFO601207	33
LP6060B1NEX	21	LPLAFO603	32
LP6060B1UGR-840	17	LPLAFO604	33
LP6060B1UGR-840HP	17	LPLAFO607	33
LP6060B1UGR-840Z1	17	LPLAFO60P	34
LP6060B1UGR-8CCT	19	LPLAFO60R	34
LP6060B1UGR-930	17		
LP6060B1UGR-940	17		
LP6060B1UGR-9CCT	19		
LP6060B1UGRS-940	23		
LP6060B2UGR-8CCT	19		
LP6060B3-830ST	15		
LP6060B3-840 *	15		
LP6060B3-840ST	15		
LP6060B3-860ST	15		
LP6060B3UGR-840ST	15		
LP6060P1-840	25		
LP6060P1UGR-840	25		
LP6060P2-840	25		



1. Applicability

1.1 These general conditions (hereafter the "Conditions") constitute an integral and essential part of the contract of sale between the Parties. The Conditions shall regulate all legal relationships between Dura Lamp Srl (hereafter "Dura Lamp") and the purchaser (hereafter the "Purchaser") where the said relationships are not disciplined by the applicable terms of the Italian Civil Code (C.C.). The nullity of any of the terms of these Conditions shall not prejudice the validity of the remaining Conditions or the Contract.

1.2 Any changes to these Conditions shall be agreed between the Parties in writing, with the exception of the provisions set down in article 1341 of the Italian C.C..

2. Sales

2.1 Sale requests for the products (hereafter the "Products") shall be accepted 'subject to the seller's approval' and shall be considered to be irrevocable in accordance with and as an effect of article 1329 of the C.C. for a period of 1 (one) month from the date of the order requesting execution without prior acknowledgement, pursuant to and as an effect of article 1327 of the C.C. from the date on which the order is received by Dura Lamp.

2.2 The Products detailed in the individual orders and the relevant accessories shall be supplied to the Purchaser by Dura Lamp with "Retention of Title" pursuant to and as an effect of articles 1523-1526 of the Italian C.C. In this case, the transfer of ownership of the Products to the Purchaser shall take place exclusively upon the full payment of the price agreed, whilst any risks shall be the responsibility of the Purchaser from the moment of delivery of the Products.

2.3 Whilst confirming the terms stated above, the Parties hereby agree that should the Products and relevant accessories be destroyed for causes not attributable to Dura Lamp, the Purchaser shall not be released from the obligation to pay for the same, even where the Products have not yet been delivered.

3. Prices

3.1 The prices detailed on the price list shall be applied to Product sales orders. The aforementioned prices shall be unit prices per single item, except where stated otherwise for certain Products. The Parties shall have the right to agree, in writing, any derogations and/or special conditions of sale.

3.2 Moreover, the Parties hereby agree that the following conditions shall be applied:

- (I) Minimum order: € 300 (three hundred) for Italy - € 750 (seven hundred and fifty) for other countries;
- (II) Delivery free to destination in Italy for orders of € 300 (three hundred) for Italy or more;
- (III) Ex-Works deliveries for other countries.

3.3 The prices given above do not include VAT and installation costs.

3.4 The prices provided in this catalogue shall be valid until a new price list is published.

4. Currency

All prices are given in Euros (exclusive of VAT). Invoices shall be drawn up in Euros.

5. Special requests

Products can be supplied to the Purchaser in non-standard colours and with special features. The relevant price, minimum quantities per order, methods and timing of deliveries shall be agreed in each individual case, in relation to the reference order.

6. Transport

6.1 Dura Lamp shall not be liable for any damage and/or losses which may occur during the transportation of the Products, unless the Products are delivered free at destination.

6.2 Dura Lamp shall have the right to establish the method of transportation to be used for the Products, unless the Parties have previously established a method of transport in writing.

6.3 Upon delivery, the Purchaser shall undertake to verify the condition of the products and shall make any complaints directly to the carrier and/or conduct any actions necessary in the event of loss, misplacement, removal or damage, or delays in transportation and/or the methods of delivery of the Products.

7. Complaints

7.1 In the event that the Products are found to have any faults and/or defects, the Purchaser shall undertake to notify Dura Lamp of the same in writing, by means of a registered letter, no later than 8 (eight) days following the discovery of the said faults and/or defects, at the risk of invalidating the obligations of the guarantee provided by Dura Lamp. In this case, the faulty Products, which should be reported within the terms established, should be returned to Dura Lamp, once the Purchaser has received specific permission to do so in writing.

7.2 In the event that the Purchaser's complaints are held to be valid, Dura Lamp, at its complete discretion, may make the necessary repairs and/or replace the Products, excluding the attribution of any further charges, obligations, indemnification or compensation to the same. The Products in question should be returned to the Dura Lamp Srl plant in Via Pratese 164, 50145, Firenze, Italy. In the event that, following an inspection by Dura Lamp, the Products returned by the Purchaser are not found to be faulty and/or defective, Dura Lamp shall return the Products to the Purchaser, charging the same an amount equal to 15% (fifteen percent) of the value of the said Products.

8. Delivery

8.1 The Parties hereby agree that the terms established for the delivery of the Products shall not be considered absolute or essential and that, in any case, each item shall be exclusively in favor of Dura Lamp, unless otherwise agreed in writing between the Parties.

8.2 In the event of delayed delivery, once 15 (fifteen) days have passed since the agreed date, the Purchaser may send Dura Lamp written warning to complete the delivery within a further term of no more than 15 (fifteen) days from receipt of the same. In the event that Dura Lamp has not completed the delivery within this further term the Purchaser may withdraw from the order with regard to the Products that have not yet been delivered. In this case the Purchaser shall only be obliged to pay Dura Lamp for the Products actually delivered, excluding the payment of any further indemnification and/or compensation to the Purchaser.

8.3 Dura Lamp shall not be responsible for any other breaches, including the failure to deliver or delayed delivery of the Products, caused by events outside its reasonable control such as, purely by way of an example and not limited to the same: the failure to deliver or delayed delivery of manufacturing materials by Dura Lamp's suppliers, equipment breakdowns, strikes and other trade union action, electricity blackouts, suspension of or difficulties with transportation.

9. Payment

9.1 The price due shall be paid by the Purchaser according to the conditions and modalities set down in the order and, in any case, by means of payments made exclusively to "DURA LAMP Srl".

9.2 Dura Lamp shall only recognize the validity of the payments when the same are made in compliance with the provisions of article 9.1 above. This means that amounts paid using any other method shall not be considered to be a payment in discharge of the Purchaser's obligations. The eventual acceptance by Dura Lamp of a bank draft or other trade bill shall only occur with the application of the proviso "under usual reserve".

9.3 In the event of delayed payment with respect to the terms agreed, the Parties hereby agree that bank interest shall be due to Dura Lamp at the current PRIME RATE increased by 3 points. interest shall be applied as of right, with no obligation for Dura Lamp to send the Purchaser a formal notice to pay.

9.4 Moreover, in the event of a delay in payment of more than 15 (fifteen) days, Dura Lamp shall have the right to terminate the order as of right pursuant to article 1456 C.C., sending written notification of the same, barring compensation for any damage.

9.5 In the event that the Parties have agreed upon a method of payment by instalments for the Products, the failure to pay several instalments or just one instalment exceeding one eighth of the overall price of the Products, shall result in the loss of the Purchaser's right to pay in instalments and shall give Dura Lamp the right to request the remaining balance of the price or, alternatively, at its own discretion, to terminate the contract with immediate return of the Products and the acquisition of the instalments paid, as indemnification, barring the right to compensation for any damage sustained.

10. Guarantee

10.1 The Products provided by Dura Lamp shall be guaranteed for a period of 12 (twelve) months from the date of delivery against any manufacturing or material defects and/or faults and against any breakdowns not attributable to the Purchaser. Dura Lamp's only obligation and the Purchaser's right with regard to claims related to the guarantee shall be limited, as decided by Dura Lamp, to the replacement or repair of the defective or non-compliant product or the reimbursement of the price for the purchase of another product. Dura Lamp shall be granted a reasonable amount of time to repair or replace the product, or to make the previously authorized reimbursement. Any defective or non-compliant Products shall become the property of Dura Lamp as soon as they have been replaced or reimbursed.

10.2 The guarantee shall exclude any failures due to circumstances beyond the control of Dura Lamp (lightning, flooding, etc.), as well as any damage caused by the improper use of the Products and/or relevant accessories. Notwithstanding the above, Dura Lamp shall not be bound by the guarantee if the contested defects or non-compliances have occurred as a result of submitting the Products to resistance or environmental tests, the incorrect use of the same, or in the event that the use of or conditions of use of the Products is different from that indicated in the instructions and technical information, as a result of negligence, incorrect installation or accident, or if they derive from improper repairs, alterations, modifications, storage or transportation or by incorrect handling.

10.3 The Purchaser shall send the Products returned in accordance with the terms of the guarantee to the place indicated by Dura Lamp in compliance with the Dura Lamp policy regarding authorization to return materials in force at the time. In the event that the Products returned are found to be compliant or not faulty, the Purchaser shall pay the cost of returning the same as well as the cost of insuring, inspecting and handling the Products.

10.4 LED products Enjoy specific guarantees: details are published on www.duralamp.com

11. Limitation of Liability

11.1 With the sole exclusion of criminal intent and gross negligence, Dura Lamp shall not be liable for loss of profits or savings, loss of reputation or goodwill, any direct, indirect, consequential or special damage that may derive from or be connected to the contract or sale of products or services by Dura Lamp or by the use of the same of a contractual or extra-contractual nature or deriving from any other source, even where Dura Lamp has been notified of or is aware of the possibility of such damage.

11.2 The limitations and exclusions stated in article 11 shall apply within the limits permitted by law.

12. Applicable law and place of jurisdiction

12.1 These Conditions and all the effects of the same shall be governed by Italian law. The Parties hereby agree that any disputes related to these Conditions shall refer to Italian jurisdiction to the exclusion of all others.

12.2 The exclusive place of jurisdiction shall be the registered offices of Dura Lamp Srl, with the express exclusion of any other competing places of jurisdiction.



DURA LAMP S.r.l.
Registered office Via Pratese, 164 – 50145 Firenze
Tel. 055 894 881
e-mail: duralamp@duralamp.it

Registered with the Florence Company Register -
C.F. and VAT number 03312240488
Registered with R.E.A. of Florence at n. 353287 Share capital € 400,000.00 i.v.
Subject to the management and coordination of 3F FILIPPI Srl



A complete list of the Dura Lamp distribution
and project network is available at:

www.duralamp.com

DURALAMP | UNICO Catalogue 24/25

© Copyright 2024 - Dura Lamp S.r.l.

All data and pictures provided in this catalogue are for reference only: since they might change during mass production, they have to be considered nominal values with tolerances. Dura Lamp reserves the right to modify its products in any moment, for technical or commercial reasons.

Photos: Ivan Rossi - Studio Artale - Studio Ceccanti - Alessandro Maurelli - Luca Visentini

Graphic project: Lorenzetti Communication and FD Graphic Studio

Indoor or outdoor setting photos are used to illustrate the possible applications of the product.

[illegible]



duralamp.com