

DURA
LAMP

PANELS AND
ACCESSORIES

UPDATED
2025



LUMINOUS FITTINGS





Luminous Fittings

LED panels



10 **BASIC**
SLIMFLUX SL +
UGR - BASIC



12 **BASIC**
SLIMFLUX BL +
UGR - BASIC



14 **PRO**
SLIMFLUX BL +
UGR - PRO



16 **PRO**
SLIMFLUX BL UGR
CCT - PRO



18 **PRO**
SLIMFLUX BL IP65
- PRO



20 **PRO**
SLIMFLUX BL
SENSOR



22 **PRO**
SLIMFLUX UGR
DRIVER NON
INCLUSO - PRO



24 **PLUS**
SLIMFLUX BL
PLAFO + UGR -
PLUS



26 **PLUS**
SLIMFLUX ROUND
- PLUS



28 **PLUS**
SLIMFLUX
TRANSLUCENT
UP&DOWN - PLUS

Accessories



32
PANEL
ACCESSORIES




35
ACCESSORIES -
VARIOUS

Led PANELS

Sidelight

BASIC SLIMFLUX SL + UGR

The classic side-illuminated panels, very low thickness and UGR <19 unavoidable in terminal workplace installations.
In BASIC 25,000h.

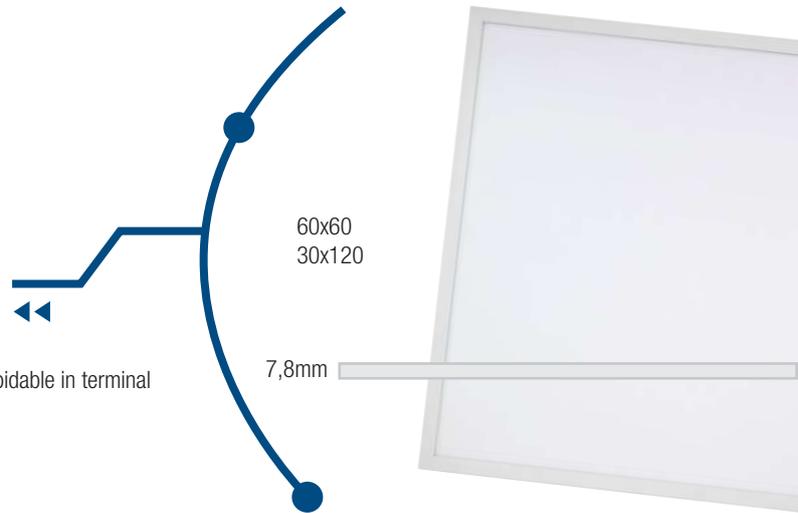


Backlight

BASIC SLIMFLUX BL + UGR

PRO SLIMFLUX BL + UGR


Backlit panels, Backlight: the illumination is direct, and the panel has a back shell several cm thick, acts as a heat sink and must be considered in the recessed space.
Wide range in UGR, UGR without driver and standard non-UGR versions.

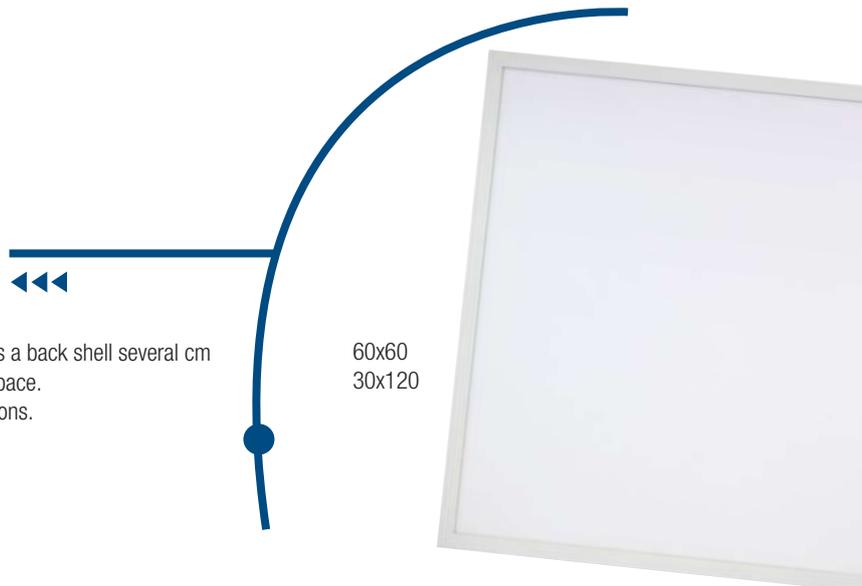

Stock Optimisation

PRO SLIMFLUX BL UGR CCT

Top of the range panels for the most versatile version there is: colour temperature selector to reduce stock.
Models with different wattages and Ra80 and Ra90 versions.

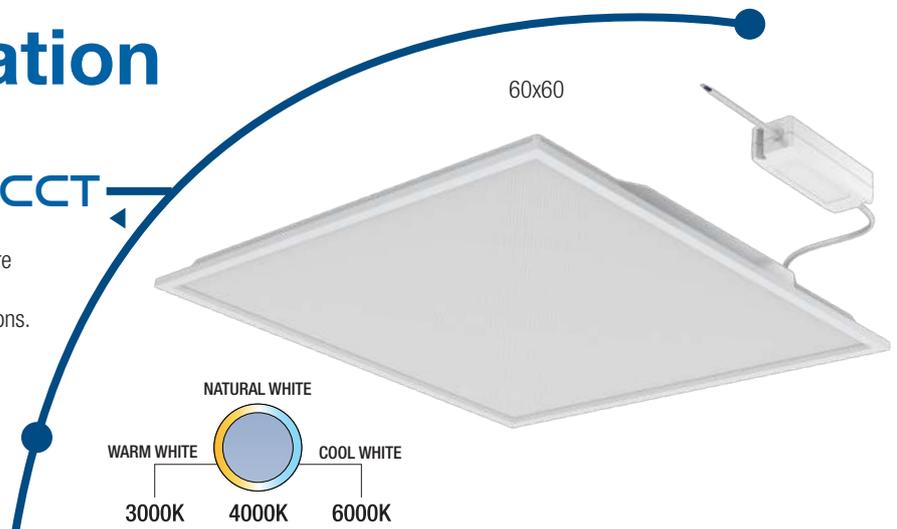

Tecnology & Quality

Specialist

PRO SLIMFLUX BL IP65
High IP for this panel dedicated to outdoor or high humidity areas.

PRO SLIMFLUX BL SENSOR
Motion sensor, also manageable with a remote control.

PLUS SLIMFLUX BL PLAFO + UGR
For mounting on ceilings that do not allow recessed installation, the 4 cm integrated frame panel solves the problem and conceals the driver.



Led Panels

PLUS SLIMFLUX ROUND

PLUS SLIMFLUX TRANSLUCENT UP&DOWN

Decorative panels: the Tondo for surface mounting offers an excellent visual impact, modern and effective, with the same output as a standard square panel. Both round and rectangular pendant panels, with their transparency, enhance the ambience by creating an incomparable effect of lightness.




Visit the site duralamp.com to stay updated on all the news and on the evolution of our products!



Led PANELS

SIDELIGHT PANELS:

EXTREMELY THIN - LIGHT IS DIFFUSED FROM THE SIDE OF THE FRAME TO THE PANEL

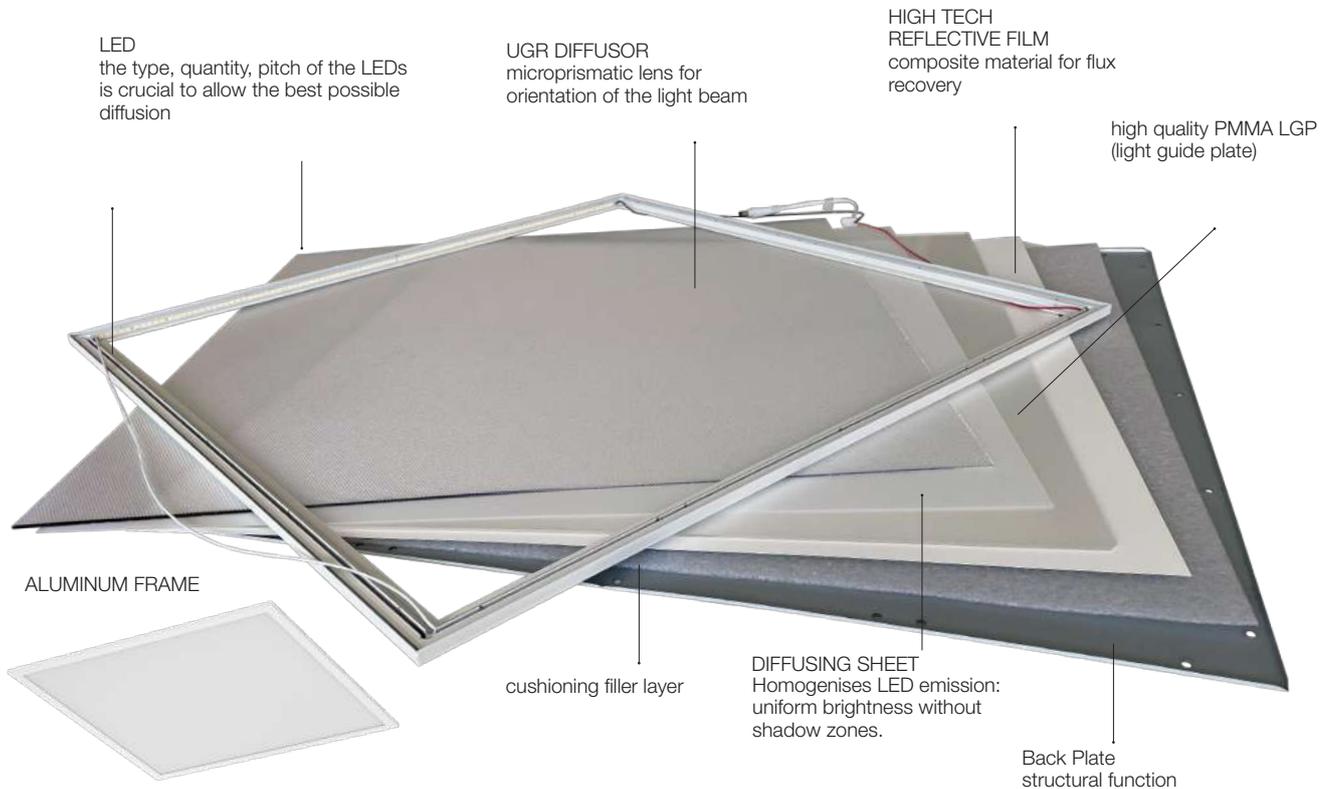

BACKLIGHT PANELS:

DIRECT LIGHT - BEST EFFICIENCY



Tecnology & Quality


SIDELIGHT PANELS SL: SIDELIGHT

Side Light technology is widely used in the production of LED panels. The light emission comes from the profiles embedded in the frame and is reflected uniformly on the surface of the front screen. The advantage is a very light panel with a thickness of just a few millimetres.

SLIMFLUX SL



SLIMFLUX BL




BACKLIGHT PANELS BL: DIRECT LIGHTING

The positioning of the LEDs on a horizontal plate parallel to the screen guarantees uniformity of illumination and excellent efficiency. The rear compartment, a few centimetres thick, is functional to housing the backlighting and optimising heat dissipation.



Led Panels

LOOKING FOR A LED PANEL?

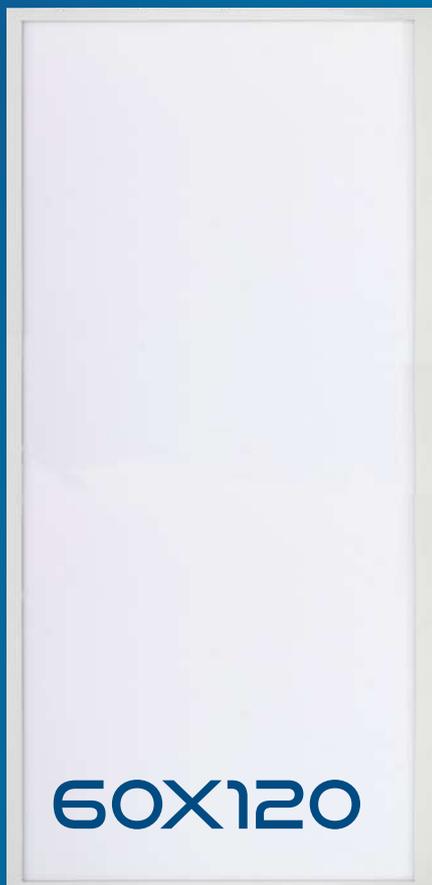

25000H
G2



35000H
G3



50000H
G4H24



DOWNLOAD PHOTOMETRIES
WWW.DURALAMP.COM

REAL LUMENS

Luminous Flux Data is REAL. Values are measured on actual use conditions.
Nominal values of the LED source are not stated.

Led Panels

| | art. | W | BL/SL | lm | Kelvin | UGR | Ra | IP |
|------------|--|----|-------|-------|-----------|-----|----|------|
| | BASIC LP6060B3-840 | 30 | BL | 3600 | 4000K | | 80 | IP20 |
| | BASIC LP6060B3-830ST | 40 | BL | 3600 | 3000K | | 80 | IP20 |
| | BASIC LP6060B3-840ST | 40 | BL | 4000 | 4000K | | 80 | IP20 |
| | BASIC LP6060B3-860ST | 40 | BL | 4000 | 6000K | | 80 | IP20 |
| | BASIC LP6060B3UGR-840ST | 40 | BL | 4000 | 4000K | • | 80 | IP20 |
| New | BASIC LP6060B4UGR-840ST | 40 | BL | 4000 | 4000K | • | 80 | IP20 |
| | BASIC LP6060S3-840 | 30 | SL | 3600 | 4000K | | 80 | IP20 |
| | BASIC LP6060S3UGR-840 | 30 | SL | 3600 | 4000K | • | 80 | IP20 |
| | PLUS LP6060P1-840 <input type="checkbox"/> | 40 | BL | 4000 | 4000K | | 80 | IP20 |
| | PLUS LP6060P2-840 <input type="checkbox"/> | 60 | BL | 6000 | 4000K | | 80 | IP20 |
| | PLUS LP6060P2-860 <input type="checkbox"/> | 60 | BL | 6000 | 6000K | | 80 | IP20 |
| | PLUS LP6060P1UGR-840 <input type="checkbox"/> | 40 | BL | 4000 | 4000K | • | 80 | IP20 |
| | PRO LP6060B1UGRS-940 *** | 36 | BL | 4000 | 4000K | • | 90 | IP20 |
| | PRO LP6060B1-840 | 40 | BL | 4000 | 4000K | | 80 | IP20 |
| | PRO LP6060B1UGR-840 | 28 | BL | 4000 | 4000K | • | 80 | IP20 |
| | PRO LP6060B1UGR-840Z1 (x) | 28 | BL | 3600 | 4000K | • | 80 | IP20 |
| | PRO LP6060B1UGR-930 | 30 | BL | 4000 | 3000K | • | 90 | IP20 |
| | PRO LP6060B1UGR-940 | 30 | BL | 4000 | 4000K | • | 90 | IP20 |
| | PRO LP6060B1UGR-8CCT | 40 | BL | 4500* | 3/4/6000K | • | 80 | IP20 |
| | PRO LP6060B1UGR-9CCT | 40 | BL | 4000* | 3/4/6000K | • | 90 | IP20 |
| | PRO LP6060B1NEX | 40 | BL | 4000 | 4000K | | 80 | IP65 |
| | PRO LP6262UGR-840 | 33 | SL | 4350 | 4000K | • | 80 | IP20 |
| | BASIC LP30120S3-840 | 30 | SL | 3600 | 4000K | | 80 | IP20 |
| New | BASIC LP30120B4UGR-840ST | 40 | BL | 4000 | 4000K | • | 80 | IP20 |
| | PLUS LP30120P1-840 <input type="checkbox"/> | 40 | BL | 4000 | 4000K | | 80 | IP20 |
| | PRO LP30120B1UGR-840 | 28 | BL | 4000 | 4000K | • | 80 | IP20 |
| | PLUS LP60120P1-840 <input type="checkbox"/> | 60 | BL | 6000 | 4000 | | 80 | IP20 |

60X60

62X62

30X120

60X120

* Lumen and power data are referred to 4000K colour temperature.

*** With sensor

(x) Without driver



Version with integrated frame for surface mounting.

LED panels

SLIMFLUX SL + UGR - BASIC

**FLICKER
FREE** 

Providing greater visual comfort,
improved definition of detail and
reduction of stress.

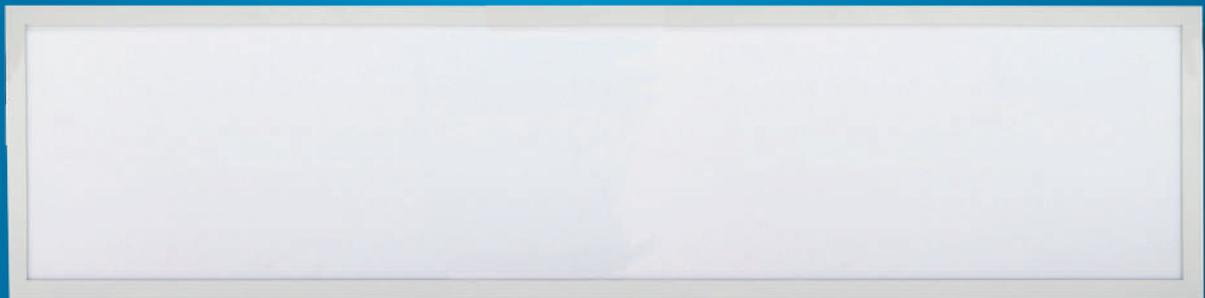

**MONOBLOCK SURFACE
MOUNTING FRAMES**
THICKNESS 6 CM



SURFACE MOUNTING FRAMES
KIT TO BE ASSEMBLED
THICKNESS 5CM - 7CM - 8CM



**RECESSED
MOUNTING FRAMES**
KIT TO BE ASSEMBLED



**FRAME FOR RECESS
POSITIONING OF PANELS**



**ANTI-FALL SAFETY WIRE AND
TERMINAL BLOCK**



**ADJUSTABLE
SUSPENSION KIT**



**METAL SPRINGS KIT FOR
RECESSED INSTALLATION
(NO BACKLIGHT)**



**ON/OFF, MULTICURRENT
DIMMABLE DALI AND
1-10V DRIVERS, STANDBY
EMERGENCY**

ACCESSORIES: See accessories from page 32.

LED panels

SLIMFLUX SL + UGR - BASIC

TPOLOGY

Ultra-flat LED fixtures with lateral lighting.

FEATURES

- Side heat dissipation.
- Immediate switch-on.
- Colour rendering: Ra>80.
- Remote power supply included.
- Do not use with dimmer.
- UGR version also available.
- Class II fittings.

INSTALLATION

Possibilities include: recessed, suspended, ceiling/wall.
SL (Sidelight) panels can use all frames in our range for surface mounting: see accessories table.

MATERIAL

Painted white aluminium body; anti-yellowing PS screen.

USAGE INFORMATION


SLIMFLUX 60x60 panels can be used with multi-current dimming power supply, code DELT40D-M.

EMERGENCY

SLIMFLUX panels can be used with standby emergency kit, code KTEMRO3.

NOTES

Providing greater visual comfort, improved definition of detail and reduction of stress.

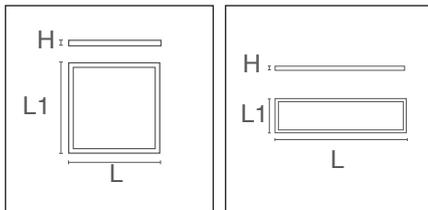

| | | | | | | | | | |
|--------------|-------------|--------|---|----------------|-----------------|-------------|--------------|---|---|
| BASIC | 220-240 Vac | Ra >80 |  | 25000 h L70B20 | IP20 VI IP43 VO | -20°C +45°C | Risk Group 0 |  |  |
|--------------|-------------|--------|---|----------------|-----------------|-------------|--------------|---|---|

SLIMFLUX SL - BASIC

| W | Im | K | Ra | PF | L | L1 | H |  |  | ART. |
|----|------|------|-----|------|------|-----|-----|---|---|---------------|
| 30 | 3600 | 4000 | >80 | >0,9 | 595 | 595 | 7.8 | 1970 | 5 / 5 | LP6060S3-840 |
| 30 | 3600 | 4000 | >80 | >0,9 | 1195 | 295 | 7.8 | 2240 | 5 / 5 | LP30120S3-840 |

| | | | | | | | | | | |
|--------------|-------------|--------|---|----------------|-----------------|-------------|--------------|---------|---|---|
| BASIC | 220-240 Vac | Ra >80 |  | 25000 h L70B20 | IP20 VI IP43 VO | -20°C +45°C | Risk Group 0 | UGR <19 |  |  |
|--------------|-------------|--------|---|----------------|-----------------|-------------|--------------|---------|---|---|

SLIMFLUX SL UGR - BASIC


| W | Im | K | Ra | PF | L | L1 | H |  |  | ART. |
|----|------|------|-----|------|-----|-----|-----|---|---|-----------------|
| 30 | 3600 | 4000 | >80 | >0,9 | 595 | 595 | 7.8 | 2200 | 5 / 5 | LP6060S3UGR-840 |

LED panels

SLIMFLUX BL + UGR - BASIC

**FLICKER
FREE** 

Providing greater visual comfort,
improved definition of detail and
reduction of stress.

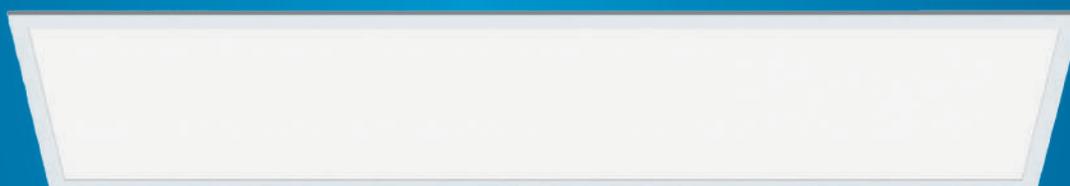

**MONOBLOCK SURFACE
MOUNTING FRAMES**
THICKNESS 6 CM



SURFACE MOUNTING FRAMES
KIT TO BE ASSEMBLED
THICKNESS 5CM - 7CM - 8CM



**RECESSED
MOUNTING FRAMES**
KIT TO BE ASSEMBLED



**FRAME FOR RECESS
POSITIONING OF PANELS**



**ANTI-FALL SAFETY WIRE AND
TERMINAL BLOCK**



**ADJUSTABLE
SUSPENSION KIT**



**METAL SPRINGS KIT FOR
RECESSED INSTALLATION
(NO BACKLIGHT)**



**ON/OFF, MULTICURRENT
DIMMABLE DALI AND
1-10V DRIVERS, STANDBY
EMERGENCY**

ACCESSORIES: See accessories from page 32.

LED panels

SLIMFLUX BL + UGR - BASIC

TPOLOGY

Direct lighting LED panel.

FEATURES

The backlit panel is composed of a metal material back compartment providing a heat sink function. Colour rendering: Ra>80. Do not use with dimmer.

Panel code LP6060B3-840 is in Insulation Class I : it cannot therefore be made dimmable by changing the driver nor can it be used with the ballast for stand-by lighting.

INSTALLATION

Consider more depth for recessed installations.

Surface mounting: select the recommended frame from the accessories table.

MATERIAL

B3: Painted white aluminium body; high-transmittance PMMA primary optics.

B4: White painted metal body. Micro-prismatic anti-glare screen.

USAGE INFORMATION

Class II SLIMFLUX panels can be used with multi-current dimming power supply, code DELT40D-M.

EMERGENCY

Class II SLIMFLUX panels can be used with standby emergency kit, code KTEMR03.


PACKAGING

B3: 6-pack with 2-piece packaging.

B4: 6-pack with individual packaging with protective bag.

NOTES

Providing greater visual comfort, improved definition of detail and reduction of stress.

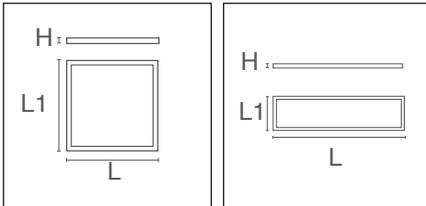

| | | | | | | | | | | |
|--------------|-------------|--------|--|----------------|-----------------|-------------|--------------|--|--|--|
| BASIC | 220-240 Vac | Ra >80 | | 25000 h L70B20 | IP20 VI IP43 VO | -20°C +45°C | Risk Group 0 | | | |
|--------------|-------------|--------|--|----------------|-----------------|-------------|--------------|--|--|--|

SLIMFLUX BL - BASIC

| W | lm | K | Ra | PF | L | L1 | H | | | ART. |
|----|------|------|-----|------|-----|-----|----|------|-------|------------------|
| 30 | 3400 | 4000 | >80 | >0,9 | 595 | 595 | 25 | 1480 | 8 / 8 | LP6060B3-840 * ▼ |
| 40 | 3600 | 3000 | >80 | >0,9 | 595 | 595 | 25 | 1480 | 6 / 6 | LP6060B3-830ST ▼ |
| 40 | 4000 | 4000 | >80 | >0,9 | 595 | 595 | 25 | 1480 | 6 / 6 | LP6060B3-840ST ▼ |
| 40 | 4000 | 6000 | >80 | >0,9 | 595 | 595 | 25 | 1480 | 6 / 6 | LP6060B3-860ST ▼ |

▼ To be discontinued.

| | | | | | | | | | | |
|--------------|-------------|--------|--|----------------|-----------------|-------------|--------------|---------|--|--|
| BASIC | 220-240 Vac | Ra >80 | | 25000 h L70B20 | IP20 VI IP43 VO | -20°C +45°C | Risk Group 0 | UGR <19 | | |
|--------------|-------------|--------|--|----------------|-----------------|-------------|--------------|---------|--|--|

SLIMFLUX BL UGR - BASIC

| W | lm | K | Ra | UGR | PF | L | L1 | H | | | ART. | |
|-----|------|------|------|-----|------|------|-----|------|------|-------|---------------------|--------------------|
| 40 | 4000 | 4000 | >80 | <19 | >0,9 | 595 | 595 | 25 | 1480 | 6 / 6 | LP6060B3UGR-840ST ▼ | |
| New | 40 | 4000 | 4000 | >80 | <19 | >0,9 | 595 | 595 | 34 | 1120 | 6 / 6 | LP6060B4UGR-840ST |
| New | 40 | 4000 | 4000 | >80 | <19 | >0,9 | 295 | 1195 | 34 | 1970 | 6 / 6 | LP30120B4UGR-840ST |


▼ To be discontinued.

LED panels

SLIMFLUX BL + UGR - PRO

**FLICKER
FREE** 

Providing greater visual comfort,
improved definition of detail and
reduction of stress.

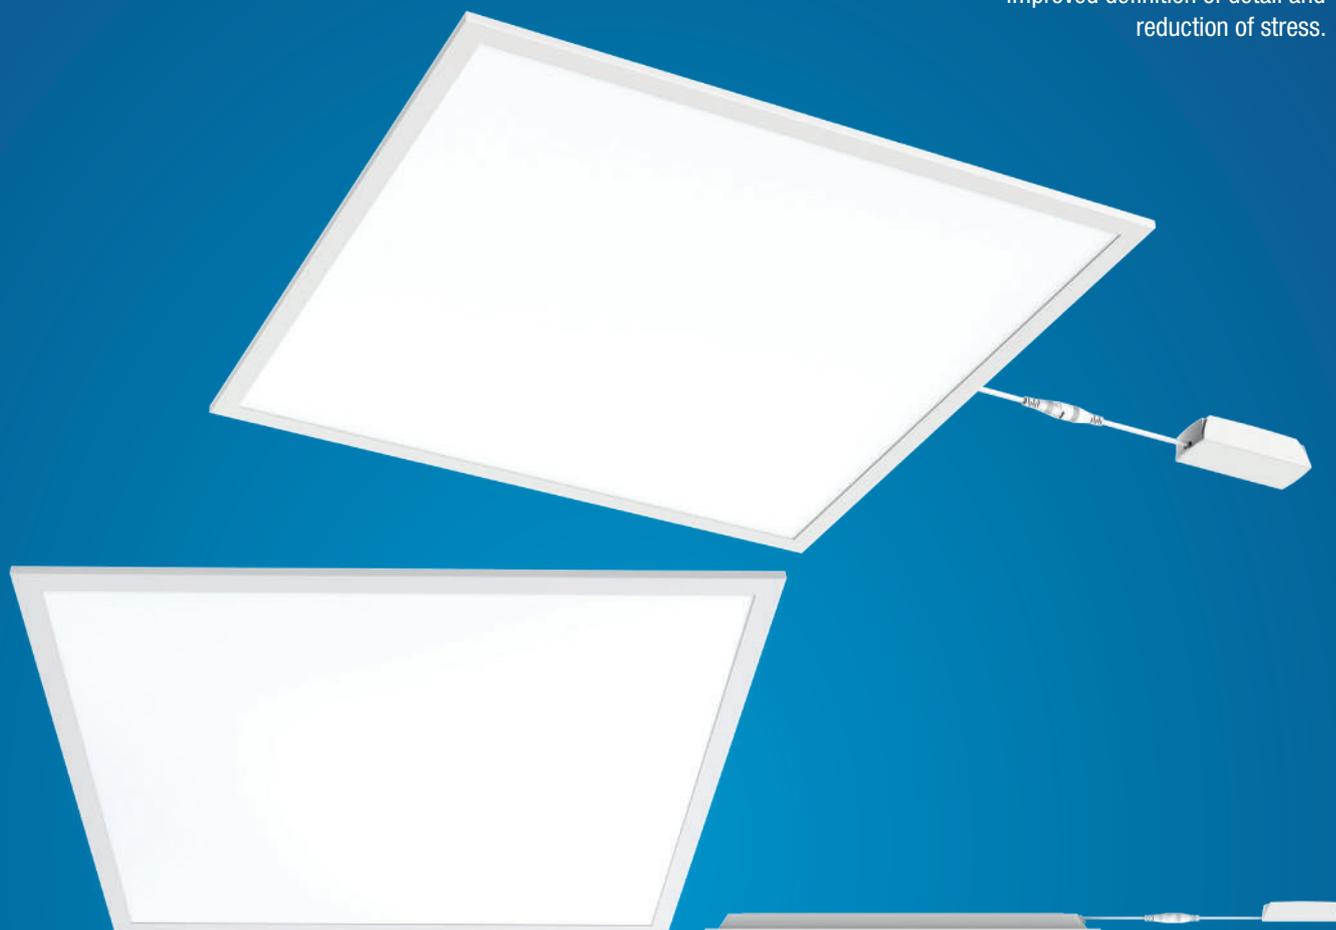

**MONOBLOCK SURFACE
MOUNTING FRAMES**
THICKNESS 6 CM



SURFACE MOUNTING FRAMES
KIT TO BE ASSEMBLED
THICKNESS 5CM - 7CM - 8CM



**RECESSED
MOUNTING FRAMES**
KIT TO BE ASSEMBLED



**FRAME FOR RECESS
POSITIONING OF PANELS**



**ANTI-FALL SAFETY WIRE AND
TERMINAL BLOCK**



**ADJUSTABLE
SUSPENSION KIT**



**METAL SPRINGS KIT FOR
RECESSED INSTALLATION
(NO BACKLIGHT)**



**ON/OFF, MULTICURRENT
DIMMABLE DALI AND
1-10V DRIVERS, STANDBY
EMERGENCY**

ACCESSORIES: See accessories from page 32.

LED panels

SLIMFLUX BL + UGR - PRO

TPOLOGY

Direct lighting LED panel.

FEATURES

Equipped with special PMMA primary lenses, the LED sources positioned on a horizontal plate ensure lighting uniformity on the diffuser surface and ensure excellent efficiency levels. The backlit panel is composed of a metal material back compartment providing a heat sink function. Colour rendering: Ra>80 or Ra>90.

INSTALLATION


Consider more depth for recessed installations. Surface mounting: select the recommended frame from the accessories table.

MATERIAL

Painted white aluminium body; high-transmittance PMMA primary optics.

PACKAGING

6 pieces pack with single items' box.

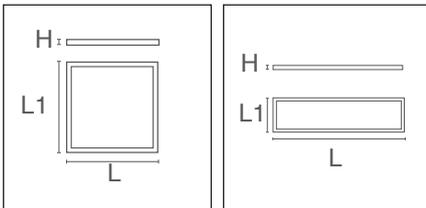

| | | | | | | | | | |
|------------|-------------|--------|---|----------------|-----------------|-------------|--------------|---|---|
| PRO | 220-240 Vac | Ra >80 |  | 50000 h L80B20 | IP20 VI IP43 VO | -25°C +40°C | Risk Group 0 |  |  |
|------------|-------------|--------|---|----------------|-----------------|-------------|--------------|---|---|

SLIMFLUX BL - PRO

| W | lm | K | Ra | PF | L | L1 | H |  |  | ART. |
|----|------|------|-----|-----|-----|-----|----|---|---|--------------|
| 40 | 4000 | 4000 | >80 | 0,9 | 595 | 595 | 30 | 2200 | 1 / 6 | LP6060B1-840 |

| | | | | | | | | | | |
|------------|-------------|--------|---|----------------|-----------------|-------------|--------------|---------|---|---|
| PRO | 220-240 Vac | Ra >80 |  | 50000 h L80B20 | IP20 VI IP43 VO | -20°C +45°C | Risk Group 0 | UGR <19 |  |  |
|------------|-------------|--------|---|----------------|-----------------|-------------|--------------|---------|---|---|

SLIMFLUX BL UGR - PRO

| W | lm | K | Ra | UGR | PF | L | L1 | H |  |  | ART. |
|------|------|------|-----|-----|-----|------|-----|----|---|---|---------------------|
| 28 | 4000 | 4000 | >80 | <19 | 0,9 | 595 | 595 | 30 | 2150 | 1 / 6 | LP6060B1UGR-840 |
| → 30 | 4000 | 3000 | >90 | <19 | 0,9 | 595 | 595 | 30 | 2200 | 1 / 6 | LP6060B1UGR-930 |
| → 30 | 4000 | 4000 | >90 | <19 | 0,9 | 595 | 595 | 30 | 2200 | 1 / 6 | LP6060B1UGR-940 |
| 45 | 5500 | 4000 | >80 | <19 | 0,9 | 595 | 595 | 30 | 2070 | 1 / 6 | LP6060B1UGR-840HP ▼ |
| 28 | 4000 | 4000 | >80 | <19 | 0,9 | 1195 | 295 | 30 | 1780 | 1 / 6 | LP30120B1UGR-840 |


▼ To be discontinued.

LED panels

SLIMFLUX BL UGR CCT - PRO

**FLICKER
FREE** 

Providing greater visual comfort,
improved definition of detail and
reduction of stress.



**RECESSED
MOUNTING FRAMES
KIT TO BE ASSEMBLED**



**FRAME FOR RECESS
POSITIONING OF PANELS**



**ANTI-FALL SAFETY WIRE AND
TERMINAL BLOCK**



**ADJUSTABLE
SUSPENSION KIT**



**METAL SPRINGS KIT FOR
RECESSED INSTALLATION
(NO BACKLIGHT)**



**ON/OFF, MULTICURRENT
DIMMABLE DALI AND
1-10V DRIVERS, STANDBY
EMERGENCY**

ACCESSORIES: See accessories from page 32.

LED panels

SLIMFLUX BL UGR CCT - PRO

TPOLOGY

LED panel for direct lighting.
Luminaire with the possibility of selecting the colour temperature at the time of installation.

FEATURES

Remote power supply equipped with a dip-switch to select the colour temperature.
The backlit panel is composed of a metal material back compartment providing a heat sink function.
The LED sources positioned on a horizontal plate ensure lighting uniformity on the diffuser surface and ensure excellent efficiency levels.

Colour rendering: Ra>80, Ra>90.

INSTALLATION

Consider more depth for recessed installations.
Surface mounting: select the recommended frame from the accessories table.

MATERIAL


Painted white aluminium body.
Micro diffusive PMMA lens.

PACKAGING

4 pieces pack with single items' protection plastic bag.

NOTES

Providing greater visual comfort, improved definition of detail and reduction of stress.
The lumen and power data indicated refers to the 4000K colour temperature.



| | | | | | | | | | |
|------------|-------------|--|----------------|-----------------|-------------|--------------|---------|--|--|
| PRO | 220-240 Vac | | 50000 h L80B20 | IP20 VI IP43 VO | -25°C +40°C | Risk Group 0 | UGR <19 | | |
|------------|-------------|--|----------------|-----------------|-------------|--------------|---------|--|--|

| W | lm | K | Ra | UGR | PF | L | L1 | H | | | ART. |
|----|------|----------------|-----|-----|------|-----|-----|----|------|-------|-------------------------|
| 40 | 4500 | 3000-4000-6000 | >80 | <19 | 0,95 | 595 | 595 | 40 | 2230 | 4 / 4 | LP6060B1UGR-8CCT |
| 40 | 4000 | 3000-4000-6000 | >90 | <19 | 0,95 | 595 | 595 | 40 | 2230 | 4 / 4 | LP6060B1UGR-9CCT |

The 30 x 120 and 60 x 120 formats will be available in a future re-assortment.

LED panels

SLIMFLUX BL IP65 - PRO

**FLICKER
FREE** 

Providing greater visual comfort,
improved definition of detail and
reduction of stress.



**MONOBLOCK SURFACE
MOUNTING FRAMES**
THICKNESS 6 CM



SURFACE MOUNTING FRAMES
KIT TO BE ASSEMBLED
THICKNESS 5CM - 7CM - 8CM



**RECESSED
MOUNTING FRAMES**
KIT TO BE ASSEMBLED



**FRAME FOR RECESS
POSITIONING OF PANELS**



**ANTI-FALL SAFETY WIRE AND
TERMINAL BLOCK**



**ADJUSTABLE
SUSPENSION KIT**



**METAL SPRINGS KIT FOR
RECESSED INSTALLATION
(NO BACKLIGHT)**



**ON/OFF, MULTICURRENT
DIMMABLE DALI AND
1-10V DRIVERS, STANDBY
EMERGENCY**

ACCESSORIES: See accessories from page 32.

LED panels

SLIMFLUX BL IP65 - PRO

TPOLOGY

LED panel with IP65 protection degree.
Direct lighting panel with rear dissipation shell.

FEATURES

Panel equipped with a resin coated power supply providing an IP65 connection to both the panel and exposed wiring: may be used in installations that are exposed to particularly difficult environmental conditions without the need for precautions to protect the driver. Equipped with a GORE-TEX® valve to compensate for pressure variations due to thermal changes and to prevent the formation of condensation in the fixture.

INSTALLATION

Consider more depth for recessed installations.
Surface mounting: select the recommended frame from the accessories table.

MATERIAL

Painted white aluminium body; PMMA screen.

APPLICATIONS


Panel suitable for outdoor installations and in places such as bathrooms, kitchens, plant areas etc.

PACKAGING

6 pieces pack with single items' box.

NOTES

Providing greater visual comfort, improved definition of detail and reduction of stress.



| | | | | | | | | | | |
|------------|-------------|----------|---|----------------|----------|-------------|--------------|--|---|---|
| PRO | 220-240 Vac | Ra >80 |  | 50000 h L70B20 | IP65 | -25°C +40°C | Risk Group 0 |  120° |  |  |
| W | Im | K | Ra | PF | L | L1 | H |  |  | ART. |
| 40 | 4000 | 4000 | >80 | 0,95 | 595 | 595 | 36 | 1850 | 1 / 6 | LP6060B1NEX |

LED panels

SLIMFLUX BL SENSOR


**FLICKER
FREE** 

Providing greater visual comfort,
improved definition of detail and
reduction of stress.




REMOTE-CONTROLLED SENSOR FUNCTIONS

- 1- ON/OFF
- 2- Dimming
- 3- Motion sensor function.
- 4- ON and dimming function according to the illuminance in the room.

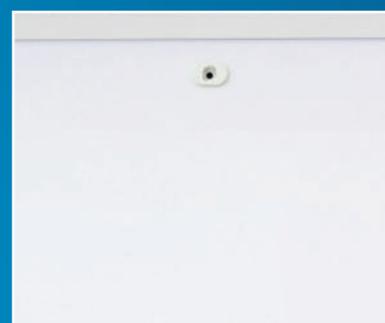

LED PANEL WITHOUT REMOVABLE SENSOR

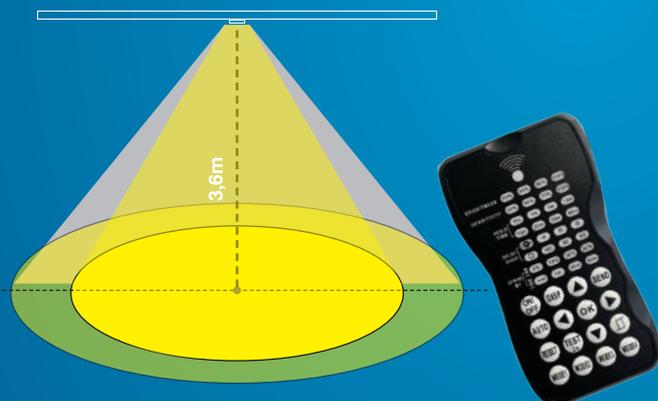

MOTION DETECTION
HIGH-SENSITIVITY AREA

REMOTE CONTROL
RANGE UP TO 15M

PLUG-IN SENSOR

SENSOR DETAILS



REAL LUMENS

Luminous Flux Data is REAL. Values are measured on actual use conditions.
Nominal values of the LED source are not stated.

LED panels

SLIMFLUX BL SENSOR

TPOLOGY

Direct-light LED panel, equipped with sensor remote-controlled. Via the remote control it is possible to switch the luminaire on and off, dim and select the lighting mode with motion detection or room brightness detection.

FEATURES

The backlit panel is composed of a metal material back compartment providing a heat sink function. The sensor can be removed; replacement sensor available as a separate part number (KTLP-SR). Without sensor, the panel operates On/Off. Colour rendering: Ra>90.

INSTALLATION


Consider more depth for recessed installations. Surface mounting: select the recommended frame from the accessories table.

MATERIAL

Painted white aluminium body; anti-yellowing PS screen.

NOTES

Providing greater visual comfort, improved definition of detail and reduction of stress.



| | | | | | | | | | | |
|------------|-------------|--------|---|----------------|-----------------|-------------|--------------|---------|---|---|
| PRO | 220-240 Vac | Ra >90 |  | 50000 h L70B20 | IP20 VI IP40 VO | -25°C +40°C | Risk Group 0 | UGR <19 |  |  |
|------------|-------------|--------|---|----------------|-----------------|-------------|--------------|---------|---|---|

SLIMFLUX BL - SENSOR

| | | | | | | | | | | |
|----------|-----------|----------|-----------|-----------|----------|-----------|----------|---|---|-------------------------|
| W | Im | K | Ra | PF | L | L1 | H |  |  | ART. |
| 36 | 4000 | 4000 | >90 | 0,9 | 595 | 595 | 32 | 3000 | 6 / 6 | LP6060B1UGRS-940 |

REMOTE CONTROL FOR SENSOR PANEL



| | | | |
|------------|---------------------------------|---|----------------|
| New | Remote control for sensor panel |  | ART. |
| | | 1 / 1 | KTLP-TC |

SPARE SENSOR




| | | | | | |
|------------|--------------|-----------|----------|---|----------------|
| New | Panel sensor | L1 | H |  | ART. |
| | | 20.5 | 14.9 | 1 / 1 | KTLP-SR |

The same sensor device is included into the single panels' box.

SLIMFLUX UGR DRIVER NOT INCLUDED **FLICKER FREE**

Providing greater visual comfort, improved definition of detail and reduction of stress.

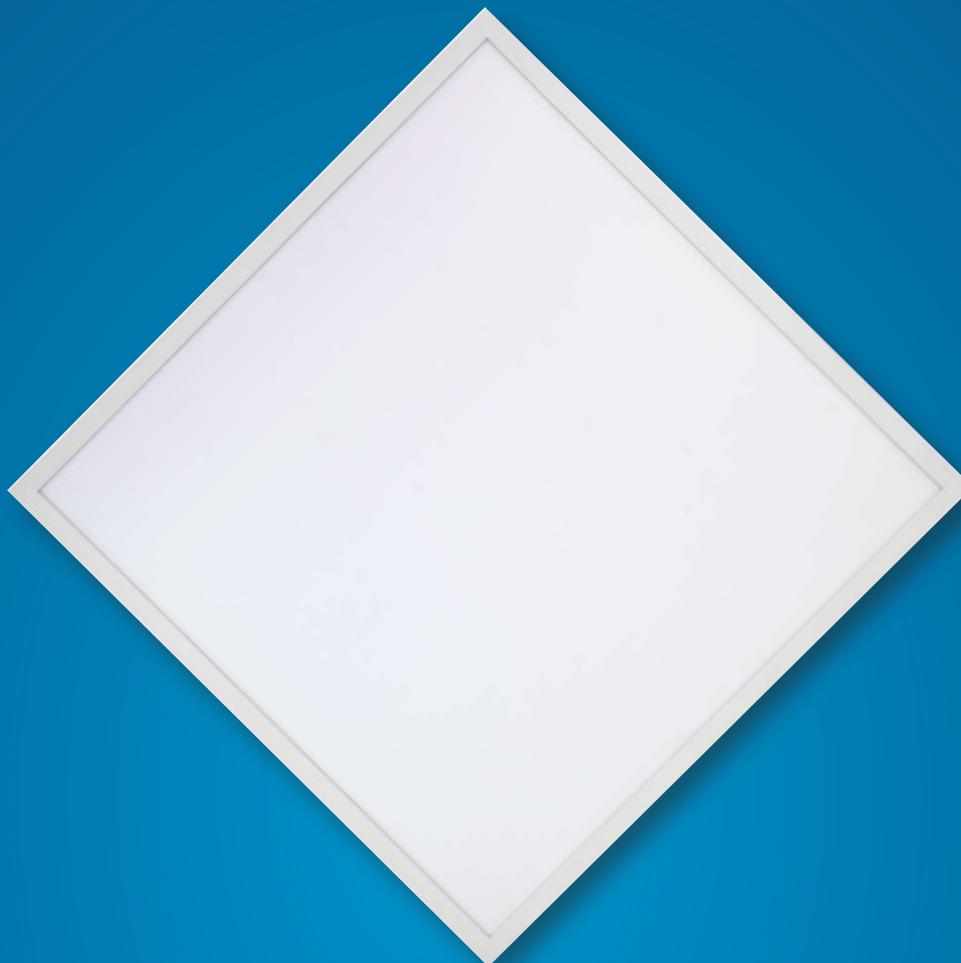

MONOBLOCK SURFACE MOUNTING FRAMES
THICKNESS 6 CM



SURFACE MOUNTING FRAMES KIT TO BE ASSEMBLED
THICKNESS 5CM - 7CM - 8CM



RECESSED MOUNTING FRAMES KIT TO BE ASSEMBLED



FRAME FOR RECESS POSITIONING OF PANELS



ANTI-FALL SAFETY WIRE AND TERMINAL BLOCK



ADJUSTABLE SUSPENSION KIT



METAL SPRINGS KIT FOR RECESSED INSTALLATION (NO BACKLIGHT)



ON/OFF, MULTICURRENT DIMMABLE DALI AND 1-10V DRIVERS, STANDBY EMERGENCY

ACCESSORIES: See accessories from page 32.

SLIMFLUX UGR DRIVER NOT INCLUDED - PRO

TPOLOGY

LED panels supplied without drivers.

FEATURES

SL model: ultra-flat LED luminaires for direct lighting.

Side heat dissipation.

BL model: the backlit panel is composed of a metal material back compartment providing a heat sink function.

Colour rendering: Ra>80.”

INSTALLATION

Consider more depth for recessed installations.

Surface mounting: select the recommended frame from the accessories table.

Surface mounting & adjustable suspension wire kits are available as accessories.

MATERIAL

Painted white aluminium body; high-transmittance PMMA primary optics.

USAGE INFORMATION

SLIMFLUX panels can be used with standby emergency kit, code KTEMRO3.

POWER SUPPLY

Do not use with dimmer.

These panels can be made dimmable using the DELT40D-M dimmable power supply.


PACKAGING

SL model: 5 pieces pack with single items' box.

BL model: 6 pieces pack with single items' box.

NOTES

Panels of this range are supplied WITHOUT driver: please select the required driver from the range.



| | | | | | | | | | | |
|------------|-------------|--------|---|----------------|-----------------|-------------|--------------|---------|---|---|
| PRO | 220-240 Vac | Ra >80 |  | 50000 h L80B20 | IP20 VI IP43 VO | -25°C +40°C | Risk Group 0 | UGR <19 |  |  |
|------------|-------------|--------|---|----------------|-----------------|-------------|--------------|---------|---|---|

SLIMFLUX SL UGR - PRO - DRIVER NOT INCLUDED

| | | | | | | | | | | |
|----------|-----------|----------|-----------|-----------|----------|-----------|----------|---|---|----------------------|
| W | lm | K | Ra | PF | L | L1 | H |  |  | ART. |
| 33 | 4350 | 4000 | >80 | >0,95 | 615 | 615 | 9 | 2400 | 5 / 5 | LP6262UGR-840 |

| | | | | | | | | | | |
|------------|-------------|--------|---|----------------|-----------------|-------------|--------------|---------|---|---|
| PRO | 220-240 Vac | Ra >80 |  | 50000 h L80B20 | IP20 VI IP43 VO | -20°C +45°C | Risk Group 0 | UGR <19 |  |  |
|------------|-------------|--------|---|----------------|-----------------|-------------|--------------|---------|---|---|

SLIMFLUX BL UGR - PRO - DRIVER NOT INCLUDED

| | | | | | | | | | | |
|----------|-----------|----------|-----------|------------|----------|-----------|----------|---|---|--------------------------|
| W | lm | K | Ra | UGR | L | L1 | H |  |  | ART. |
| 28 | 3600 | 4000 | >80 | <19 | 595 | 595 | 35 | 2150 | 1 / 6 | LP6060B1UGR-840Z1 |

LED panels

SLIMFLUX BL PLAFO + UGR - PLUS

**FLICKER
FREE** 

Providing greater visual comfort,
improved definition of detail and
reduction of stress.



Speed of installation compared to
using a separate panel and frame.

40 mm
BUILT-IN FRAME



Download photometries
www.duralamp.com

REAL LUMENS

Luminous Flux Data is REAL. Values are measured on actual use conditions.
Nominal values of the LED source are not stated.

LED panels

SLIMFLUX BL PLAFO + UGR - PLUS

TPOLOGY

Backlit panel with integrated 4 cm thick frame for surface installation.

Also available in a UGR version.

FEATURES

Fixtures can be also be surface mounted both vertically and horizontally.

Speed of installation compared to using a separate panel and frame.

The positioning of the LED sources on a horizontal plate ensures lighting uniformity on the screen surface and excellent efficiency levels.

If you want to dim or use the multicurrent power supply dimmer, see the relevant page of the catalogue.

Colour rendering: Ra>80.

MATERIAL


Painted white aluminium body; high-transmittance PMMA primary optics.

PACKAGING

5 pieces pack with single items' box (except 60x120, 3 pieces).

NOTES

Providing greater visual comfort, improved definition of detail and reduction of stress.

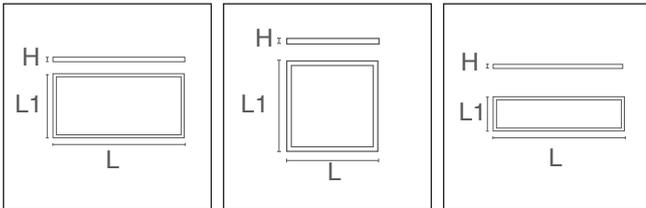

| | | | | | | | | | |
|-------------|-------------|--------|--|----------------|-----------------|-------------|--------------|--|--|
| PLUS | 220-240 Vac | Ra >80 | | 35000 h L70B20 | IP20 VI IP43 VO | -25°C +35°C | Risk Group 0 | | |
|-------------|-------------|--------|--|----------------|-----------------|-------------|--------------|--|--|

| W | lm | K | Ra | UGR | PF | L | L1 | H | | | ART. |
|----|------|------|-----|-----|------|------|-----|----|------|-------|------------------------|
| 40 | 4000 | 4000 | >80 | | 0,95 | 600 | 600 | 40 | 1850 | 1 / 5 | LP6060P1-840 ▼ |
| 60 | 6000 | 4000 | >80 | | 0,95 | 600 | 600 | 40 | 1850 | 1 / 5 | LP6060P2-840 |
| 60 | 6000 | 6000 | >80 | | 0,9 | 600 | 600 | 40 | 1850 | 1 / 5 | LP6060P2-860 |
| 40 | 4000 | 4000 | >80 | | 0,95 | 1200 | 300 | 40 | 1900 | 1 / 5 | LP30120P1-840 ▼ |
| 40 | 4000 | 4000 | >80 | <19 | 0,95 | 600 | 600 | 40 | 1850 | 1 / 5 | LP6060P1UGR-840 |
| 60 | 6000 | 4000 | >80 | | 0,95 | 1200 | 600 | 40 | 4800 | 1 / 3 | LP60120P1-840 ▼ |

▼ To be discontinued.

LED panels

SLIMFLUX ROUND - PLUS



THE POWER CABLE IS ONE WITH THE SUSPENSION CABLES, THEREFORE INVISIBLE.



LIGHT IS DIFFUSED FROM THE FINE WHITE FRAME TO THE METHACRYLATE PANEL. FRACTIONED BY MICRO INCISIONS ON THE PANEL LIGHT IS DIRECTED PREDOMINANTLY DOWNWARDS. 30% OF THE LIGHT IS PROJECTED UPWARDS TO CREATE A STRIKING EFFECT THAT ADDS TO ANY CLASSIC OR MODERN ENVIRONMENT.

30% ↑

70% ↓

NOTES:
THE ROUND TRANSLUCENT UP&DOWN PANELS ARE COMPLETE WITH SUSPENSION CABLES AND DRIVER INTEGRATED IN THE CEILING ROSE.
MAXIMUM SUSPENSION LENGTH 150 CM.

LED panels

SLIMFLUX ROUND - PLUS

TPOLOGY

Slim LED panel.

FEATURES

Light is diffused from the thin white frame to the methacrylate panel.

INSTALLATION

Possibility of installing TONDO 60: recessed or surface mounted, in which case the panel remains 35 mm away from the ceiling.

TONDO TRASLUCIDE SUSPENSION: power supply unit integrated in ceiling rose.

The power cable is one with the suspension cables, therefore invisible.

Adjustable suspension wires: MAX 150 cm.

Cable attachment with screw and steel cylinder.


MATERIAL

White painted metal body; frontal methacrylate panel.

High transmittance optical PMMA screen.

PACKAGING

5 pieces pack with single items' box.

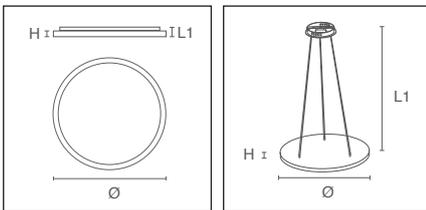

| | | | | | | | | | | |
|-------------|-------------|-------|---|----------------|------|-------------|--------------|---|------|---|
| PLUS | 220-240 Vac | Ra 80 |  | 30000 h L70B20 | IP20 | -25°C +40°C | Risk Group 0 |  | 112° |  |
|-------------|-------------|-------|---|----------------|------|-------------|--------------|---|------|---|

SLIMFLUX ROUND SURFACE MOUNTING - PLUS

| W | lm | K | PF |  | L1 | H |  |  | ART. |
|----|------|------|------|---|------|------|---|---|------------|
| 40 | 3800 | 3000 | 0.95 | 593 | 33.5 | 19.5 | 3460 | 1 / 5 | LP60T830-A |
| 40 | 4000 | 4000 | 0.95 | 593 | 33.5 | 19.5 | 2600 | 1 / 5 | LP60T840-A |

| | | | | | | | | | |
|-------------|-------------|-------|---|----------------|------|-------------|--------------|---|---|
| PLUS | 220-240 Vac | Ra 80 |  | 30000 h L70B20 | IP20 | -25°C +40°C | Risk Group 0 |  |  |
|-------------|-------------|-------|---|----------------|------|-------------|--------------|---|---|

SLIMFLUX ROUND TRANSLUCENT UP&DOWN SUSPENSION - PLUS

| W | lm | K | PF |  | L1 | H |  |  | ART. |
|----|------|------|------|---|-----|------|---|---|--------------|
| 40 | 3800 | 3000 | 0.95 | 593 | 150 | 19.5 | 2600 | 1 / 5 | LP60T830DE-A |
| 40 | 4000 | 4000 | 0.95 | 593 | 150 | 19.5 | 2600 | 1 / 5 | LP60T840DE-A |

LED panels

SLIMFLUX TRANSLUCENT UP&DOWN - PLUS

30% ↑

70% ↓

THE POWER CABLE IS ONE WITH THE SUSPENSION CABLES, THEREFORE INVISIBLE.

LIGHT IS DIFFUSED FROM THE FINE WHITE FRAME TO THE METHACRYLATE PANEL. FRACTIONED BY MICRO INCISIONS ON THE PANEL LIGHT IS DIRECTED PREDOMINANTLY DOWNWARDS. 30% OF THE LIGHT IS PROJECTED UPWARDS TO CREATE A STRIKING EFFECT THAT ADDS TO ANY CLASSIC OR MODERN ENVIRONMENT.

NOTES:
THE TRANSLUCENT UP&DOWN 30X120 PANELS ARE COMPLETE WITH SUSPENSION CABLES AND DRIVER INTEGRATED IN THE CEILING ROSE.
MAXIMUM SUSPENSION LENGTH 150 CM.

DIMMABILITY CAN BE USED WITH 0-10V DIMMERS

LED panels

SLIMFLUX TRANSLUCENT UP&DOWN - PLUS

TPOLOGY

Translucent LED panel with double emission, dimmable.

FEATURES

Fixture with visual interest characterised by dual emission - 70% downwards and 30% upwards - along with the translucency of the panel itself.

MATERIAL

White frame with methacrylate panel.
High transmittance optical PMMA screen.

USAGE INFORMATION

DIMMABILITY: can be used with 0-10V dimmers.

POWER SUPPLY


The luminaire comes complete with a remote power supply integrated into one of two white metal parallelepipeds to be fixed to the ceiling.

PACKAGING

5 pieces pack with single items' box.

NOTES

Adjustable suspension wires: MAX 150 cm.
Cable attachment with screw and steel cylinder.



| | | | | | | | | | | |
|-------------|-------------|-------|---|----------------|------|----------------|--------------|---|--|---|
| PLUS | 220-240 Vac | Ra 80 |  0-10V | 30000 h L70B20 | IP20 | -25°C +40°C | Risk Group 0 |  |  120° |  |
|-------------|-------------|-------|---|----------------|------|----------------|--------------|---|--|---|

| W | lm | K | Ra | PF | L | L1 | H |  |  | ART. |
|----|------|------|----|------|------|-----|------|---|---|------------------------|
| 40 | 3800 | 3000 | 80 | 0.95 | 1200 | 300 | 14.5 | 3500 | 1 / 5 | LP30120T830DE-A |
| 40 | 4000 | 4000 | 80 | 0.95 | 1200 | 300 | 14.5 | 3500 | 1 / 5 | LP30120T840DE-A |

Frames & Accessories for LED PANELS

| | LPLAFO60 | LPLAFO603 | LPLAFO604 | LPLAFO607 | LPLAFO60P | LPLAFO60R | LPLAFO120 | LPLAFO1203 | LPLAFO301204 | LPLAFO301207 | LPLAFO30120R | LPLAFO30120P | LPLAFO601204 | LPLAFO601207 | KTLPW1-MS | LP-SSK | FASTCON-30 | KTLP-SPU | KTLP-SR | KTLP-TC |
|--------------------|----------|-----------|-----------|-----------|-----------|-----------|-----------|------------|--------------|--------------|--------------|--------------|--------------|--------------|-----------|--------|------------|----------|---------|---------|
| LP30120B1UGR-840 | | | | | | | | | x | x | x | x | | | x | x | x | x | | |
| LP30120P1-840 | | | | | | | | | | | | | | | | x | x | | | |
| LP30120S3-840 | | | | | | | x | x | x | x | x | x | | | x | x | x | x | | |
| LP60120P1-840 | | | | | | | | | | | | | | | | x | x | | | |
| LP6060B1-840 | | | x | x | x | x | | | | | | | | | x | x | x | x | | |
| LP6060B1NEX | | | x | x | x | x | | | | | | | | | x | x | x | x | | |
| LP6060B1UGR-840 | | | x | x | x | x | | | | | | | | | x | x | x | x | | |
| LP6060B1UGR-840Z1 | | | x | x | x | x | | | | | | | | | x | x | x | x | | |
| LP6060B1UGR-8CCT | | | | | x | x | | | | | | | | | x | x | x | x | | |
| LP6060B1UGR-930 | | | x | x | x | x | | | | | | | | | x | x | x | x | | |
| LP6060B1UGR-940 | | | x | x | x | x | | | | | | | | | x | x | x | x | | |
| LP6060B1UGR-9CCT | | | | | x | x | | | | | | | | | x | x | x | x | | |
| LP6060B1UGRS-940 | | | x | x | x | x | | | | | | | | | x | x | x | x | x | x |
| LP6060B3-830ST | | | x | x | x | x | | | | | | | | | x | x | x | x | | |
| LP6060B3-840 | x | x | x | x | x | x | | | | | | | | | x | x | x | x | | |
| LP6060B3-840ST | | | x | x | x | x | | | | | | | | | x | x | x | x | | |
| LP6060B3-860ST | | | x | x | x | x | | | | | | | | | x | x | x | x | | |
| LP6060B3UGR-840ST | | | x | x | x | x | | | | | | | | | x | x | x | x | | |
| LP6060B4UGR-840ST | | | x | x | x | x | | | | | | | | | x | x | x | x | | |
| LP30120B4UGR-840ST | | | x | x | x | x | | | | | | | | | x | x | x | x | | |
| LP6060P1-840 | | | | | | | | | | | | | | | | | | | | |
| LP6060P1UGR-840 | | | | | | | | | | | | | | | | | | | | |
| LP6060P2-840 | | | | | | | | | | | | | | | | | | | | |
| LP6060P2-860 | | | | | | | | | | | | | | | | | | | | |
| LP6060S3-840 | x | x | x | x | x | x | | | | | | | | | x | x | x | x | | |
| LP6060S3UGR-840 | x | x | x | x | x | x | | | | | | | | | x | x | x | x | | |
| LP6262UGR-840 | | | | | | | | | | | | | | | | x | x | x | | |

Drivers for LED PANELS

| | A01484 | A01485 | A01486 | DELT40D-10V | DELT40D-D2 | DELT40D-M | DELT60D-D | DELT65D-M | ZKLP600EL | ZKLP700EL | KTEMPR03 | Emergency kit |
|--------------------|--------|--------|--------|-------------|------------|-----------|-----------|-----------|-----------|-----------|----------|---------------|
| LP30120B1UGR-840 | | | x | x | x | x | x | | x | | x | |
| LP30120P1-840 | | | | | | | | | | | | |
| LP30120S3-840 | | x | x | x | | x | | | | x | x | |
| LP60120P1-840 | | | | | | | | | | | | |
| LP6060B1-840 | x | | x | x | | x | | x | | | x | |
| LP6060B1NEX | | | | | | | | | | | | |
| LP6060B1UGR-840 | | | x | x | x | x | | | x | | x | |
| LP6060B1UGR-840Z1 | | x | x | x | | x | | | | x | x | |
| LP6060B1UGR-8CCT | | | | | x | | x | | | | x | |
| LP6060B1UGR-930 | | x | x | x | x | x | | x | | | x | |
| LP6060B1UGR-940 | | x | x | x | x | x | | x | | | x | |
| LP6060B1UGR-9CCT | | | | | x | | x | | | | x | |
| LP6060B1UGRS-940 | | | | | | | | | | | | |
| LP6060B3-830ST | x | | x | x | x | x | | x | | | x | |
| LP6060B3-840 | | | | | x | | | | | | | |
| LP6060B3-840ST | x | | x | x | x | x | | x | | | x | |
| LP6060B3-860ST | x | | x | x | x | x | | x | | | x | |
| LP6060B3UGR-840ST | x | | x | x | x | x | | x | | | x | |
| LP6060B4UGR-840ST | x | | x | x | x | x | | x | | | x | |
| LP30120B4UGR-840ST | x | | x | x | x | x | | x | | | x | |
| LP6060P1-840 | | | | | | | | | | | | |
| LP6060P1UGR-840 | | | | | | | | | | | | |
| LP6060P2-840 | | | | | | | | | | | | |
| LP6060P2-860 | | | | | | | | | | | | |
| LP6060S3-840 | | x | x | x | | x | | | | x | x | |
| LP6060S3UGR-840 | | x | x | x | | x | | | | x | x | |
| LP6262UGR-840 | x | x | x | x | | x | | | | | x | |

Accessories


PANEL ACCESSORIES



PLUS FRAMES FOR MOUNTING LED PANELS ON CEILINGS

| | L | L1 | H |  | ART. |
|--------------------------------------|------|-----|----|---|------------------|
| PLUS frame for 60 x 60 - h 60 panel | 603 | 603 | 60 | 1 / 1 | LPLAFO60 |
| PLUS frame for 120 x 30 - h 60 panel | 1203 | 303 | 60 | 1 / 1 | LPLAFO120 |

Frames for mounting LED panels on ceilings.
Screwless one piece painted metal.
Surface mounting installation with bracket.
Screws and plugs supplied.

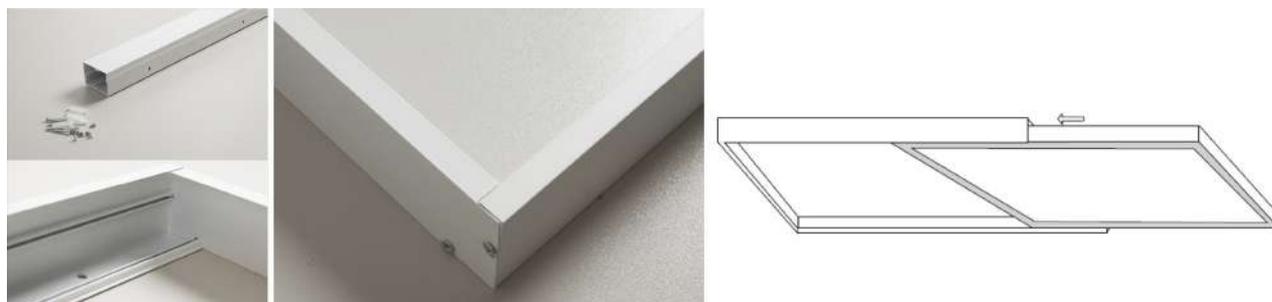

FRAMES FOR MOUNTING LED PANELS ON CEILINGS - H50



| | L | L1 | H |  | ART. |
|---------------------------------------|------|-----|----|---|--------------------|
| Basic model for 60 x 60 - h 50 panel | 600 | 605 | 50 | 1 / 40 | LPLAFO603 ▼ |
| Basic model for 120 x 30 - h 50 panel | 1200 | 300 | 50 | 1 / 20 | LPLAFO1203 |

Basic model in kit form to be assembled - h 50.
Epoxy painted extruded aluminium separated into 4 bars to be assemble while mounting. Easy and fast mounting directly on the surface.
White color.

▼ To be discontinued.

Accessories

PANEL ACCESSORIES

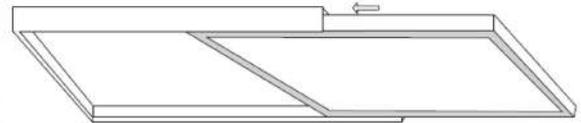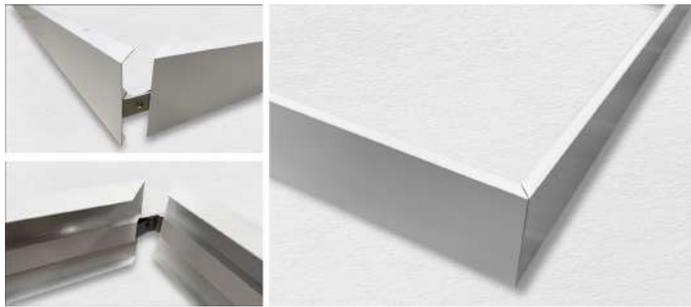


FRAMES FOR MOUNTING LED PANELS ON CEILINGS - H70

| | L | L1 | H |  | ART. |
|--|-----|------|----|---|---------------------|
| New Basic model for 60 x 60 - h 70 panel | 600 | 600 | 70 | 1 / 20 | LPLAFO607 |
| New Basic model for 30 x 120 - h 70 panel | 300 | 1200 | 70 | 1 / 20 | LPLAFO301207 |
| New Basic model for 60 x 120 - h 70 panel | 600 | 1200 | 70 | 1 / 20 | LPLAFO601207 |

Basic model in kit form to be assembled - h 70.

Epoxy painted extruded aluminium separated into 4 bars to be assemble while mounting. Easy and fast mounting directly on the surface. White color.

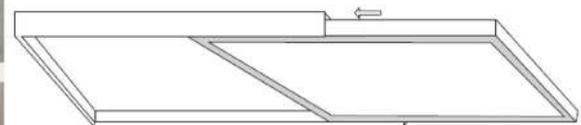

FRAMES FOR MOUNTING LED PANELS ON CEILINGS - H80


| | L | L1 | H |  | ART. |
|---------------------------------------|------|-----|----|---|---------------------|
| Basic model for 60 x 60 - h 80 panel | 598 | 598 | 80 | 1 / 25 | LPLAFO604 |
| Basic model for 30 x 120 - h 80 panel | 1198 | 298 | 80 | 1 / 20 | LPLAFO301204 |
| Basic model for 60 x 120 - h 80 panel | 1198 | 598 | 80 | 1 / 20 | LPLAFO601204 |

Basic model in kit form to be assembled - h 80.

Epoxy painted extruded aluminium separated into 4 bars to be assemble while mounting. Easy and fast mounting directly on the surface. White color.

Accessories

PANEL ACCESSORIES

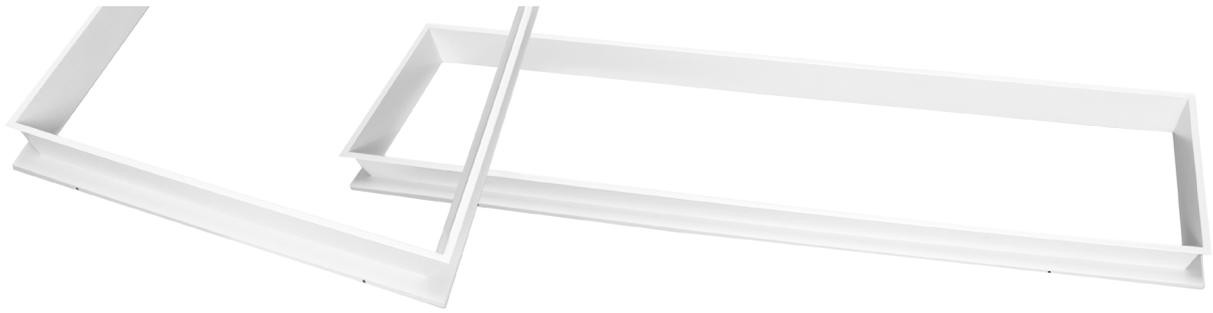

FRAME FOR RECESSED INSTALLATION

| | L | L1 | H |  | ART. |
|---|------|-----|------|---|---------------------|
| New Frame recessed installation 60 x 60 panel | 605 | 605 | 90.5 | 4 / 4 | LPLAFO60R |
| New Frame recessed installation 30 x 120 panel | 1235 | 335 | 90.5 | 4 / 4 | LPLAFO30120R |

Frame for recessed installation of LED panels in non-modular ceilings.

The panel remains recessed 8 cm into the ceiling for a softer, more pleasant illumination.

Recess depth: the panel rests on the frame, so consider 8 cm of the depth of the frame + the thickness of the panel + the necessary ventilation space

The frame consists of a one piece body ready for insertion in the ceiling.



FRAME WITH SPRINGS FOR RECESSED INSTALLATION OF LED PANELS

| | L | L1 | H |  | ART. |
|--|------|-----|----|---|---------------------|
| Frame for 60 x 60 LED panels | 630 | 630 | 30 | 1 / 20 | LPLAFO60P |
| New Frame for 30 x 120 LED panels | 1235 | 335 | 25 | 1 / 20 | LPLAFO30120P |

Frame with springs for recessed installation of LED panels in non-modular ceilings.

Set of 4 extruded aluminium profiles to be easily assembled with corner spring-brackets.

White color.

Accessories

ACCESSORIES - VARIOUS

ADJUSTABLE SUSPENSION CABLES



| | | | |
|-------------------------|---|---|---|
| |  |  |  |
| Adjustable steel cables | 2000 | 1 / 1 | KTLP-SPU |

ADJUSTABLE STEEL CABLES



| | | | |
|-------------------------|---|---|---|
| |  |  |  |
| Adjustable steel cables | 1500 | 1 / 1 | KTLP-SP ▼ |
| ▼ To be discontinued. | | | |

JUNCTION BOX FOR CONNECTION



| | | | |
|---|---|---|---|
| |  |  |  |
| Junction box | | 1 / 1 | FASTCON-30 |
| Junction box for connection to the power supply network, prepared for connection in cascade (cable length 27 cm). | | | |



| | | | |
|--|---|---|---|
| |  |  |  |
| Safety wire and terminal block | 1200 | 1 / 1 | LP-SSK |
| Junction box for connection to the mains, prepared for connection in cascade, equipped with safety suspension kit with steel cable for installations in seismic zones. | | | |

METAL SPRINGS KIT



| | | |
|---|---|---|
| |  |  |
| Metal springs kit | 1 / 1 | KTLPW1-MS |
| Metal springs kit for recessed installation - 4 pieces. | | |



| | |
|--------------------|----|
| FASTCON-30 | 35 |
| KTLP-SP | 35 |
| KTLP-SPU | 35 |
| KTLP-SR | 21 |
| KTLP-TC | 21 |
| KTLPW1-MS | 35 |
| LP-SSK | 35 |
| LP30120B1UGR-840 | 15 |
| LP30120B4UGR-840ST | 13 |
| LP30120P1-840 | 25 |
| LP30120S3-840 | 11 |
| LP30120T830DE-A | 29 |
| LP30120T840DE-A | 29 |
| LP60120P1-840 | 25 |
| LP6060B1-840 | 15 |
| LP6060B1NEX | 19 |
| LP6060B1UGR-840 | 15 |
| LP6060B1UGR-840HP | 15 |
| LP6060B1UGR-840Z1 | 23 |
| LP6060B1UGR-930 | 15 |
| LP6060B1UGR-940 | 15 |
| LP6060B1UGRS-940 | 21 |
| LP6060B3-830ST | 13 |
| LP6060B3-840 | 13 |
| LP6060B3-840ST | 13 |
| LP6060B3-860ST | 13 |
| LP6060B3UGR-840ST | 13 |

| | |
|-------------------|----|
| LP6060B4UGR-840ST | 13 |
| LP6060P1-840 | 25 |
| LP6060P1UGR-840 | 25 |
| LP6060P2-840 | 25 |
| LP6060P2-860 | 25 |
| LP6060S3-840 | 11 |
| LP6060S3UGR-840 | 11 |
| LP60T830-A | 27 |
| LP60T830DE-A | 27 |
| LP60T840-A | 27 |
| LP60T840DE-A | 27 |
| LP6262UGR-840 | 23 |
| LPLAFO120 | 32 |
| LPLAFO1203 | 32 |
| LPLAFO301204 | 33 |
| LPLAFO301207 | 33 |
| LPLAFO30120P | 34 |
| LPLAFO30120R | 34 |
| LPLAFO60 | 32 |
| LPLAFO601204 | 33 |
| LPLAFO601207 | 33 |
| LPLAFO603 | 32 |
| LPLAFO604 | 33 |
| LPLAFO607 | 33 |
| LPLAFO60P | 34 |
| LPLAFO60R | 34 |



1. Applicability

1.1 These general conditions (hereafter the "Conditions") constitute an integral and essential part of the contract of sale between the Parties. The Conditions shall regulate all legal relationships between Dura Lamp Srl (hereafter "Dura Lamp") and the purchaser (hereafter the "Purchaser") where the said relationships are not disciplined by the applicable terms of the Italian Civil Code (C.C.). The nullity of any of the terms of these Conditions shall not prejudice the validity of the remaining Conditions or the Contract.

1.2 Any changes to these Conditions shall be agreed between the Parties in writing, with the exception of the provisions set down in article 1341 of the Italian C.C..

2. Sales

2.1 Sale requests for the products (hereafter the "Products") shall be accepted 'subject to the seller's approval' and shall be considered to be irrevocable in accordance with and as an effect of article 1329 of the C.C. for a period of 1 (one) month from the date of the order requesting execution without prior acknowledgement, pursuant to and as an effect of article 1327 of the C.C. from the date on which the order is received by Dura Lamp.

2.2 The Products detailed in the individual orders and the relevant accessories shall be supplied to the Purchaser by Dura Lamp with "Retention of Title" pursuant to and as an effect of articles 1523-1526 of the Italian C.C. In this case, the transfer of ownership of the Products to the Purchaser shall take place exclusively upon the full payment of the price agreed, whilst any risks shall be the responsibility of the Purchaser from the moment of delivery of the Products.

2.3 Whilst confirming the terms stated above, the Parties hereby agree that should the Products and relevant accessories be destroyed for causes not attributable to Dura Lamp, the Purchaser shall not be released from the obligation to pay for the same, even where the Products have not yet been delivered.

3. Prices

3.1 The prices detailed on the price list shall be applied to Product sales orders. The aforementioned prices shall be unit prices per single item, except where stated otherwise for certain Products. The Parties shall have the right to agree, in writing, any derogations and/or special conditions of sale.

3.2 Moreover, the Parties hereby agree that the following conditions shall be applied:

- (I) Minimum order: € 300 (three hundred) for Italy - € 750 (seven hundred and fifty) for other countries;
- (II) Delivery free to destination in Italy for orders of € 300 (three hundred) for Italy or more;
- (III) Ex-Works deliveries for other countries.

3.3 The prices given above do not include VAT and installation costs.

3.4 The prices provided in this catalogue shall be valid until a new price list is published.

4. Currency

All prices are given in Euros (exclusive of VAT). Invoices shall be drawn up in Euros.

5. Special requests

Products can be supplied to the Purchaser in non-standard colours and with special features. The relevant price, minimum quantities per order, methods and timing of deliveries shall be agreed in each individual case, in relation to the reference order.

6. Transport

6.1 Dura Lamp shall not be liable for any damage and/or losses which may occur during the transportation of the Products, unless the Products are delivered free at destination.

6.2 Dura Lamp shall have the right to establish the method of transportation to be used for the Products, unless the Parties have previously established a method of transport in writing.

6.3 Upon delivery, the Purchaser shall undertake to verify the condition of the products and shall make any complaints directly to the carrier and/or conduct any actions necessary in the event of loss, misplacement, removal or damage, or delays in transportation and/or the methods of delivery of the Products.

7. Complaints

7.1 In the event that the Products are found to have any faults and/or defects, the Purchaser shall undertake to notify Dura Lamp of the same in writing, by means of a registered letter, no later than 8 (eight) days following the discovery of the said faults and/or defects, at the risk of invalidating the obligations of the guarantee provided by Dura Lamp. In this case, the faulty Products, which should be reported within the terms established, should be returned to Dura Lamp, once the Purchaser has received specific permission to do so in writing.

7.2 In the event that the Purchaser's complaints are held to be valid, Dura Lamp, at its complete discretion, may make the necessary repairs and/or replace the Products, excluding the attribution of any further charges, obligations, indemnification or compensation to the same. The Products in question should be returned to the Dura Lamp Srl plant in Via Pratese 164, 50145, Firenze, Italy. In the event that, following an inspection by Dura Lamp, the Products returned by the Purchaser are not found to be faulty and/or defective, Dura Lamp shall return the Products to the Purchaser, charging the same an amount equal to 15% (fifteen percent) of the value of the said Products.

8. Delivery

8.1 The Parties hereby agree that the terms established for the delivery of the Products shall not be considered absolute or essential and that, in any case, each item shall be exclusively in favor of Dura Lamp, unless otherwise agreed in writing between the Parties.

8.2 In the event of delayed delivery, once 15 (fifteen) days have passed since the agreed date, the Purchaser may send Dura Lamp written warning to complete the delivery within a further term of no more than 15 (fifteen) days from receipt of the same. In the event that Dura Lamp has not completed the delivery within this further term the Purchaser may withdraw from the order with regard to the Products that have not yet been delivered. In this case the Purchaser shall only be obliged to pay Dura Lamp for the Products actually delivered, excluding the payment of any further indemnification and/or compensation to the Purchaser.

8.3 Dura Lamp shall not be responsible for any other breaches, including the failure to deliver or delayed delivery of the Products, caused by events outside its reasonable control such as, purely by way of an example and not limited to the same: the failure to deliver or delayed delivery of manufacturing materials by Dura Lamp's suppliers, equipment breakdowns, strikes and other trade union action, electricity blackouts, suspension of or difficulties with transportation.

9. Payment

9.1 The price due shall be paid by the Purchaser according to the conditions and modalities set down in the order and, in any case, by means of payments made exclusively to "DURA LAMP Srl".

9.2 Dura Lamp shall only recognize the validity of the payments when the same are made in compliance with the provisions of article 9.1 above. This means that amounts paid using any other method shall not be considered to be a payment in discharge of the Purchaser's obligations. The eventual acceptance by Dura Lamp of a bank draft or other trade bill shall only occur with the application of the proviso "under usual reserve".

9.3 In the event of delayed payment with respect to the terms agreed, the Parties hereby agree that bank interest shall be due to Dura Lamp at the current PRIME RATE increased by 3 points. interest shall be applied as of right, with no obligation for Dura Lamp to send the Purchaser a formal notice to pay.

9.4 Moreover, in the event of a delay in payment of more than 15 (fifteen) days, Dura Lamp shall have the right to terminate the order as of right pursuant to article 1456 C.C., sending written notification of the same, barring compensation for any damage.

9.5 In the event that the Parties have agreed upon a method of payment by instalments for the Products, the failure to pay several instalments or just one instalment exceeding one eighth of the overall price of the Products, shall result in the loss of the Purchaser's right to pay in instalments and shall give Dura Lamp the right to request the remaining balance of the price or, alternatively, at its own discretion, to terminate the contract with immediate return of the Products and the acquisition of the instalments paid, as indemnification, barring the right to compensation for any damage sustained.

10. Guarantee

10.1 The Products provided by Dura Lamp shall be guaranteed for a period of 12 (twelve) months from the date of delivery against any manufacturing or material defects and/or faults and against any breakdowns not attributable to the Purchaser. Dura Lamp's only obligation and the Purchaser's right with regard to claims related to the guarantee shall be limited, as decided by Dura Lamp, to the replacement or repair of the defective or non-compliant product or the reimbursement of the price for the purchase of another product. Dura Lamp shall be granted a reasonable amount of time to repair or replace the product, or to make the previously authorized reimbursement. Any defective or non-compliant Products shall become the property of Dura Lamp as soon as they have been replaced or reimbursed.

10.2 The guarantee shall exclude any failures due to circumstances beyond the control of Dura Lamp (lightning, flooding, etc.), as well as any damage caused by the improper use of the Products and/or relevant accessories. Notwithstanding the above, Dura Lamp shall not be bound by the guarantee if the contested defects or non-compliances have occurred as a result of submitting the Products to resistance or environmental tests, the incorrect use of the same, or in the event that the use of or conditions of use of the Products is different from that indicated in the instructions and technical information, as a result of negligence, incorrect installation or accident, or if they derive from improper repairs, alterations, modifications, storage or transportation or by incorrect handling.

10.3 The Purchaser shall send the Products returned in accordance with the terms of the guarantee to the place indicated by Dura Lamp in compliance with the Dura Lamp policy regarding authorization to return materials in force at the time. In the event that the Products returned are found to be compliant or not faulty, the Purchaser shall pay the cost of returning the same as well as the cost of insuring, inspecting and handling the Products.

10.4 LED products Enjoy specific guarantees: details are published on www.duralamp.com

11. Limitation of Liability

11.1 With the sole exclusion of criminal intent and gross negligence, Dura Lamp shall not be liable for loss of profits or savings, loss of reputation or goodwill, any direct, indirect, consequential or special damage that may derive from or be connected to the contract or sale of products or services by Dura Lamp or by the use of the same of a contractual or extra-contractual nature or deriving from any other source, even where Dura Lamp has been notified of or is aware of the possibility of such damage.

11.2 The limitations and exclusions stated in article 11 shall apply within the limits permitted by law.

12. Applicable law and place of jurisdiction

12.1 These Conditions and all the effects of the same shall be governed by Italian law. The Parties hereby agree that any disputes related to these Conditions shall refer to Italian jurisdiction to the exclusion of all others.

12.2 The exclusive place of jurisdiction shall be the registered offices of Dura Lamp Srl, with the express exclusion of any other competing places of jurisdiction.



DURA LAMP S.r.l.
Registered office Via Pratese, 164 – 50145 Firenze
Tel. 055 894 881
e-mail: duralamp@duralamp.it

Registered with the Florence Company Register -
C.F. and VAT number 03312240488
Registered with R.E.A. of Florence at n. 353287 Share capital € 400,000.00 i.v.
Subject to the management and coordination of 3F FILIPPI Srl



A complete list of the Dura Lamp distribution
and project network is available at:

www.duralamp.com

DURALAMP | UNICO Catalogue 2025

© Copyright 2025 - Dura Lamp S.r.l.

All data and pictures provided in this catalogue are for reference only: since they might change during mass production, they have to be considered nominal values with tolerances. Dura Lamp reserves the right to modify its products in any moment, for technical or commercial reasons.

Photos: Ivan Rossi - Studio Artale - Studio Ceccanti - Alessandro Maurelli - Luca Visentini

Graphic project: Lorenzetti Communication and FD Graphic Studio

Indoor or outdoor setting photos are used to illustrate the possible applications of the product.



duralamp.com