



## DURASTRIP SELECT IP20

### Typology

24V Strip LED.

### Features

The luminous flux is REAL and measures on the LED strips in their effective use conditions (nominal source values are not reported).

### Installation

The 25W and 60W strips can be installed directly on the application surface using the included double-sided 3M adhesive or bridges: we recommend the using aluminium profiles only with the 96W strips, in order to optimize heat dissipation. When using double-sided tape degrease the application surface adequately.

### Usage information

Dimmable 0-100%  
DALI - DMX  
Analogue and digital domotic control systems  
Push Dali with ZKCDA controllers  
CASAMBI compatible

### Power supply

Max current for single power supply: 4A.

### Packaging

Packaged in 5 meters reels.  
96W strip is packaged in 4 meters rolls.

### Notes


Free wires.  
Strips can be cut to size by following the cutting indications printed on the strips.

### Colour of the light

Choice of white colour temperatures.

### Connections

IP20: terminals with free wires.  
Maximum connection length 5 m. Max 4A.  
For longer connections, connect in series or in parallel, see diagram in Info Tech.  
Strips can be cut to size by following the cutting indications printed on the strips.

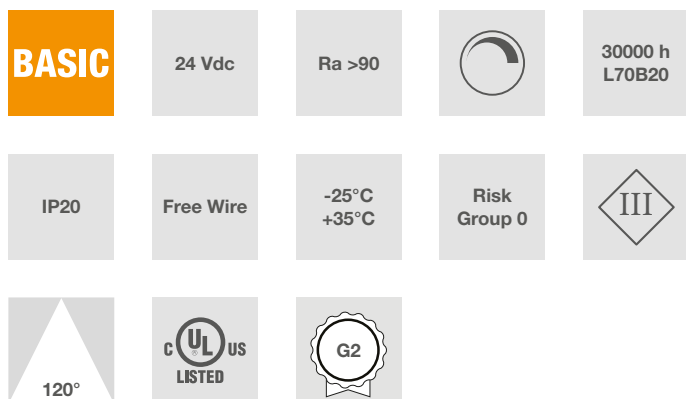


### Characteristic data

Power	60 W	Beam	120°	Dimmable	Yes	Input	24 Vdc
Base	Free Wire	IP	20	Flux	6050 lm	Tc	4000 K
Ra	>90	LED Warranty	G2	RG	RG0		

## Dimensional characteristics



5W/m, 12W/m



L	5000 mm
L1	10 mm
H	2.3 mm

Cutting pitch	100 mm
LED pitch	8 mm

## Lighting and photometric features

Beam opening	120°
Nominal flux per mt	1210 lm/m
Flux	6050 lm
CCT nominal colour temperature	4000 K
Colour of the light	Natural light
Colour rendering index	>90
Lifespan	30000 h
LED lifespan	L70B20
Trigger time	<0,2 s
Heating time up to 60% of full efficiency	Instant Full Light
Mercury	0 mg

## Electrical characteristics

Rated power	60 W
Input voltage	24 Vdc
Dimmable	Yes
Energy efficiency class	This product contains a light source of energy efficiency class "F"
Number of cycles	60000
Operating temperature	-25°C / +35°C
Operating position	360°

## LED Warranty

G2	Up to 2 years (4000h/year) *4000h = 11h a day x 365 days. Without limitations on the duration of use for the first year, provided the observance of the installation conditions.
----	--

## European Directives

2009/125/EC \* Ecodesign  
 2011/65/EU \* RoHS  
 2012/19/EU \* RAEE  
 2014/30/EU \* EMC  
 2015/863 \* Amending RoHS  
 2017/1369 \* Regulation for Energy Labelling  
 2019/2015 \* Regulation for Energy Labelling  
 2019/2020 \* Regulation for Ecodesign  
 2021/340 \* Amending Reg. Energy Labelling  
 2021/341 \* Amending Reg. Ecodesign

## Product standards

CEI EN 55015:2020 (+A11:2020)  
 CEI EN 60598-1:2022  
 CEI EN 60598-2-1:2022  
 CEI EN 61000-3-2:2019 (+A1:2021)  
 CEI EN 61000-3-3:2014 (+EC1:2014/+EC2:2016/+A1:2021/+A2:2022)  
 CEI EN 61547:2010  
 CEI EN 62031:2021 (+A11:2022)  
 CEI EN 62471:2010  
 IEC/TR 62471-2:2009  
 CEI EN 62493:2015  
 CEI 34-141:2014

## Logistics data

Item net weight	93 gr
Barcode single item	8011905849061
Number of pieces multiple pack	20
Minimum order quantity	1
Minimum packaging	1 / 20