

SLIMFLUX BL UGR - PRO

Typology

Direct lighting LED panel.

Features

The positioning of the LED sources on a horizontal plate ensures lighting uniformity on the screen surface and excellent efficiency levels.

The backlit panel is composed of a metal material back compartment providing a heat sink function.

Equipped with special PMMA primary lenses, the LED sources positioned on a horizontal plate ensure lighting uniformity on the diffuser surface and ensure excellent efficiency levels.

Colour rendering: Ra>80 or Ra>90.

Installation

Consider more depth for recessed installations.

Material


Painted white aluminium body; high-transmittance PMMA primary optics.



Characteristic data

Power	40 W	Dimmable	No	Input	220-240 Vac	Base	Free Wire
IP	20	Optical compartment IP	43	Flux	4000 lm	PF	>0,9
UGR	<19	Tc	4000 K	Ra	>80	LED Warranty	G2
RG	RG0						

Dimensional characteristics



L	295 mm
L1	1195 mm
H	25 mm

Lighting and photometric features

Flux	4000 lm
CCT nominal colour temperature	4000 K
Colour of the light	Natural light
Colour rendering index	>80
Lifespan	25000 h
LED lifespan	L70B20
Trigger time	<0,2 s
Heating time up to 60% of full efficiency	Instant Full Light
UGR	<19

Electrical characteristics

Rated power	40 W
Input voltage	220-240 Vac
Frequency	50-60 Hz
Dimmable	No
Power factor (PF)	>0,9
Operating temperature	-20°C / +45°C



Photometry

	4000K	H(m)	D1(m)	D2(m)	E _{max} (lx)	
	Ra80		86°	90°		
	Fixture Power	40W	1	1.87	2.02	1910
	Source Flux	4000lm	2	3.75	4.03	478
	Fixture Flux	4000lm	3	5.62	6.05	212
	Efficacy	100lm/W	4	7.50	8.07	119
	I _{max} =478cd/klm	I _{max}	1910cd	5	9.37	10.08

EuLumDat file on the site

Other Infotech

Flicker Free	Yes
Light source replaceability	Replaceable (LED only) light source by a professional.
Control gear replaceability	Replaceable control gear by a professional.

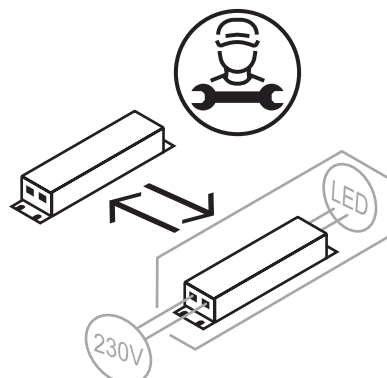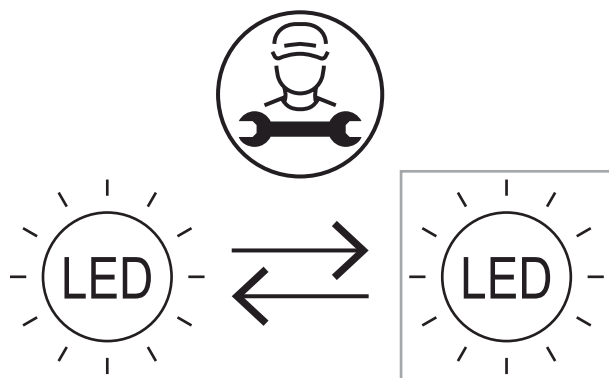

LED Warranty

G2	Up to 2 years (4000h/year) *4000h = 11h a day x 365 days. Without limitations on the duration of use for the first year, provided the observance of the installation conditions.
----	--

European Directives

2009/125/EC * Ecodesign
2011/65/EU * RoHS
2012/19/EU * RAEE
2014/30/EU * EMC
2014/35/EU * LVD
2015/863 * Amending RoHS
2017/1369 * Regulation for Energy Labelling
2019/2015 * Regulation for Energy Labelling
2019/2020 * Regulation for Ecodesign
2021/340 * Amending Reg. Energy Labelling
2021/341 * Amending Reg. Ecodesign

Product standards

CEI EN 55015:2020 (+A11:2020)
CEI EN 60598-1:2022
CEI EN 60598-2-1:2022
CEI EN 61000-3-2:2019 (+A1:2021)
CEI EN 61000-3-3:2014 (+EC1:2014/+EC2:2016/+A1:2021/+A2:2022)
CEI EN 61547:2010
CEI EN 62031:2021 (+A11:2022)
CEI EN 62471:2010
IEC/TR 62471-2:2009
CEI EN 62493:2015
CEI 34-141:2014

Logistics data

Item net weight	1780 gr
Barcode single item	8011905001124
Number of pieces multiple pack	6
Minimum order quantity	6
Minimum packaging	6 / 6