



## SLIMFLUX SL UGR - PRO - NO DRIVER

### Typology

Ultra-flat LED fixtures with lateral lighting.  
Driver NOT included, to be fitted with the suitable driver.  
Equipped with steel anti-fall safety cable.

### Features

Side heat dissipation.  
Immediate switch-on.  
Colour rendering: Ra>80.  
Driver NOT included, to be fitted with the suitable driver.  
Do not use with dimmer.  
If you want to dim or use the multicurrent power supply dimmer.  
UGR version.  
Class III fittings.

### Installation

Possibilities include: recessed, suspended, ceiling/wall.  
Surface mounting & adjustable suspension wire kits are available as accessories.

### Material

White painted aluminium body; high transmittance optical PMMA screen.

### Usage information

Remote on/off driver code: ZKLP600EL.

### Emergency

SLIMFLUX panels can be used with standby emergency kit, code KTEMR03.  
If you wish to dim, use the DALI dimmable power supply unit code A01486.

### Notes

Providing greater visual comfort, improved definition of detail and reduction of stress.

PRO

220-240 Vac

Ra >80

50000 h L80B20

IP20 VI IP43 VO

Free Wire

-20°C +45°C

Risk Group 0

UGR <19

FLICKER FREE

G5 h24

### Characteristic data

Power	28 W	Dimmable	No	Input	220-240 Vac	Base	Free Wire
IP	20	Optical compartment IP	43	Flux	3730 lm	UGR	<19
Tc	4000 K	Ra	>80	LED Warranty	G5h24	RG	RG0

## Dimensional characteristics



L	1195 mm
L1	295 mm
H	8.5 mm

## Lighting and photometric features

Flux	3730 lm
CCT nominal colour temperature	4000 K
Colour of the light	Natural light
Colour rendering index	>80
Lifespan	50000 h
LED lifespan	L80B20
Trigger time	<0,2 s
Heating time up to 60% of full efficiency	Instant Full Light
UGR	<19

## Electrical characteristics


Rated power	28 W
Input voltage	220-240 Vac
Frequency	50/60 Hz
Dimmable	No
Operating temperature	-20°C / +45°C

## Photometry

EuLumDat file on the site

## Other Infotech

Flicker Free	Yes
Light source replaceability	Replaceable (LED only) light source by a professional.
Control gear replaceability	Replaceable control gear by a professional.

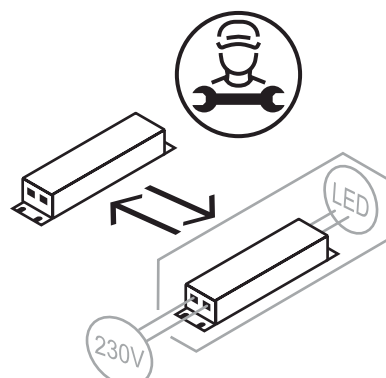

## LED Warranty

G5h24

Full Guarantee  
5 years  
(24h/24h) Without limitations on the duration of use for the first year, provided the observance of the installation conditions.

## European Directives

2009/125/EC \* Ecodesign  
2011/65/EU \* RoHS  
2012/19/EU \* RAEE  
2014/30/EU \* EMC  
2014/35/EU \* LVD  
2015/863 \* Amending RoHS  
2017/1369 \* Regulation for Energy Labelling  
2019/2015 \* Regulation for Energy Labelling  
2019/2020 \* Regulation for Ecodesign  
2021/340 \* Amending Reg. Energy Labelling  
2021/341 \* Amending Reg. Ecodesign

## Product standards

CEI EN 55015:2020 (+A11:2020)  
CEI EN 60598-1:2022  
CEI EN 60598-2-1:2022  
CEI EN 60598-2-2:2012  
CEI EN 61000-3-2:2019 (+A1:2021)  
CEI EN 61000-3-3:2014 (+EC1:2014/+EC2:2016/+A1:2021/+A2:2022)  
CEI EN 61547:2010  
CEI EN 62031:2021 (+A11:2022)  
CEI EN 62471:2010  
IEC/TR 62471-2:2009  
CEI EN 62493:2015  
CEI 34-141:2014

## Logistics data

Item net weight	2200 gr
Barcode single item	8011905931919
Number of pieces multiple pack	5
Minimum order quantity	1
Minimum packaging	1 / 5