


DALI 2 - 1-10V - PUSH DALI DRIVER

Features

Can be used with fittings with replaceable remote driver.  
220÷240 V 50/60 Hz  
Lifetime 50000 h.

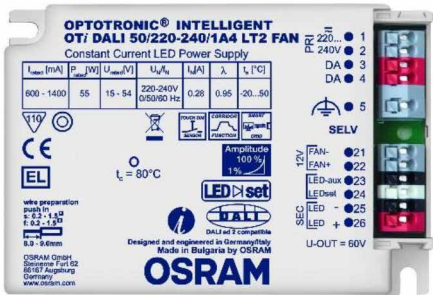

220-240  
Vac

  
DALI 2

100000 h

IP20

-20°C  
+45°C

SELV













Characteristic data

|       |      |              |        |       |             |    |    |
|-------|------|--------------|--------|-------|-------------|----|----|
| Power | 55 W | Dimmable     | DALI 2 | Input | 220-240 Vac | IP | 20 |
| PF    | 0.95 | LED Warranty | G5h24  |       |             |    |    |

Dimensional characteristics

|    |        |
|----|--------|
| L  | 110 mm |
| L1 | 75 mm  |
| H  | 26 mm  |

Lighting and photometric features

|          |          |
|----------|----------|
| Lifespan | 100000 h |
|----------|----------|

Electrical characteristics

|                       |               |
|-----------------------|---------------|
| Rated power           | 55 W          |
| Input voltage         | 220-240 Vac   |
| Frequency             | 50 Hz         |
| Output voltage        | 15-54 Vdc     |
| Dimmable              | DALI 2        |
| Power factor (PF)     | 0.95          |
| Input current         | 0.28 A        |
| Operating temperature | -20°C / +45°C |

## Other Infotech

|                      |     |
|----------------------|-----|
| Flicker Free         | Yes |
| Max Case Temperature | 80  |

## LED Warranty

|       |   |
|-------|---|
| G5h24 | Full Guarantee<br>5 years<br>(24h/24h) Without limitations on the duration of use for the first year, provided the observance of the installation conditions. |
|-------|---|

## European Directives

2009/125/EC \* Ecodesign  
 2011/65/EU \* RoHS  
 2012/19/EU \* RAEE  
 2014/30/EU \* EMC  
 2014/35/EU \* LVD  
 2015/863 \* Amending RoHS  
 2017/1369 \* Regulation for Energy Labelling  
 2019/2015 \* Regulation for Energy Labelling  
 2019/2020 \* Regulation for Ecodesign  
 2021/340 \* Amending Reg. Energy Labelling  
 2021/341 \* Amending Reg. Ecodesign

## Product standards

CEI EN 55015:2020 (+A11:2020)  
 CEI EN 61000-3-2:2019 (+A1:2021)  
 CEI EN 61000-3-3:2014 (+EC1:2014/+EC2:2016/+A1:2021/+A2:2022)  
 CEI EN 61347-1:2016 (+A1:2021)  
 CEI EN 61347-2-13:2015 (+A1:2018)  
 CEI EN 61547:2010

## Logistics data

|                        |               |
|------------------------|---------------|
| Item net weight        | 180 gr        |
| Barcode single item    | 8011905981310 |
| Minimum order quantity | 1             |
| Minimum packaging      | 1 / 1         |