



## DURASTRIP EXTRALONG 48V IP65

EXTRALONG 48V produced in 50 metre reels allow for installations of great lengths, up to a max of 50m also with chain segments connection, without extra power supplies. With two strips (not connected) and two drivers at opposite ends, light lines of up to 100 metres can be achieved!

EXTRALONG 48V have all the same quality components and construction method as all other strips in the range to obtain real lighting uniformity over the entire length of the strips.

### Installation

Complete with 3M double-sided tape to attach to the surface.

When using double-sided tape degrease the application surface adequately.

### Packaging

Packaged in 50 meters reels.

Or custom products cut to specific lengths see page 11, 322.

### LED

LED 2835SMD

84 LED/m

5.6W/m

48VDC

Ra>90

Lifetime: >50,000h

Warranty: 5 years

### Colour of the light

Choice of white colour temperatures.

### Binning

ANSI/SDCM: 2 step.


3000K - 4000K

### Connections

Complete with IP65 / 68 Male/Female wire on 2 sides, length 15 cm.

Maximum connection length 50 m.


Strips can be cut to size by following the cutting indications printed on the strips.

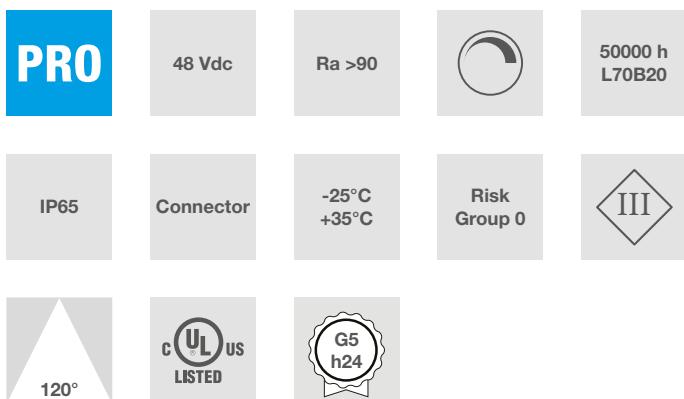

### Characteristic data

Power	225 W	Beam	120°	Dimmable	Yes	Input	48 Vdc
Base	Connector	IP	65	Flux	20800 lm	Tc	3000 K
Ra	>90	LED Warranty	G5h24	RG	RG0		

## Dimensional characteristics

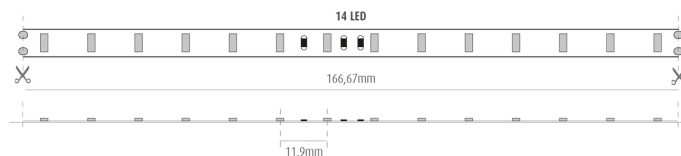

L	50000 mm
L1	14 mm
H	1.7 mm

Cutting pitch	166.67 mm
LED pitch	11.9 mm

## Lighting and photometric features

Beam opening	120°
Nominal flux per mt	520 lm/m
Flux	20800 lm
CCT nominal colour temperature	3000 K
Colour of the light	Warm light
Colour rendering index	>90
Lifespan	50000 h
LED lifespan	L70B20
Trigger time	<0,2 s
Heating time up to 60% of full efficiency	Instant Full Light
Mercury	0 mg

## Electrical characteristics

Rated power	225 W
Input voltage	48 Vdc
Dimmable	Yes
Energy efficiency class	This product contains a light source of energy efficiency class "F"
Number of cycles	100000
Operating temperature	-25°C / +35°C
Operating position	360°

## Photometry

	3000K	H(m)	D(m)	E <sub>max</sub> (lx)
	Ra90		117°	
	Fixture Power	6W	1	3.25
	Source Flux	520lm	2	6.50
	Fixture Flux	520lm	3	9.74
	Efficacy	93lm/W	4	12.99
	923242 I <sub>max</sub> =316cd/klm	I <sub>max</sub>	164cd	5
			16.24	7

EulumDat file on the site

## LED Warranty

G5h24	Full Guarantee 5 years (24h/24h) Without limitations on the duration of use for the first year, provided the observance of the installation conditions.
-------	---

## European Directives

2009/125/EC \* Ecodesign  
2011/65/EU \* RoHS  
2012/19/EU \* RAEE  
2014/30/EU \* EMC  
2015/863 \* Amending RoHS  
2017/1369 \* Regulation for Energy Labelling  
2019/2015 \* Regulation for Energy Labelling  
2019/2020 \* Regulation for Ecodesign  
2021/340 \* Amending Reg. Energy Labelling  
2021/341 \* Amending Reg. Ecodesign

## Product standards

CEI EN 55015:2020 (+A11:2020)  
CEI EN 60598-1:2022  
CEI EN 60598-2-1:2022  
CEI EN 61000-3-2:2019 (+A1:2021)  
CEI EN 61000-3-3:2014 (+EC1:2014/+EC2:2016/+A1:2021/+A2:2022)  
CEI EN 61547:2010  
CEI EN 62031:2021 (+A11:2022)  
CEI EN 62471:2010  
IEC/TR 62471-2:2009  
CEI EN 62493:2015  
CEI 34-141:2014

## Logistics data

Item net weight	1856 gr
Barcode single item	8011905923242
Minimum order quantity	1
Minimum packaging	1 / 1