



DURALUX D

Typology

Compact, circular and linear fluorescent lamps.

Features

The best fluorescent and triphosphorous powders for maximum light colour control and light emission over time, good colour rendering and the excellent luminous efficiency.

A wide reliable range for installation in professional contexts such and home environments.

63,7 Vac

Ra >80



10000 h

IP20

G24d-1

-15°C
+35°C



Characteristic data

Power	10 W	Beam	320°	Dimmable	No	Input	63,7 Vac
Base	G24d-1	IP	20	Flux	600 lm	Tc	3000 K
Ra	>80						

Dimensional characteristics

ø	40 mm
H	120 mm


Lighting and photometric features

Beam opening	320°
Flux	600 lm
CCT nominal colour temperature	3000 K
Colour of the light	Warm light
Colour rendering index	>80
Lifespan	10000 h
Mercury	2,5 mg
Lamp survival factor at 2000h	100
Lamp survival factor at 4000h	95
Lamp survival factor at 6000h	80
Lamp survival factor at 8000h	70
Lamp survival factor at 10000h	50
Lamp survival factor at 12000h	45

Electrical characteristics

Rated power	10 W
Input voltage	63,7 Vac
Frequency	50 Hz
Dimmable	No
Input current	0.185 A
Weighted energy consumption	13 kWh/1000h
Operating temperature	-15°C / +35°C
Equivalence with incandescent lamp	51
Operating position	360°

Spectrometry

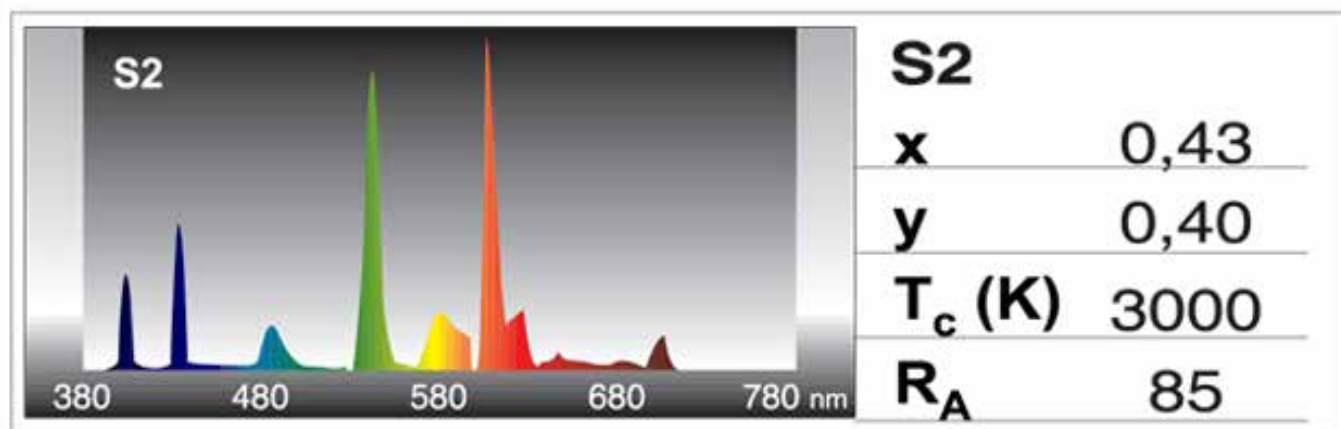

Standards and Directives

2004/108/CE * Compatibilità Elettromagnetica	EN 61000-3-2 * anno 2007
2011/65/UE * RoHS	EN 61000-3-2/A1/A2 * anno 2011
2012/19/UE * RAEE	EN 61000-3-3 * anno 2014
2009/125/CE * Progettazione Eco Compatibile	244/2009 * Progettazione Eco Compatibile
EN 60968 ° anno 2013	859/2009 * Progettazione Eco Compatibile
EN 61547 * anno 2010	2010/30/EU * Energy Consumption
EN 55015 * anno 2014	874/2012 * Regulation for Energy Labelling

Logistics data

Barcode single item	8011905190590
Number of pieces multiple pack	50
Barcode multiple pack	8011905700446