



ECO LIFE - SPIRAL TRIPACK



Characteristic data

Power	15 W	Beam	320°	Dimmable	No	Input	220-240 Vac
Base	E27	IP	20	Flux	800 lm	PF	0,55
Tc	2700 K	Ra	>80				

Dimensional characteristics



Ø	47 mm
H	120 mm


Lighting and photometric features

Beam opening	320°
Flux	800 lm
CCT nominal colour temperature	2700 K
Colour of the light	Homelight
Colour rendering index	>80
Lifespan	8000 h
LED lifespan	L65
Trigger time	<=0.3 s
Heating time up to 60% of full efficiency	<30s
Mercury	<2,5 mg

Electrical characteristics

Rated power	15 W
Input voltage	220-240 Vac
Frequency	50 Hz
Dimmable	No
Power factor (PF)	0,55
Input current	0.11 A
Weighted energy consumption	15 kWh/1000h
Number of cycles	10000
Operating temperature	-15°C / +35°C
Equivalence with incandescent lamp	60

Spectrometry

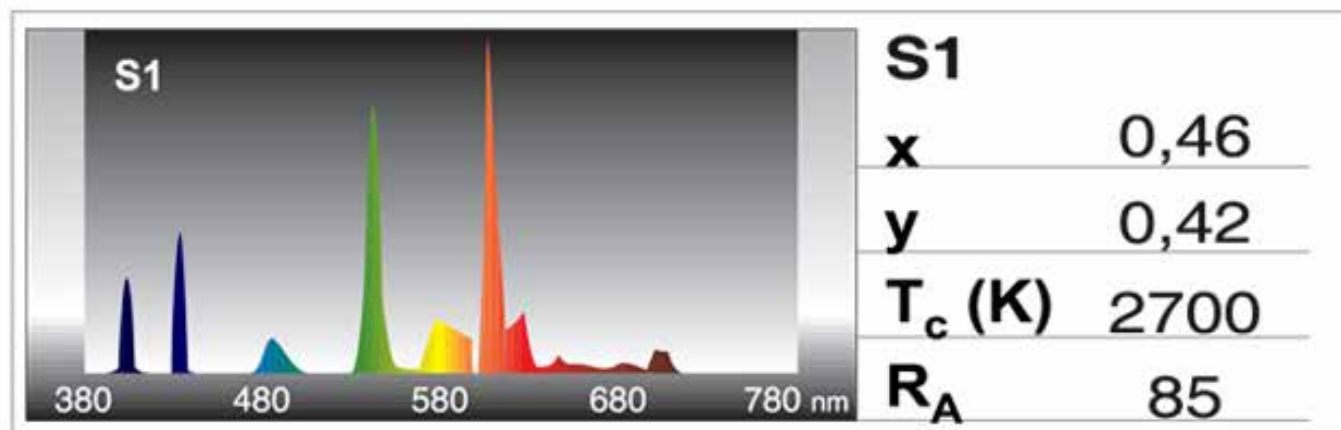

Standards and Directives

2009/125/EC * Ecodesign	CEI EN 55015:2014 (+A1:2016)
1194/2012 * Regulation for Ecodesign	CEI EN 60598-1:2015 (+EC:2015/+EC:2016)
2015/1428 * Regulation for Ecodesign	CEI EN 60598-2-5:2016
2010/30/EU * Energy Labelling	CEI EN 61000-3-2:2015
874/2012 * Regulation for Energy Labelling	CEI EN 61000-3-3:2014 (+EC:2014)
2011/65/EU * RoHS	CEI EN 61547:2010
2012/19/EU * RAEE	CEI EN 62031:2009 (+A1/+A2:2015)
2014/30/EU * EMC	CEI EN 62471:2010
2014/35/EU * LVD	IEC/TR 62471-2:2009
	CEI 34-141:2012

Logistics data

Item net weight	46 gr
Barcode single item	8011905831912
Number of pieces multiple pack	20
Barcode multiple pack	8011905777197