


Constant current independent driver PBL Series suffix 4 (Dual input+DIP-switch)

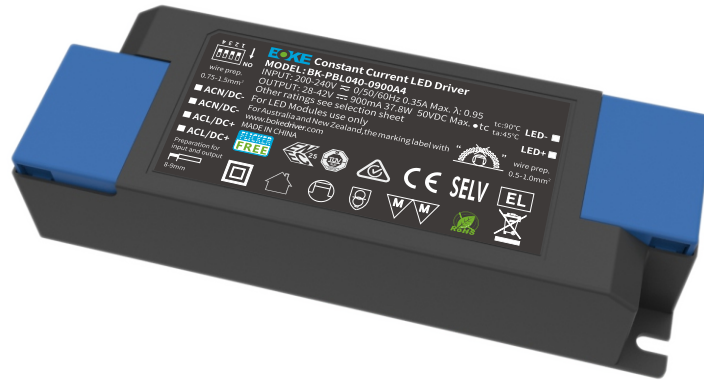

Features

- 5-level of current output optional by DIP-switch
- Loop-in and loop-out wiring without junction box
- Input terminals supports 0.75-1.5mm² cables , wiring is more reliable
- Screw-free and pressing type strain relief, supports thicker cables and is easier to install
- Soft dimming and flicker-free at any brightness
- No-load power input<0.5W, meets the requirements of ErP certification
- High PF, high efficiency, low THD
- SELV and Class II design, suitable for use inside of the light
- Passed ENEC-TUV,CE,RCM,CCC and other certifications
- IP20 protection grade, indoor use
- Nominal life-time up to 100,000 h
- 5-year guarantee

Functions

- DIP switch to switch output current
- Support central emergency application (100% output in DC input)
- Support self-contained emergency application
- Protective features (short-circuit,no-load protection)


Suitable for lights

- Suitable for lights with independent drivers such as downlights, spotlights, panel lights, etc
- Not suitable for lights with built-in drivers

Typical applications

- LED indoor lighting
- LED office lighting
- LED commercial lighting

Model coding rules of PBL series

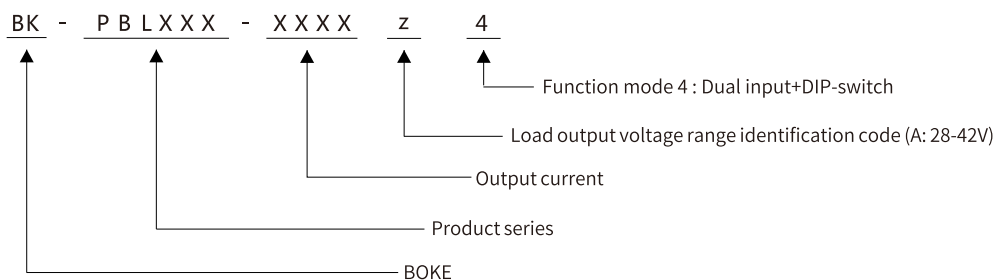

Technical data


Product model	BK-PBL040-0900A4	
Output parameters		
Regulation method	Constant Current	
Rated output current	0.7-0.9A	
Rated output voltage	28-42V	
Rated output power	37.8W Max	
Output current adjustment	DIP S.W(5 levels)	
Output current ripple LF	±1%	
Output current accuracy	±5%	
Linear regulation	±5%	
Load regulation	±5%	
No load output voltage	50V	
Flicker-free(typical)	Modulation depth =0.193% (100 Hz), Pst LM = 0.015, SVM = 0.005,(The above parameters are obtained from testing the panel lights)	
Input parameters		
Rated input voltage	200-240VAC 200-240VDC	
Rated input voltage	180-264VAC 180-264VDC	
Input votage shock	<380 V AC, 1 h	
Input current	<0.35A (AC input)	
Input frequency	0/50/60Hz	
Input power factor	>0.95 (230V AC & Full load)	
Input THD	<10% (230V AC & Full load)	
Efficiency(typical)	88% (230V AC & Full load)	
In-rush current	14A peak ,280us duration(50 % Ipeak), see the description below for details	
Start/Switchover/Turn off	<0.5s(AC start),<0.5s(DC start),<0.3s(AC/DC switchover),<0.5s(Turn off)	
Switching cycles	> 50,000 switching cycles	
Power consumption	Full load(Pmax):37.8W, No load(Pno): <0.5W, On stand-by(Psb) : N/A, Network stand-by(Pnet) : N/A	
Safety		
Withstand voltage	I/P-O/P:3750V AC	
Mains surge capability	L-N:2KV	
Leakage current	<0.7mA (230V AC & Full load)	
Isolation resistance	I/P-O/P:100MΩ/500Vdc/25°C/70% RH	
Control interface		
DALI dimming port	N/A	
PUSH dimming port	N/A	
1-10V 3in1 dimming port	N/A	
Auxiliary power supply	N/A	
Dimming range	N/A	
Dimming drive mode	N/A	
Emergency support		
Central emergency system	Supported(100% output in DC input)	
Self-contained emergency	Supported	
Environment & Life time		
Operating temperature	Ta=-20-45°C	
Case temperature	Tc=90°C	
Operating humidity	5-85% RH, not condensed	
Storage temp./humidity	-40-80°C, 5-85% RH, not condensed	
IP grade	IP20	
MTBF	500,000H,MIL-HDBK-217F(25°C)	
Life-time	Nominal life-time up to 100,000 h, see the description below for details	
Vibration resistant	10~500Hz,5G 12min./1cycle,period for 72min. each along X,Y,Z axes	
Acoustic Noise	<25dB(30cm, Full load)	
Environmental protection	RoHS	
Certifications and standards		
Certified	ENEC-TUV,RCM, EMC, CE, CCC	
Safety	EN61347-1, EN61347-2-13, EN62384	
EMC	EN55015, EN61000-3-2 , EN61000-3-3, EN61000-4-2,3,4,5,6,8,11, EN61547	
DALI-2	N/A	
EL	Compatible IEC 61347-2- 13 Annex J, compatible with EN 60598-2-22 and EN 50172	
RF	N/A	

Remarks

- 1.By default, all parameter are measured at 230V AC input, full load and 25°C of ambient temperature.
- 2.The driver can not be installed inside the light. when the driver is used with the light, the EMC of the whole light needs to be tested.

Expected life-time

Life-time vs. case temperature

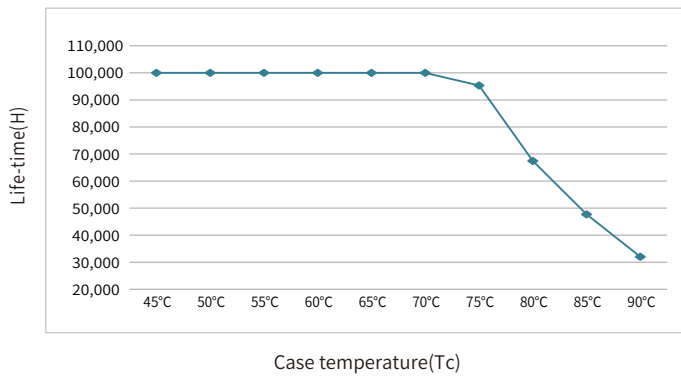

- The life-time of the LED driver is shown in the figure above (calculated based on the 90% survival rate).
- The relation of tc to ta temperature depends also on the luminaire design.

Surge

Model	Ipeak	Twidth	Condition	Relative number of MCB														
				B10	B13	B16	B20	B25	C10	C13	C16	C20	C25	D10	D13	D16	D20	D25
BK-PBL040-0900A4	14A	280us	AC 230V, Full load, Cold start, Ta ≤ 30°C, MCB is not installed side by side	15	20	24	30	38	25	33	40	50	63	35	45	56	70	87

Remarks

- The number of drives mounted under different MCBs in the table is the maximum value. Please do not exceed this number during installation.
- Calculation uses typical values from ABB series S200 as a reference.
- Different brands and models of miniature circuit breakers, the number of drives mounted will be slightly different.
- If the ambient temperature of the MCB installation exceeds 30°C or multiple MCBs are installed side by side, the number of drives mounted will be reduced and the calculation needs to be recalculated.
- Electrician's usually consider Type B for household lighting and Type C for commercial lighting application.

Functions

Output short-circuit protection

- Output short-circuit will not damage the driver.
- After removing the short-circuit fault point, the driver will automatically restore output.

Output no-load protection

- Output no-load will not damage the driver.
- Please turn off the mains first if you need to connect the LED load.

Label



MODEL: BK-PBL040									
Switching selection sheet									
Pin typ.	Prated(W)	Irated(mA)	Voltage(Vdc)	1	2	3	4		
35.5	29.4	700	28-42	ON	ON	ON	ON		
38.0	31.5	750	28-42	ON	ON	ON	ON		
40.3	33.6	800	28-42	ON	ON	ON	ON		
43.9	35.7	850	28-42	ON	ON	ON	ON		
45.4	37.8	900	28-42	ON	ON	ON	ON		

DIP Switch & output current




BK-PBL040-0900A4

Pin	I _{rated}	Voltage	1	2	3	4
35.5W	700mA	42VDC	ON	ON	ON	ON
38.0W	750mA	42VDC	ON	ON	ON	--
40.3W	800mA	42VDC	ON	ON	--	--
43.9W	850mA	42VDC	ON	--	--	--
45.4W	900mA ★	42VDC	--	--	--	--

Remarks:

- ★ It means that this item is the factory default current.
- It means that this channel is OFF.

Wiring diagram

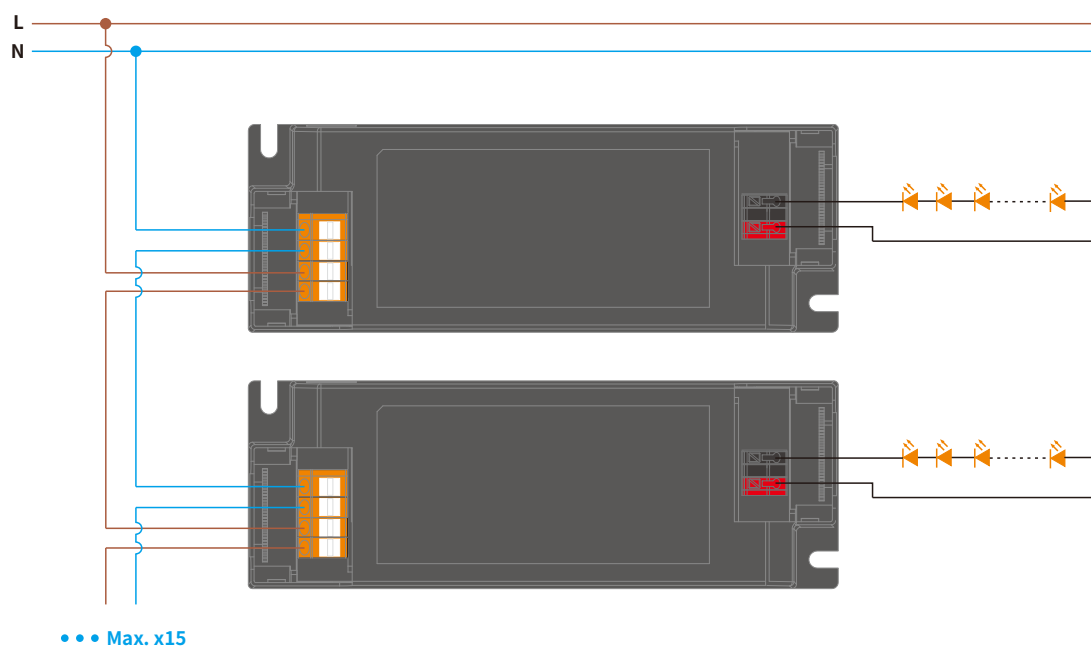


Support loop-in and loop-out wiring

Installation

Mechanical dimensions


Unit:mm

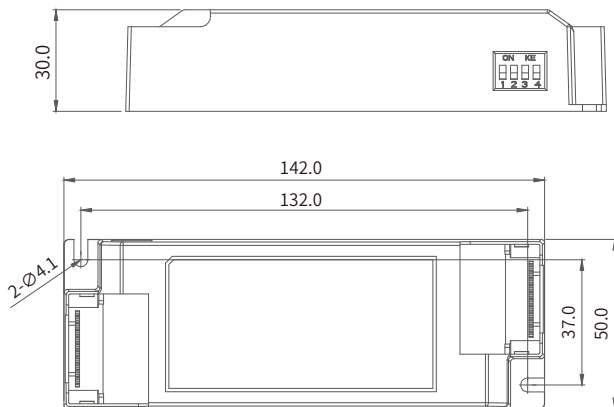

INPUT

Pin Numbering	function	colour
1	ACN	orange
2	ACN	orange
3	ACL	orange
4	ACL	orange


Input wire



OUTPUT

Pin Numbering	function	colour
1	LED-	black
2	LED+	red

Output wire



Installation note

Hot plug-in

- Hot plug-in is not supported due to residual output voltage of > 0 V.

Wiring guidelines

- All connections must be kept as short as possible to ensure good EMI behaviour.
- Mains leads should be kept apart from LED Driver and other leads (ideally 5 – 10 cm distance)
- Max. length of output wires is 2 m.
- Incorrect wiring can damage LED modules.

Mounting screw specifications and torque


- Max. torque at the clamping screw: 0.5 Nm / M4

Replace LED module

1. Mains off
2. Remove LED module
3. Wait for 3 seconds
4. Connect LED module again

Packaging

Optional 1: factory default

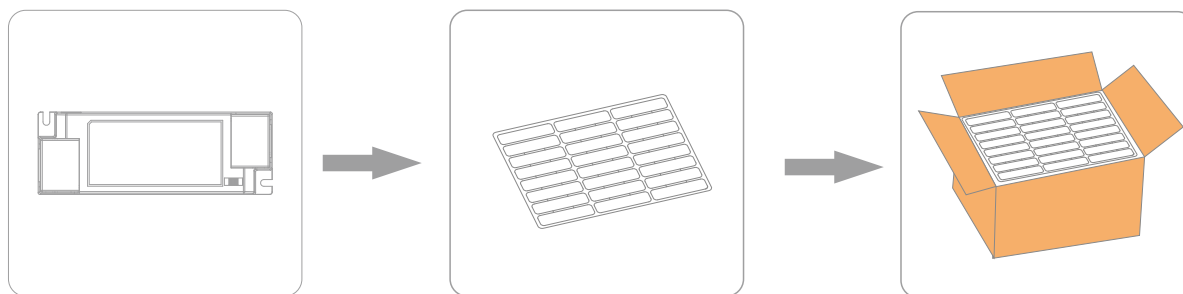


Product

Blister

18pcs×3layer=54pcs/CIN

Model	Product size	Weight	Blister size	Carton size	Qty/carton	N.W	G.W
PBL040	L142*W50*H30mm	138g	L430*W340*H48mm	L450*W350*H180mm	54pcs	7.45kg	9.50kg

Optional 2:

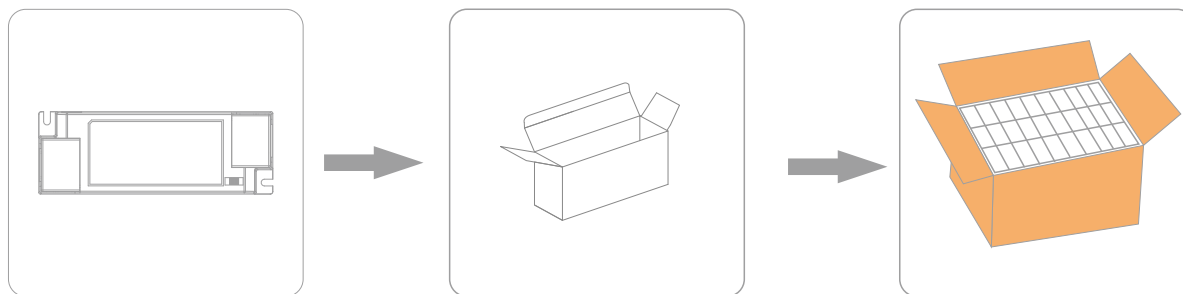

Product

Packaging

14pcs×5layer=56pcs/CIN

Model	Product size	Weight	Packaging size	Carton size	Qty/carton	N.W	G.W
PBL040	L142*W50*H30mm	138g	L178*W59*H50mm	L440*W375*H222mm	56pcs	7.70kg	10.0kg

Additional information

1. This product can only be used outside the light body, Can not be used inside of the light, and it must be used within the specified working environment.
2. The life and MTBF of the product are for reference only, and do not represent a warranty statement. If the drive has been turned on, there is no warranty.
3. For more information, please send an email to info@bokedriver.com.