



DURA STRIP S BEND

Typology

24V Strip LED.

Features

Owing to the particular qualities of the substrate, DURA STRIP S BEND allows tight corners to be created while maintaining the uniformity of light.

Installation

Complete with 3M double-sided tape to attach to the surface.
When using double-sided tape degrease the application surface adequately.

Applications

It is Ideal for following and emphasising the most imaginative forms of modern architecture along with providing creative lighting solutions for many other applications where a minimal installation radius is desired.

Usage information

Dimmable 0-100% Flicker Free
DALI - DMX - 1-10
Analogue and digital domotic control systems
Push Dali with ZKCD AFF controllers
CASAMBI compatible

Packaging

Packaged in 5 meters reels.
This product can be customized: consult the catalogue or the sales force for details.

Colour of the light

Choice of white colour temperatures.

Binning

ANSI/SDCM: 3 step.

Connections

IP20: terminals with free wires.
Maximum connection length 5 m. Max 4A.
Strips can be cut to size by following the cutting indications printed on the strips.



24 Vdc

Ra >90




50000 h
L70B20

IP20

Free Wire

-25°C
+35°C


Risk
Group 0



Characteristic data

Power	36 W	Beam	120°	Dimmable	Yes	Input	24 Vdc
Base	Free Wire	IP	20	Tc	2700 K	Ra	>90
LED Warranty	G5h24	RG	RG0				

Dimensional characteristics

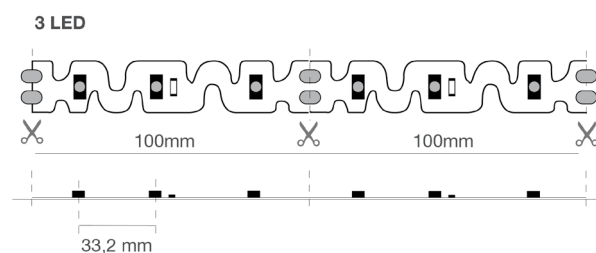

L	5000 mm
L1	6 mm
H	1 mm

Cutting pitch	100 mm
LED pitch	33.2 mm

Lighting and photometric features

Beam opening	120°
Nominal flux per mt	520 lm/m
CCT nominal colour temperature	2700 K
Colour of the light	Warm light
Colour rendering index	>90
Lifespan	50000 h
LED lifespan	L70B20
Trigger time	<0,2 s
Heating time up to 60% of full efficiency	Instant Full Light
Mercury	0 mg

Electrical characteristics

Rated power	36 W
Input voltage	24 Vdc
Dimmable	Yes
Energy efficiency class	This product contains a light source of energy efficiency class "G"
Operating temperature	-25°C / +35°C
Operating position	360°

Photometry

	2700K	H(m)	D(m)	E _{max} (lx)
	Ra80		117°	
Fixture Power	7W	1	3.25	164
Source Flux	520lm	2	6.50	41
Fixture Flux	520lm	3	9.74	18
Efficacy	72lm/W	4	12.99	10
955267 I _{max} =316cd/klm	I _{max}	5	16.24	7

EulumDat file on the site

LED Warranty

G5h24	Full Guarantee 5 years (24h/24h) Without limitations on the duration of use for the first year, provided the observance of the installation conditions.
-------	---

European Directives

2009/125/EC * Ecodesign
 2011/65/EU * RoHS
 2012/19/EU * RAEE
 2014/30/EU * EMC
 2015/863 * Amending RoHS
 2017/1369 * Regulation for Energy Labelling
 2019/2015 * Regulation for Energy Labelling
 2019/2020 * Regulation for Ecodesign
 2021/340 * Amending Reg. Energy Labelling
 2021/341 * Amending Reg. Ecodesign

Product standards

CEI EN 55015:2020 (+A11:2020)
 CEI EN 60598-1:2022
 CEI EN 60598-2-1:2022
 CEI EN 61000-3-2:2019 (+A1:2021)
 CEI EN 61000-3-3:2014 (+EC1:2014/+EC2:2016/+A1:2021/+A2:2022)
 CEI EN 61547:2010
 CEI EN 62031:2021 (+A11:2022)
 CEI EN 62471:2010
 IEC/TR 62471-2:2009
 CEI EN 62493:2015
 CEI 34-141:2014

Logistics data

Item net weight	75 gr
Barcode single item	8011905955267
Number of pieces multiple pack	20
Minimum order quantity	20
Minimum packaging	20 / 20