


## EMERGENCY ELECTRONIC UNIT FOR STANDBY LIGHTING

### Standby emergency kit

Emergency electronic unit for standby lighting (as indicated by the UNI EN 1838) suitable for current controlled power LED.  
 Can be used for maintained or emergency operation.  
 Can be used with max 2A - 90V.  
 Battery life: 3 hours (battery pack dimensions: 135 x 45 x 23 mm).  
 Battery inserted in a protective case in accordance with regulations.  
 Residual flux in emergency 7%.

Reserve lighting means lighting that allows you to continue normal activity without substantial change.  
 Fixtures indicated as compatible with the kit have passed the required tests for the reserve lighting category in compliance with EN 60598-2-22.

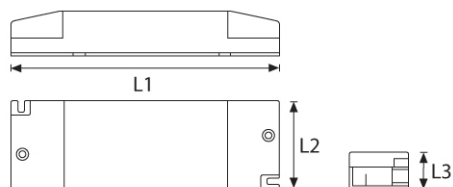

driver — emerg. — LED

Screws

-25°C  
+35°C

### Characteristic data

Base	Screws						
------	--------	--	--	--	--	--	--

### Dimensional characteristics

L	155 mm
L1	56 mm
H	25 mm

### Electrical characteristics

Output voltage	90 Vdc
Operating temperature	-25°C / +35°C

## European Directives

2009/125/EC \* Ecodesign  
 2011/65/EU \* RoHS  
 2012/19/EU \* RAEE  
 2014/30/EU \* EMC  
 2014/35/EU \* LVD  
 2015/863 \* Amending RoHS  
 2017/1369 \* Regulation for Energy Labelling  
 2019/2015 \* Regulation for Energy Labelling  
 2019/2020 \* Regulation for Ecodesign  
 2021/340 \* Amending Reg. Energy Labelling  
 2021/341 \* Amending Reg. Ecodesign

## Product standards

CEI EN 55015:2020 (+A11:2020)  
 CEI EN 61000-3-2:2019 (+A1:2021)  
 CEI EN 61000-3-3:2014 (+EC1:2014/+EC2:2016/+A1:2021/+A2:2022)  
 CEI EN 61347-1:2016 (+A1:2021)  
 CEI EN 61347-2-13:2015 (+A1:2018)  
 CEI EN 61547:2010

## Logistics data

Barcode single item	8011905849177
Number of pieces multiple pack	10