

**DURA**  
LAMP

DOWNLIGHTS



LUMINOUS FITTINGS





# Luminous Fittings

## Downlights



**6** **BASIC**  
LESELI SC



**8** **BASIC**  
LESELI CCT



**10** **BASIC**  
LESELI SLIM DS



**12** **PRO**  
RTF100



**14** **PRO**  
RTF100 L2



**16** **PRO**  
RTF CCT IP65



**18** **PRO**  
REFL CCT



**20** **PRO**  
HELIOS UGR



**22** **BASIC**  
VALO MINI



**24** **BASIC**  
VALO CCT



**26** **PRO**  
RTF MINI PRO

# The fundamentals device in lighting project

## The Fundamentals

in any type of installation

**BASIC** **LESELI SC**

Diffuse lighting, 4 sizes, 3 light colours for each, 110° wide beam: a range that meets all requirements up to 2600 lumens of real output.

**PRO** **HELIOS UGR + 80° LENS**

The HELIOS UGR range, luminaires with recessed source: a wide choice in the UGR version. Two luminaires in one with the 80° lens option: one luminaire, several optical solutions.



## Practicality of management

and great savings



The choice of colour temperature from the driver 3000K / 4000K / 6000K allows a significant reduction in stock! Find out all versions, IP65 also.

# Tecnology and Quality

## Slim products

for every space requirement

**BASIC** LESELI DS SLIM

**PRO** RTF100  
RTF100 L2

Low-thickness is the equipment?  
Choose BASIC models with LESELI SLIM DS,  
in round or square versions or the PRO models  
with the RTF 100 range: finned aluminium body,  
choice of power in the two shapes, round and  
square, and long service life, 50,000h.



## Replacing MR16 lamps

all the power of LEDs

**BASIC** VALO MINI

**BASIC** VALO  
MINI CCT

**PRO** RTF  
MINI PRO



Two ranges, BASIC and PRO, to meet 'small cut hole' requirements  
Essential design that can be used in a variety of installation as a replacement for halogen  
MR16.

Visit the site [duralamp.com](http://duralamp.com)  
to stay updated on all the news  
and on the evolution of our products!



Downlights  
**LESELI SC**



**12W**

Ø125mm



**22W/30W**

Ø195mm



DRIVER OUTSIDE

**30W**



**FLICKER  
FREE** 

Providing greater visual comfort,  
improved definition of detail and  
reduction of stress.



Download photometries  
[www.duralamp.com](http://www.duralamp.com)

**REAL LUMENS**

Luminous Flux Data is REAL. Values are measured on actual use conditions.  
Nominal values of the LED source are not stated.

# Downlights

## LESELI SC

**TYOPOLOGY**

LED source with SMD technology and high efficiency chip integrated into a recessed luminaire.

**FEATURES**

Soft satin effect polycarbonate anti-glare diffuser.  
Built-in driver, except on the #W model, where it is remote.

**INSTALLATION**

Complete with springs for easy fastening into false ceilings.  
Connection to the mains with terminal block.

**MATERIAL**


Thermally conductive body; extremely light and manageable.

**POWER SUPPLY**

The driver is included in all models except the HP version, which features a remote driver.

**NOTES**

Providing greater visual comfort, improved definition of detail and reduction of stress.



<b>BASIC</b>	220-240 Vac	Ra 80		25000 h L70B20	IP20 VI IP43 VO	-25°C +35°C	Risk Group 0		110°	
--------------	-------------	-------	---	----------------	-----------------	-------------	--------------	---	------	---

W	lm	CD	K		PF			H		ART.
12	1000	350	3000	110°	0.9	150	166	54	1 / 20	<b>DT40L130</b>
12	1050	365	4000	110°	0.9	150	166	54	1 / 20	<b>DT40L140</b>
12	1050	365	6000	110°	0.9	150	166	54	1 / 20	<b>DT40L160</b>
22	2000	700	3000	110°	0.9	195	216	58	1 / 10	<b>DT80L130</b>
22	2050	715	4000	110°	0.9	195	216	58	1 / 10	<b>DT80L140</b>
22	2050	715	6000	110°	0.9	195	216	58	1 / 10	<b>DT80L160</b>
30	2600	910	3000	110°	0.9	195	216	58	1 / 10	<b>DT80L1HP30</b>
30	2600	910	4000	110°	0.9	195	216	58	1 / 10	<b>DT80L1HP40</b>
30	2600	910	6000	110°	0.9	195	216	58	1 / 10	<b>DT80L1HP60</b>

Downlights  
**LESELI CCT**

**FLICKER  
FREE** 


Providing greater visual comfort,  
improved definition of detail and  
reduction of stress.



**12W**  
Ø125mm



**22W/30W**  
Ø200mm

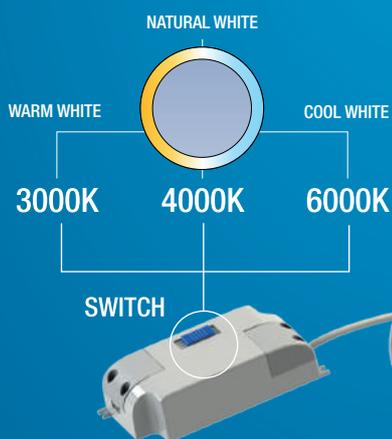

**REAL LUMENS**

Luminous Flux Data is REAL. Values are measured on actual use conditions.  
Nominal values of the LED source are not stated.



# Downlights

## LESELI CCT

**TYOLOGY**

LED source with SMD technology and high efficiency chip integrated into a recessed luminaire.  
Luminaire with the possibility of selecting the colour temperature at the time of installation.

**FEATURES**

Soft satin effect polycarbonate anti-glare diffuser.  
Remote power supply equipped with a dip-switch to select the colour temperature.

**INSTALLATION**


Complete with springs for easy fastening into false ceilings.  
Connection to the mains with terminal block.

**MATERIAL**

Thermally conductive body; extremely light and manageable.

**NOTES**

Providing greater visual comfort, improved definition of detail and reduction of stress.  
The flux data indicated refers to the 4000K colour temperature.



<b>BASIC</b>	220-240 Vac	Ra >80		25000 h L70B20	IP20 VI IP43 VO	-25°C +35°C	Risk Group 1		110°	
--------------	-------------	--------	---	----------------	-----------------	-------------	--------------	---	------	---

W	lm	CD	K		PF			H		ART.
12	1200	430	3000-4000-6000	110°	0,5	125	140	54	1 / 30	<b>DT40L1CCT</b>
22	2200	770	3000-4000-6000	110°	0,5	200	216	58	1 / 10	<b>DT80L1CCT</b>
30	3000	1050	3000-4000-6000	110°	0,9	200	216	58	1 / 10	<b>DT80L1CCTHP</b>

Downlights

# LESELI SLIM DS

**FLICKER  
FREE** 

Providing greater visual comfort,  
improved definition of detail and  
reduction of stress.



**6W**  
Ø105mm




**12W**  
Ø203mm




**22W/30W**  
Ø280mm



**6W**  
105X105mm

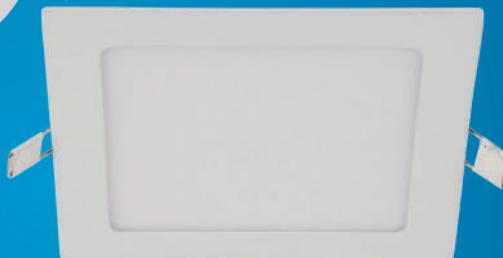

**18W**  
203X203mm

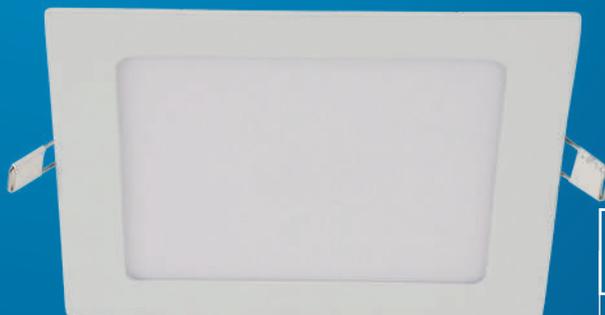

**24W**  
280X280mm



Download photometries  
[www.duralamp.com](http://www.duralamp.com)

## REAL LUMENS

Luminous Flux Data is REAL. Values are measured on actual use conditions.  
Nominal values of the LED source are not stated.

## Downlights

# LESELI SLIM DS

### TPOLOGY

LED source with SMD technology and high efficiency chip integrated into a recessed luminaire. External driver included in the package.

### FEATURES

Downlights with extremely limited width and remote driver.

### INSTALLATION


Complete with springs for easy fastening into false ceilings. Connection to mains with free wires.

### MATERIAL

High dissipation die-cast aluminum body with anti-yellowing PC screen. White ring.

### NOTES

Providing greater visual comfort, improved definition of detail and reduction of stress.

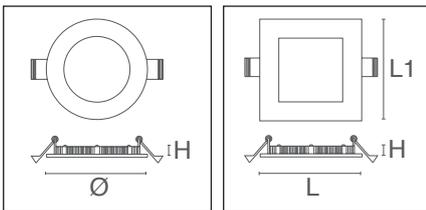

<b>BASIC</b>	220-240 Vac	Ra >80		15000 h L70B20	IP20 VI IP43 VO	-25°C +35°C	Risk Group 0		120°	
--------------	-------------	--------	--	----------------	-----------------	-------------	--------------	--	------	--

### LESELI SLIM DS - ROUND

W	lm	CD	K		PF			H		ART.
6	310	88	3000	120°	0.5	105	120	8.5	1 / 40	<b>DS04L130T</b>
6	330	93	4000	120°	0.5	105	120	8.5	1 / 40	<b>DS04L140T</b>
6	350	99	6000	120°	0.5	105	120	8.5	1 / 40	<b>DS04L160T</b>
18	1230	340	3000	120°	0.5	203	225	8.5	1 / 20	<b>DS08L130T</b>
18	1300	360	4000	120°	0.5	203	225	8.5	1 / 20	<b>DS08L140T</b>
18	1360	378	6000	120°	0.5	203	225	8.5	1 / 20	<b>DS08L160T</b>
24	1710	475	3000	120°	0.5	280	295	8.5	1 / 10	<b>DS10L130T</b>
24	1800	500	4000	120°	0.5	280	295	8.5	1 / 10	<b>DS10L140T</b>
24	1890	525	6000	120°	0.5	280	295	8.5	1 / 10	<b>DS10L160T</b>

### LESELI SLIM DS - SQUARE

W	lm	CD	K		PF		L	L1	H		ART.
6	310	88	3000	120°	0.5	105x105	120	120	8.5	1 / 40	<b>DS04L130Q</b>
6	330	93	4000	120°	0.5	105x105	120	120	8.5	1 / 40	<b>DS04L140Q</b>
6	350	99	6000	120°	0.5	105x105	120	120	8.5	1 / 40	<b>DS04L160Q</b>
18	1230	340	3000	120°	0.5	203x203	225	225	8.5	1 / 20	<b>DS08L130Q</b>
18	1300	360	4000	120°	0.5	203x203	225	225	8.5	1 / 20	<b>DS08L140Q</b>
18	1360	378	6000	120°	0.5	203x203	225	225	8.5	1 / 20	<b>DS08L160Q</b>
24	1710	475	3000	120°	0.5	277x277	290	290	8.5	1 / 10	<b>DS10L130Q</b>
24	1800	500	4000	120°	0.5	277x277	290	290	8.5	1 / 10	<b>DS10L140Q</b>
24	1890	525	6000	120°	0.5	277x277	290	290	8.5	1 / 10	<b>DS10L160Q</b>

Downlights  
**RTF100**

**FLICKER  
FREE** 

Providing greater visual comfort,  
improved definition of detail and  
reduction of stress.



**7W**  
Ø75mm



**14W**  
Ø120mm



**24W**  
Ø195mm



**7W**  
75X75mm



**14W**  
120X120mm



**24W**  
195X195mm



**REAL LUMENS**

Luminous Flux Data is REAL. Values are measured on actual use conditions.  
Nominal values of the LED source are not stated.

## Downlights RTF100

### TYOLOGY

LED source with SMD technology and high efficiency chip integrated into a recessed luminaire.  
External driver included in the package.  
Low thickness.

### FEATURES

Aluminium finned body for best heat dissipation.

### INSTALLATION

Complete with springs for easy fastening into false ceilings.

### MATERIAL

Die-cast aluminium body.

### USAGE INFORMATION


Can be used with multi-current dimming power supply, code DELT40D-M.

### EMERGENCY

Can be used with standby emergency kit, code KTEMR03.

### NOTES

Providing greater visual comfort, improved definition of detail and reduction of stress.

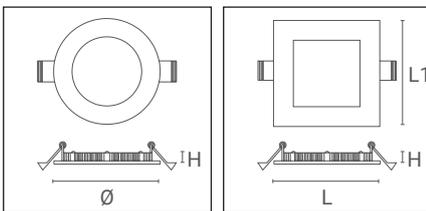

<b>PRO</b>	220-240 Vac	Ra 90		50000 h L80B20	IP20 VI IP43 VO	-25°C +35°C	Risk Group 0		110°	
------------	-------------	-------	--	-------------------	--------------------	----------------	-----------------	--	------	--

### RTF100 - ROUND

W	lm	CD	K		PF			H		ART.
7	600	290	3000	110°	0.5	75±5	100	24	1 / 10	RTF03L130T ▼
7	630	305	4000	110°	0.5	75±5	100	24	1 / 10	RTF03L140T ▼
7	660	320	6000	110°	0.5	75±5	100	24	1 / 10	RTF03L160T ▼
14	1195	585	3000	110°	0.5	120±5	145	26	1 / 10	RTF04L130T ▼
14	1260	615	4000	110°	0.5	120±5	145	26	1 / 10	RTF04L140T ▼
14	1325	645	6000	110°	0.5	120±5	145	26	1 / 10	RTF04L160T ▼
24	2185	965	3000	110°	0.95	190±5	225	35	1 / 5	RTF08L130T ▼
24	2300	1015	4000	110°	0.95	190±5	225	35	1 / 5	RTF08L140T ▼
24	2415	1065	6000	110°	0.95	190±5	225	35	1 / 5	RTF08L160T ▼

▼ To be discontinued.

### RTF100 - SQUARE

W	lm	CD	K		PF		L	L1	H		ART.
7	630	310	3000	110°	0.5	75x75	100	100	24	1 / 10	RTF03L130Q
7	665	325	4000	110°	0.5	75x75	100	100	24	1 / 10	RTF03L140Q
7	700	340	6000	110°	0.5	75x75	100	100	24	1 / 10	RTF03L160Q
14	1260	615	3000	110°	0.5	120x120	145	145	26	1 / 10	RTF04L130Q
14	1325	645	4000	110°	0.5	120x120	145	145	26	1 / 10	RTF04L140Q
14	1390	675	6000	110°	0.5	120x120	145	145	26	1 / 10	RTF04L160Q
24	2185	965	3000	110°	0.95	195x195	225	225	26	1 / 5	RTF08L130Q
24	2300	1015	4000	110°	0.95	195x195	225	225	26	1 / 5	RTF08L140Q
24	2415	1065	6000	110°	0.95	195x195	225	225	26	1 / 5	RTF08L160Q

Downlights  
**RTF100 L2**

**FLICKER  
FREE** 

Providing greater visual comfort,  
improved definition of detail and  
reduction of stress.



**7W**  
Ø80mm



**14W**  
Ø125mm



**24W**  
Ø200mm



Download photometries  
[www.duralamp.com](http://www.duralamp.com)

**REAL LUMENS**

Luminous Flux Data is REAL. Values are measured on actual use conditions.  
Nominal values of the LED source are not stated.

## Downlights RTF100 L2

### TYOLOGY

LED source with SMD technology and high efficiency chip integrated into a recessed luminaire.

Wide range: 110-240V.

External driver included in the package.

Uniform thickness for all powers.

### FEATURES

Knurled aluminium body for better heat dissipation.

### INSTALLATION


Complete with springs for easy fastening into false ceilings.

### MATERIAL

Die-cast aluminium body.

### NOTES

Providing greater visual comfort, improved definition of detail and reduction of stress.



<b>PRO</b>	100-240 Vac	Ra 90		50000 h L70B20	IP20 VI IP43 VO	-25°C +35°C	Risk Group 0		 110°	
------------	----------------	-------	---	-------------------	--------------------	----------------	-----------------	---	---	---

### RTF100 - ROUND L2

	W	Im	CD	K		PF			H		ART.
New	7	600	290	3000	110°	0.9	80	100	27	1 / 30	RTF03L230T
New	7	630	305	4000	110°	0.9	80	100	27	1 / 30	RTF03L240T
New	14	1195	585	3000	110°	0.9	125	145	27	1 / 30	RTF04L230T
New	14	1260	615	4000	110°	0.9	125	145	27	1 / 30	RTF04L240T
New	24	2185	965	3000	110°	0.9	200	225	27	1 / 30	RTF08L230T
New	24	2300	1015	4000	110°	0.9	200	225	27	1 / 30	RTF08L240T

Downlights  
**RTF CCT IP65**

**FLICKER  
FREE** 

Providing greater visual comfort,  
improved definition of detail and  
reduction of stress.




**7W**  
Ø85mm



**14W**  
Ø120mm



**32W**  
Ø200mm

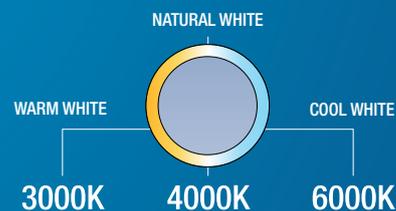

SWITCH



Download photometries  
[www.duralamp.com](http://www.duralamp.com)

**REAL LUMENS**

Luminous Flux Data is REAL. Values are measured on actual use conditions.  
Nominal values of the LED source are not stated.

# Downlights

## RTF CCT IP65

**TPOLOGY**

High-efficiency SMD LED sources integrated in an IP65 recessed luminaire, Ra>90, 50000 hours, with selectable light colour.

**FEATURES**

Family declined in 3 powers and sizes.  
Dip-switch for colour temperature selection located on the luminaire body. Remote driver included  
Soft satin effect polycarbonate anti-glare diffuser.  
Flicker Free.

**INSTALLATION**


Complete with springs for easy fastening into false ceilings.

**MATERIAL**

Die-cast aluminium body.

**NOTES**

Providing greater visual comfort, improved definition of detail and reduction of stress.  
The lumen and power data indicated refers to the 4000K colour temperature.



<b>PRO</b>	220-240 Vac	Ra 90		50000 h L70B20	IP65	-25°C +35°C	Risk Group 1		 100°	
------------	-------------	-------	---	----------------	------	----------------	--------------	---	---	---

W	lm	CD	K		PF			H		ART.
7	700	310	3000-4000-6000	100°	0.5	85	100	38	1 / 40	<b>RTF03L2EXCCT</b>
14	1400	540	3000-4000-6000	100°	0.5	120	140	38	1 / 40	<b>RTF04L2EXCCT</b>
32	3200	1400	3000-4000-6000	100°	0.9	200	230	48	1 / 20	<b>RTF08L2EXCCT</b>

Downlights  
**REFL CCT**

**FLICKER FREE**

Providing greater visual comfort, improved definition of detail and reduction of stress.



**12W**  
Ø90mm




**20W-30W**  
Ø125mm




● Remote driver



**50W**  
Ø200mm

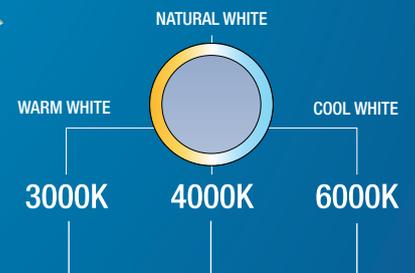

Ø 100mm    3"  
Ø 135mm    4"  
Ø 215mm    8"

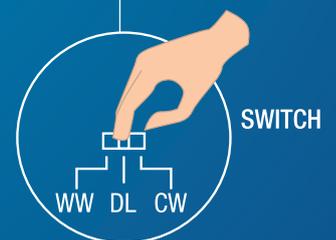

**REAL LUMENS**

Luminous Flux Data is REAL. Values are measured on actual use conditions. Nominal values of the LED source are not stated.

## Downlights REFL CCT

### TYOLOGY

High-efficiency COB LED sources integrated in a recessed luminaire, Ra>90, 50000 hours, with selectable light colour. UGR >19.

Remote driver included.

### FEATURES

Family declined in 4 power ratings and 3 standard sizes. Dip-switch for colour temperature selection located on the luminaire body.

Protective diffuser screen.

### INSTALLATION

Complete with springs for easy fastening into false ceilings.


### MATERIAL

Die-cast aluminium body.

### NOTES

Providing greater visual comfort, improved definition of detail and reduction of stress.

The flux data indicated refers to the 4000K colour temperature.



<b>PRO</b>	220-240 Vac	Ra 90		50000 h L70B20	IP20 VI IP43 VO	-25°C +35°C	Risk Group 1	UGR <19		55°	
------------	-------------	-------	---	----------------	-----------------	-------------	--------------	---------	---	-----	---

W	lm	CD	K		UGR	PF			H		ART.
12	1100	1400	3000-4000-6000	55°	<19	0.5	90	100	70	1 / 30	<b>DR03L1-CCT</b>
20	1800	3515	3000-4000-6000	55°	<19	0,5	125	135	96	1 / 12	<b>DR04L2-CCT</b>
30	2760	2170	3000-4000-6000	55°	<19	0.9	125	135	96	1 / 12	<b>DR04L1-CCT</b>
50	4600	4906	3000-4000-6000	55°	<19	0.9	200	215	135	1 / 8	<b>DR08L1-CCT</b>

Downlights  
**HELIOS UGR**

**FLICKER  
FREE** 

Providing greater visual comfort,  
improved definition of detail and  
reduction of stress.



UGR<19

**9W**

Ø65mm



UGR<15

**14W**

Ø100mm



UGR<11

**28W**

Ø150mm



DISCOVER PERFORMANCE WITH  
THE 80° LENS:



UGR<13

**37W**

Ø200mm



IDEAL REPLACEMENT FOR EXISTING FITTINGS USING HALOGEN LAMPS.



Download photometries  
[www.duralamp.com](http://www.duralamp.com)

**REAL LUMENS**

Luminous Flux Data is REAL. Values are measured on actual use conditions.  
Nominal values of the LED source are not stated.

## Downlights HELIOS UGR

### TPOLOGY

LED source with COB technology and an integrated high efficiency chip in a low glare UGR recessed light fixture.

Remote driver.

### FEATURES

The deep recess of the light source combined with the advanced lens technology ensures glare ratings from UGR<11 to UGR<19, applications include offices or places of work where computer screens are used and low glare is essential.

A sealed light source provides easy maintenance and cleaning.

### INSTALLATION

Complete with springs for easy fastening into false ceilings.

### MATERIAL

Aluminium body; extremely light and easy to manoeuvre.

### USAGE INFORMATION


HELIOS UGR 14W/28W and 37W: can be used with multi-current dimming power supply, code DELT40D-M.

### EMERGENCY

Can be used with standby emergency kit, code KTEMR03.

### NOTES


Providing greater visual comfort, improved definition of detail and reduction of stress.



<b>PRO</b>	220-240 Vac	Ra >90		50000 h L80B20	IP20 VI IP43 VO	-25°C +45°C	Risk Group 1		 36°	
------------	-------------	--------	---	-------------------	--------------------	----------------	--------------	---	---	---

W	lm	CD	K		PF			H		ART.
9	850	1820	3000	36°	0,95	65	82	53	1 / 50	DH25L130
9	850	1820	4000	36°	0,95	65	82	53	1 / 50	DH25L140
14	1450	3800	3000	36°	0,95	100	118	60	1 / 50	DH40L130
14	1450	3800	4000	36°	0,95	100	118	60	1 / 50	DH40L140
28	2800	7250	3000	36°	0,95	150	172	98	1 / 4	DH60L130
28	2800	7250	4000	36°	0,95	150	172	98	1 / 4	DH60L140
37	3700	10300	3000	36°	0,95	200	230	128	1 / 4	DH80L130
37	3700	10300	4000	36°	0,95	200	230	128	1 / 4	DH80L140

### 80° LENS FOR HELIOS DOWNLIGHT



		ART.
80° beam lenses diameter 82	1 / 5	KTDH25-LENS
80° beam lenses diameter 118	1 / 5	KTDH40-LENS
80° beam lenses diameter 172	1 / 5	KTDH60-LENS
80° beam lenses diameter 230	1 / 5	KTDH80-LENS

The frosted lens fits between the reflector and the source to achieve a wider beam.  
Quick and easy assembly.  
5 pcs set.


Downlights  
**VALO MINI**

**FLICKER  
FREE** 

Providing greater visual comfort,  
improved definition of detail and  
reduction of stress.



**7W**  
Ø72mm



Download photometries  
[www.duralamp.com](http://www.duralamp.com)

**REAL LUMENS**

Luminous Flux Data is REAL. Values are measured on actual use conditions.  
Nominal values of the LED source are not stated.

# Downlights

## VALO MINI

**TPOLOGY**

Compact adjustable LED downlight with integrated driver.

**FEATURES**

Classic spot with 75 mm cut-out and 40° aperture.

Available in warm and natural light versions.

Compact and easy to install.

Tilt Adjustability 30°.


Non removable built-in power supply.

**INSTALLATION**

Complete with springs for easy fastening into false ceilings.

**MATERIAL**

Heat resistant, anti-yellowing plastic body.



<b>BASIC</b>	220-240 Vac	Ra 80		15000 h L70B30	IP20 VI IP43 VO	-25°C +35°C	Risk Group 0		 40°	
--------------	-------------	-------	---	----------------	-----------------	-------------	--------------	---	---	---

**VALO MINI - ROUND**

W	lm	CD	K		PF			H		ART.
7	620	700	3000	40°	0.5	72	90	40	10 / 40	<b>VA03L130T</b>
7	650	735	4000	40°	0.5	72	90	40	10 / 40	<b>VA03L140T</b>

Downlights  
**VALO CCT**

**FLICKER  
FREE** 


Providing greater visual comfort,  
improved definition of detail and  
reduction of stress.



**7W**  
Ø70mm



**7W**  
70x70

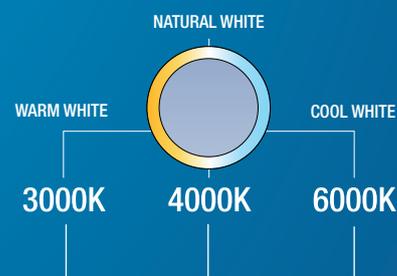

**REAL LUMENS**

Luminous Flux Data is REAL. Values are measured on actual use conditions.  
Nominal values of the LED source are not stated.

## Downlights VALO CCT

**TPOLOGY**

Compact adjustable LED downlight with integrated driver and colour temperature selection function.

**FEATURES**

Compact and easy to install.  
Tilt Adjustability 30°.

**INSTALLATION**


Complete with springs for easy fastening into false ceilings.

**MATERIAL**

Heat resistant, anti-yellowing plastic body.

**NOTES**

The flux data indicated refers to the 4000K colour temperature.

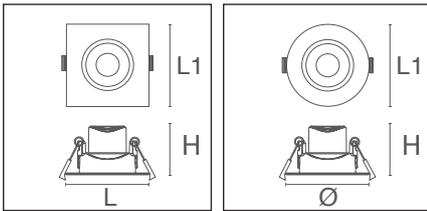

<b>BASIC</b>	220-240 Vac	Ra >80		15000 h L70B20	IP20 VI IP43 VO	-25°C +35°C	Risk Group 1		 50°	
--------------	-------------	--------	---	----------------	-----------------	-------------	--------------	--	---	---

### VALO CCT ROUND

<b>W</b>	<b>lm</b>	<b>CD</b>	<b>K</b>		<b>PF</b>			<b>H</b>		<b>ART.</b>
New 7	600	570	3000-4000-6500	50°	0,5	70	85	39	10 / 10	VA03L1CCTT

### VALO CCT SQUARE

<b>W</b>	<b>lm</b>	<b>CD</b>	<b>K</b>		<b>PF</b>		<b>L</b>	<b>L1</b>	<b>H</b>		<b>ART.</b>
New 7	600	570	3000-4000-6500	50°	0,5	70x70	85	85	39	10 / 10	VA03L1CCTQ

Downlights


## RTF MINI PRO

**FLICKER  
FREE** 

Providing greater visual comfort,  
improved definition of detail and  
reduction of stress.



**7W**  
Ø75mm



Download photometries  
[www.duralamp.com](http://www.duralamp.com)

### REAL LUMENS

Luminous Flux Data is REAL. Values are measured on actual use conditions.  
Nominal values of the LED source are not stated.

# Downlights

## RTF MINI PRO

**TPOLOGY**

Recessed LED fixtures with built-in driver.  
Flicker Free.

**FEATURES**


Adjustable dichroic effect optics.  
Tilt Adjustability 30°.  
Special design of the lens ensures excellent light beam diffusion.  
Compact and easy to install.

**INSTALLATION**

Complete with springs for easy fastening into false ceilings.

**MATERIAL**

Die-cast aluminium body for better heat dissipation.  
Heat-resistant PC outer ring.



<b>PRO</b>	220-240 Vac	Ra >80		50000 h L70B20	IP20 VI IP43 VO	-25°C +35°C	Risk Group 1		 36°	
------------	-------------	--------	--	----------------	-----------------	-------------	--------------	---	--	--

	W	lm	CD	K		PF			H		ART.
New	7	570	1030	3000	36°	0,5	75	90	62	1 / 60	<b>RTF03L530T</b>
New	7	600	1090	4000	36°	0,5	75	90	62	1 / 60	<b>RTF03L540T</b>



DT40L130	7	RTF03L140Q	13
DT40L140	7	RTF03L160Q	13
DT40L160	7	RTF04L130Q	13
DT80L130	7	RTF04L140Q	13
DT80L140	7	RTF04L160Q	13
DT80L160	7	RTF08L130Q	13
DT80L1HP30	7	RTF08L140Q	13
DT80L1HP40	7	RTF08L160Q	13
DT80L1HP60	7	RTF03L230T	15
DT40L1CCT	9	RTF03L240T	15
DT80L1CCT	9	RTF04L230T	15
DT80L1CCTHP	9	RTF04L240T	15
DS04L130T	11	RTF08L230T	15
DS04L140T	11	RTF08L240T	15
DS04L160T	11	RTF03L2EXCCT	17
DS08L130T	11	RTF04L2EXCCT	17
DS08L140T	11	RTF08L2EXCCT	17
DS08L160T	11	DR03L1-CCT	19
DS10L130T	11	DR04L2-CCT	19
DS10L140T	11	DR04L1-CCT	19
DS10L160T	11	DR08L1-CCT	19
DS04L130Q	11	DH25L130	21
DS04L140Q	11	DH25L140	21
DS04L160Q	11	DH40L130	21
DS08L130Q	11	DH40L140	21
DS08L140Q	11	DH60L130	21
DS08L160Q	11	DH60L140	21
DS10L130Q	11	DH80L130	21
DS10L140Q	11	DH80L140	21
DS10L160Q	11	KTDH25-LENS	21
RTF03L130T	13	KTDH40-LENS	21
RTF03L140T	13	KTDH60-LENS	21
RTF03L160T	13	KTDH80-LENS	21
RTF04L130T	13	VA03L130T	23
RTF04L140T	13	VA03L140T	23
RTF04L160T	13	VA03L1CCTT	25
RTF08L130T	13	VA03L1CCTQ	25
RTF08L140T	13	RTF03L530T	27
RTF08L160T	13	RTF03L540T	27
RTF03L130Q	13		



## 1. Applicability

1.1 These general conditions (hereafter the "Conditions") constitute an integral and essential part of the contract of sale between the Parties. The Conditions shall regulate all legal relationships between Dura Lamp Srl (hereafter "Dura Lamp") and the purchaser (hereafter the "Purchaser") where the said relationships are not disciplined by the applicable terms of the Italian Civil Code (C.C.). The nullity of any of the terms of these Conditions shall not prejudice the validity of the remaining Conditions or the Contract.

1.2 Any changes to these Conditions shall be agreed between the Parties in writing, with the exception of the provisions set down in article 1341 of the Italian C.C..

## 2. Sales

2.1 Sale requests for the products (hereafter the "Products") shall be accepted 'subject to the seller's approval' and shall be considered to be irrevocable in accordance with and as an effect of article 1329 of the C.C. for a period of 1 (one) month from the date of the order requesting execution without prior acknowledgement, pursuant to and as an effect of article 1327 of the C.C. from the date on which the order is received by Dura Lamp.

2.2 The Products detailed in the individual orders and the relevant accessories shall be supplied to the Purchaser by Dura Lamp with "Retention of Title" pursuant to and as an effect of articles 1523-1526 of the Italian C.C. In this case, the transfer of ownership of the Products to the Purchaser shall take place exclusively upon the full payment of the price agreed, whilst any risks shall be the responsibility of the Purchaser from the moment of delivery of the Products.

2.3 Whilst confirming the terms stated above, the Parties hereby agree that should the Products and relevant accessories be destroyed for causes not attributable to Dura Lamp, the Purchaser shall not be released from the obligation to pay for the same, even where the Products have not yet been delivered.

## 3. Prices

3.1 The prices detailed on the price list shall be applied to Product sales orders. The aforementioned prices shall be unit prices per single item, except where stated otherwise for certain Products. The Parties shall have the right to agree, in writing, any derogations and/or special conditions of sale.

3.2 Moreover, the Parties hereby agree that the following conditions shall be applied:

- (I) Minimum order: € 300 (three hundred) for Italy - € 750 (seven hundred and fifty) for other countries;
- (II) Delivery free to destination in Italy for orders of € 300 (three hundred) for Italy or more;
- (III) Ex-Works deliveries for other countries.

3.3 The prices given above do not include VAT and installation costs.

3.4 The prices provided in this catalogue shall be valid until a new price list is published.

## 4. Currency

All prices are given in Euros (exclusive of VAT). Invoices shall be drawn up in Euros.

## 5. Special requests

Products can be supplied to the Purchaser in non-standard colours and with special features. The relevant price, minimum quantities per order, methods and timing of deliveries shall be agreed in each individual case, in relation to the reference order.

## 6. Transport

6.1 Dura Lamp shall not be liable for any damage and/or losses which may occur during the transportation of the Products, unless the Products are delivered free at destination.

6.2 Dura Lamp shall have the right to establish the method of transportation to be used for the Products, unless the Parties have previously established a method of transport in writing.

6.3 Upon delivery, the Purchaser shall undertake to verify the condition of the products and shall make any complaints directly to the carrier and/or conduct any actions necessary in the event of loss, misplacement, removal or damage, or delays in transportation and/or the methods of delivery of the Products.

## 7. Complaints

7.1 In the event that the Products are found to have any faults and/or defects, the Purchaser shall undertake to notify Dura Lamp of the same in writing, by means of a registered letter, no later than 8 (eight) days following the discovery of the said faults and/or defects, at the risk of invalidating the obligations of the guarantee provided by Dura Lamp. In this case, the faulty Products, which should be reported within the terms established, should be returned to Dura Lamp, once the Purchaser has received specific permission to do so in writing.

7.2 In the event that the Purchaser's complaints are held to be valid, Dura Lamp, at its complete discretion, may make the necessary repairs and/or replace the Products, excluding the attribution of any further charges, obligations, indemnification or compensation to the same. The Products in question should be returned to the Dura Lamp Srl plant in Via Pratese 164, 50145, Firenze, Italy. In the event that, following an inspection by Dura Lamp, the Products returned by the Purchaser are not found to be faulty and/or defective, Dura Lamp shall return the Products to the Purchaser, charging the same an amount equal to 15% (fifteen percent) of the value of the said Products.

## 8. Delivery

8.1 The Parties hereby agree that the terms established for the delivery of the Products shall not be considered absolute or essential and that, in any case, each item shall be exclusively in favor of Dura Lamp, unless otherwise agreed in writing between the Parties.

8.2 In the event of delayed delivery, once 15 (fifteen) days have passed since the agreed date, the Purchaser may send Dura Lamp written warning to complete the delivery within a further term of no more than 15 (fifteen) days from receipt of the same. In the event that Dura Lamp has not completed the delivery within this further term the Purchaser may withdraw from the order with regard to the Products that have not yet been delivered. In this case the Purchaser shall only be obliged to pay Dura Lamp for the Products actually delivered, excluding the payment of any further indemnification and/or compensation to the Purchaser.

8.3 Dura Lamp shall not be responsible for any other breaches, including the failure to deliver or delayed delivery of the Products, caused by events outside its reasonable control such as, purely by way of an example and not limited to the same: the failure to deliver or delayed delivery of manufacturing materials by Dura Lamp's suppliers, equipment breakdowns, strikes and other trade union action, electricity blackouts, suspension of or difficulties with transportation.

## 9. Payment

9.1 The price due shall be paid by the Purchaser according to the conditions and modalities set down in the order and, in any case, by means of payments made exclusively to "DURA LAMP Srl".

9.2 Dura Lamp shall only recognize the validity of the payments when the same are made in compliance with the provisions of article 9.1 above. This means that amounts paid using any other method shall not be considered to be a payment in discharge of the Purchaser's obligations. The eventual acceptance by Dura Lamp of a bank draft or other trade bill shall only occur with the application of the proviso "under usual reserve".

9.3 In the event of delayed payment with respect to the terms agreed, the Parties hereby agree that bank interest shall be due to Dura Lamp at the current PRIME RATE increased by 3 points. interest shall be applied as of right, with no obligation for Dura Lamp to send the Purchaser a formal notice to pay.

9.4 Moreover, in the event of a delay in payment of more than 15 (fifteen) days, Dura Lamp shall have the right to terminate the order as of right pursuant to article 1456 C.C., sending written notification of the same, barring compensation for any damage.

9.5 In the event that the Parties have agreed upon a method of payment by instalments for the Products, the failure to pay several instalments or just one instalment exceeding one eighth of the overall price of the Products, shall result in the loss of the Purchaser's right to pay in instalments and shall give Dura Lamp the right to request the remaining balance of the price or, alternatively, at its own discretion, to terminate the contract with immediate return of the Products and the acquisition of the instalments paid, as indemnification, barring the right to compensation for any damage sustained.

## 10. Guarantee

10.1 The Products provided by Dura Lamp shall be guaranteed for a period of 12 (twelve) months from the date of delivery against any manufacturing or material defects and/or faults and against any breakdowns not attributable to the Purchaser. Dura Lamp's only obligation and the Purchaser's right with regard to claims related to the guarantee shall be limited, as decided by Dura Lamp, to the replacement or repair of the defective or non-compliant product or the reimbursement of the price for the purchase of another product. Dura Lamp shall be granted a reasonable amount of time to repair or replace the product, or to make the previously authorized reimbursement. Any defective or non-compliant Products shall become the property of Dura Lamp as soon as they have been replaced or reimbursed.

10.2 The guarantee shall exclude any failures due to circumstances beyond the control of Dura Lamp (lightning, flooding, etc.), as well as any damage caused by the improper use of the Products and/or relevant accessories. Notwithstanding the above, Dura Lamp shall not be bound by the guarantee if the contested defects or non-compliances have occurred as a result of submitting the Products to resistance or environmental tests, the incorrect use of the same, or in the event that the use of or conditions of use of the Products is different from that indicated in the instructions and technical information, as a result of negligence, incorrect installation or accident, or if they derive from improper repairs, alterations, modifications, storage or transportation or by incorrect handling.

10.3 The Purchaser shall send the Products returned in accordance with the terms of the guarantee to the place indicated by Dura Lamp in compliance with the Dura Lamp policy regarding authorization to return materials in force at the time. In the event that the Products returned are found to be compliant or not faulty, the Purchaser shall pay the cost of returning the same as well as the cost of insuring, inspecting and handling the Products.

10.4 LED products Enjoy specific guarantees: details are published on [www.duralamp.com](http://www.duralamp.com)

## 11. Limitation of Liability

11.1 With the sole exclusion of criminal intent and gross negligence, Dura Lamp shall not be liable for loss of profits or savings, loss of reputation or goodwill, any direct, indirect, consequential or special damage that may derive from or be connected to the contract or sale of products or services by Dura Lamp or by the use of the same of a contractual or extra-contractual nature or deriving from any other source, even where Dura Lamp has been notified of or is aware of the possibility of such damage.

11.2 The limitations and exclusions stated in article 11 shall apply within the limits permitted by law.

## 12. Applicable law and place of jurisdiction

12.1 These Conditions and all the effects of the same shall be governed by Italian law. The Parties hereby agree that any disputes related to these Conditions shall refer to Italian jurisdiction to the exclusion of all others.

12.2 The exclusive place of jurisdiction shall be the registered offices of Dura Lamp Srl, with the express exclusion of any other competing places of jurisdiction.



DURA LAMP S.r.l.  
Registered office Via Pratese, 164 – 50145 Firenze  
Tel. 055 894 881  
e-mail: duralamp@duralamp.it

Registered with the Florence Company Register -  
C.F. and VAT number 03312240488  
Registered with R.E.A. of Florence at n. 353287 Share capital € 400,000.00 i.v.  
Subject to the management and coordination of 3F FILIPPI Srl



A complete list of the Dura Lamp distribution  
and project network is available at:

[www.duralamp.com](http://www.duralamp.com)

**DURALAMP | UNICO** Catalogue 24/25

© Copyright 2024 - Dura Lamp S.r.l.

All data and pictures provided in this catalogue are for reference only: since they might change during mass production, they have to be considered nominal values with tolerances. Dura Lamp reserves the right to modify its products in any moment, for technical or commercial reasons.

Photos: Ivan Rossi - Studio Artale - Studio Ceccanti - Alessandro Maurelli - Luca Visentini

Graphic project: Lorenzetti Communication and FD Graphic Studio

Indoor or outdoor setting photos are used to illustrate the possible applications of the product.





[duralamp.com](https://duralamp.com)