



## DURANEONFLEX TOP

Uniform and flexible light

Ready-to-light

DuraNeonFlex is a flexible extruded silicone profile, complete with 120 LEDs per meter strip.

The narrow pitch of the chips and Integrated Circuit technology make DNF a perfect light line, homogenous on all its 10 meters of length.

What's best ... it is ready-to-light!

### Typology

Flexible light line with uniform emission in two directions depending on the model. The section of the profile can be rounded or squared.

Both models have a TOP and VERT versions.

### Features

Flexible light line with continuous lighting: so flexible you can create curves with a minimum diameter of 12 cm for VERT models.

TOP flex Version: the light is emitted on the upper side of the light channel.

VERT flex Version: vertical emission away from the bottom of the channel.

Anti-glare diffuser function.

Maximum length per single power supply: 10 metres.

### Installation

It is attached to the surface with the clips; it can be cut following the cutting marks (5cm).

Fitted with different outputs for power supply.

Installation temperature: 0° ~ 35°C; working temperature: -25° +35°C.

### Material

Extremely flexible, impact resistant and weatherproof extruded silicone.

Lifetime: internal use >50,000h; external use>35,000h

### Usage information

Dimmable 0-100%

DALI - DMX

Analogue and digital domotic control systems

Push Dali with ZKCOAFF controllers

CASAMBI compatible

### Packaging


Available to order with minimum quantities to be agreed on with the sales force.

DNF can be supplied at any specific length (max length 10 meters for single power supply, cut every 5 cm) with or without the electrical terminals or in 10 m and 50 m reels without terminals.

### Colour of the light

Range of white and pure colours both with 120 LED per meter.

RGB version available on DNF and DNF-Q models.

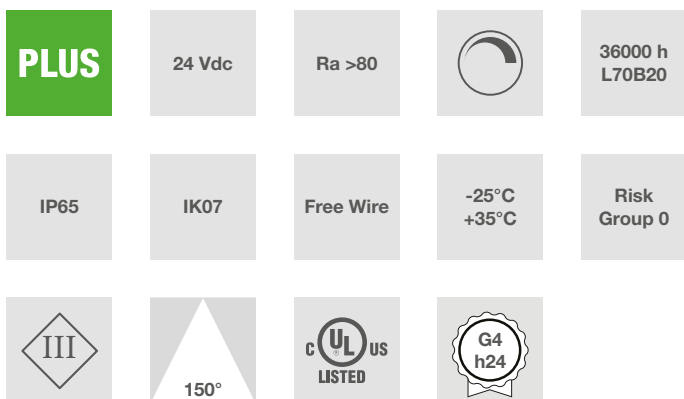

### Characteristic data

Power	140 W	Beam	150°	Dimmable	Yes	Input	24 Vdc
Base	Free Wire	IP	65	Flux	8000 lm	Tc	3000 K
Ra	>80	LED Warranty	G4h24	IK	IK07	RG	RG0

## Dimensional characteristics



L	10000 mm
L1	16 mm
H	15 mm

Cutting pitch	50 mm
LED pitch	50 mm


## Lighting and photometric features

Beam opening	150°
Nominal flux per mt	800 lm/m
Flux	8000 lm
CCT nominal colour temperature	3000 K
Colour of the light	Warm light
Colour rendering index	>80
Lifespan	36000 h
LED lifespan	L70B20
Trigger time	<0,2 s
Heating time up to 60% of full efficiency	Instant Full Light
Mercury	0 mg

## Electrical characteristics

Rated power	140 W
Input voltage	24 Vdc
Dimmable	Yes
Energy efficiency class	This product contains a light source of energy efficiency class "G"
Operating temperature	-25°C / +35°C
Operating position	360°

## Photometry

 <p>09UT241430-15 Hmax=235cd/klm</p>	3000K	H(m)	D1(m)	D2(m)	E <sub>max</sub> (lx)	
	Ra80		111°	162°		
	Fixture Power	14W	1	2.89	12.91	188
	Source Flux	800lm	2	5.79	25.81	47
	Fixture Flux	800lm	3	8.68	38.72	21
	Efficacy	57lm/W	4	11.57	51.63	12
	I <sub>max</sub>	188cd	5	14.47	64.54	8

EulumDat file on the site

## LED Warranty

G4h24	Full Guarantee 4 years (24h/24h) Without limitations on the duration of use for the first year, provided the observance of the installation conditions.
-------	---

## European Directives

2009/125/EC \* Ecodesign  
2011/65/EU \* RoHS  
2012/19/EU \* RAEE  
2014/30/EU \* EMC  
2015/863 \* Amending RoHS  
2017/1369 \* Regulation for Energy Labelling  
2019/2015 \* Regulation for Energy Labelling  
2019/2020 \* Regulation for Ecodesign  
2021/340 \* Amending Reg. Energy Labelling  
2021/341 \* Amending Reg. Ecodesign

## Product standards

CEI EN 55015:2020 (+A11:2020)  
CEI EN 60598-1:2022  
CEI EN 60598-2-1:2022  
CEI EN 61000-3-2:2019 (+A1:2021)  
CEI EN 61000-3-3:2014 (+EC1:2014/+EC2:2016/+A1:2021/+A2:2022)  
CEI EN 61547:2010  
CEI EN 62031:2021 (+A11:2022)  
CEI EN 62471:2010  
IEC/TR 62471-2:2009  
CEI EN 62493:2015  
CEI 34-141:2014

## Logistics data

Item net weight	2085 gr
Barcode single item	8011905908997
Minimum order quantity	1
Minimum packaging	1 / 1