

DURA

LAMP



DRIVER





Drivers / Controllers

Constant current drivers



6
CONSTANT
CURRENT DRIVERS

Dimmable constant current power supplies



7
DIMMABLE
CONSTANT
CURRENT POWER
SUPPLIES

Constant voltage drivers



9
DURASTRIP
DRIVERS IP20



10
DURASTRIP
DRIVERS IP65 /
IP67



12
CONSTANT
VOLTAGE LED
DRIVER

Dimmable constant voltage drivers



13
DURASTRIP
DRIVERS DALI



14
DURASTRIP
DRIVERS TRIAC/
LEADING EDGE

Drivers / Controllers

Control interfaces



15
CONTROL
INTERFACE

DIMMER TOUCH - DMX



18
TOUCH DIMMERS
- DMX

Emergency kit



20
EMERGENCY KIT

Electronic transformers for halogen lamps



21
ELECTRONIC
TRANSFORMERS FOR
HALOGEN LAMPS

Drivers / Controllers

Casambi accessories



22
CASAMBI
ACCESSORIES

Constant current drivers

CONSTANT CURRENT DRIVERS




A01484

A01485

220-240 Vac		100000 h	IP20	-20°C +45°C		SELV			
-------------	---	----------	------	----------------	---	------	---	---	---

MULTICURRENT DRIVER

W max Tot	Volt IN	I OUT	PF	L	L1	H		ART.
40	220-240 Vac	1000 mA	0.95	142	50	30	1 / 1	A01484
38	220-240 Vac	900 mA	0.95	142	50	30	1 / 1	A01485






Can be used with fittings with replaceable remote driver.
Suitable for use in a centralised power supply for emergency lighting.




ZKLP700EL

ZKLP600EL

ZKLP1400-EL

220-240 Vac		IP20	-25°C +45°C		SELV			
-------------	---	------	----------------	---	------	---	---	---

CONSTANT CURRENT DRIVER

W max Tot	Volt IN	I OUT	PF	L	L1	H		ART.
60	220-240 Vac	1400 mA	0,95	156	50	38	1 / 1	ZKLP1400-EL
31.5	220-240 Vac	750 mA	0,95	119	43	28	1 / 1	ZKLP700EL
39.9	220-240 Vac	600 mA	0,95	119	43	28	1 / 1	ZKLP600EL

Suitable for use in a centralised power supply for emergency lighting.

Dimmable constant current power supplies

DIMMABLE CONSTANT CURRENT POWER SUPPLIES



DELTA40D-M



DELTA65D-M




DELTA60D-D



DELTA40D-D

220-240
Vac

DALI MULTICURRENT DIMMABLE DRIVERS

W max Tot	Volt IN	I OUT	PF	L	L1	H		ART.
38	220-240 Vac	1050 mA	0,95	147	44	30	1 / 1	DELTA40D-M
60	220-240 Vac	2000 mA	0,95	129	76	30	1 / 1	DELTA65D-M
60	220-240 Vac	1400 mA	0.95	124	82	25	1 / 1	DELTA60D-D
42	220-240 Vac	1050 mA	0,97	123	82	23	1 / 1	DELTA40D-D ▼

DELTA40D-M code, DALI 2 - DALI Push, suitable for use in a centralised power supply for emergency lighting.


DELTA65D-M code, DALI 2 - 1-10V - DALI Push.

▼ To be discontinued.



220-240 Vac		100000 h	IP20	-20°C +45°C	SELV		EL		OSRAM 	
----------------	---	----------	------	----------------	------	---	----	--	---	---

MULTICURRENT DIMMABLE DRIVER 50W

W max Tot	Volt IN	I OUT	PF	L	L1	H		ART.
50	220-240 Vac	680	0.95	110	75	26	1 / 1	ZK600-14000S

DALI 2 - 1-10V - DALI Push

Suitable for use in a centralised power supply for emergency lighting.

Preset power supply for Slimflux CCT panels, 680mA OUT.


Dimmable constant current power supplies

DIMMABLE CONSTANT CURRENT POWER SUPPLIES



220-240 Vac		100000 h	IP20	-20°C +45°C		SELV			EL			
-------------	---	----------	------	----------------	---	------	---	--	----	---	---	---







MULTICURRENT DIMMABLE DRIVER 42W

W max Tot	Volt IN	I OUT	PF	L	L1	H		ART.
42	220-240 Vac	1100 mA	0.95	103	68.5	30.5	1 / 1	A01486


DALI 2 - DALI Push.

Suitable for use in a centralised power supply for emergency lighting.



220-240 Vac		IP20	-20°C +45°C		SELV				
-------------	---	------	----------------	---	------	---	---	--	---

MULTICURRENT 1-10V DIMMABLE DRIVER

W max Tot	Volt IN	I OUT	PF	L	L1	H		ART.
40	220-240 Vac	1050 mA	0,95	141	46	28	1 / 1	DELT40D-10V


Can be used with fittings with replaceable remote driver.

Constant voltage drivers

DURASTRIP DRIVERS IP20



DRIVER FOR DURASTRIP 24V

W	Volt IN	Volt OUT	PF	L	L1	H		ART.
50	110-260 Vac	24 Vdc	0,9	280	30	17	1 / 1	SLD-50-24
80	110-260 Vac	24 Vdc	0,9	320	30	17	1 / 1	SLD-80-24
150	110-260 Vac	24 Vdc	0,9	330	32	22	1 / 1	SLD-150-24

Constant voltage drivers

DURASTRIP DRIVERS IP65 / IP67




DRIVER FOR DURASTRIP 24V

	W	Volt IN	Volt OUT	PF	L	L1	H		ART.
	100	100-240 Vac	24 Vdc	0,9	140	63	32	1 / 1	XLG-100-24-A
New	120	100-240 Vac	24 Vdc	0,95	220	68	39	1 / 1	HLG-120H-24
	150	100-240 Vac	24 Vdc	0,9	180	63	35.5	1 / 1	XLG-150-24-A
	200	100-240 Vac	24 Vdc	0,9	199	63	35.5	1 / 1	XLG-200-24-A
	240	100-240 Vac	24 Vdc	0,9	244	71	38	1 / 1	ELG-240-24A-3Y
	320	100-240 Vac	24 Vdc	0,9	252	90	44	1 / 1	HLG-320H-24
	600	100-240 Vac	24 Vdc	0,9	280	144	49	1 / 1	HLG-600H-24A



DRIVER FOR DURASTRIP 48V

	W	Volt IN	Volt OUT	PF	L	L1	H		ART.
	320	100-240 Vac	48 Vdc	0,95	252	90	44	1 / 1	HLG-320H-48A


Constant voltage drivers

DURASTRIP DRIVERS IP65 / IP67



PRO	200-240 Vac	50000 h	IP67	-25°C +35°C		
------------	----------------	---------	------	----------------	---	---


DURASTRIP DRIVERS IP67

W	Volt IN	Volt OUT	PF	L	L1	H		ART.
200	200-240 Vac	24 Vdc	0,9	238	43	63	1 / 1	ZK73200 ▼


▼ To be discontinued.

Constant voltage drivers

CONSTANT VOLTAGE LED DRIVER



CONSTANT VOLTAGE LED DRIVER


W	Volt IN	Volt OUT	L	L1	H		ART.
20	200-240 Vac	12 Vdc	154	50	22	1 / 1	DELT20A-12 ▼

Transformers constant voltage output electronic LED power supply.

▼ To be discontinued.



ELECTRONIC POWER SUPPLY

W	Volt IN	Volt OUT	PF	L	L1	H		ART.
50	110-260 Vac	12 Vdc	0,9	280	30	17	1 / 1	SLD-50-12
80	110-260 Vac	12 Vdc	0,9	320	30	17	1 / 1	SLD-80-12


Transformers constant voltage output electronic LED power supply.

Dimmable constant voltage drivers

DURASTRIP DRIVERS DALI



DURASTRIP DRIVERS DALI

W	Volt IN	V 100-120	Volt OUT	PF	L	L1	H		ART.
96	200-260 Vac	70	24 Vdc	0,9	199	63	35.5	1 / 1	ELG-100-24DA-3Y
150	200-260 Vac	105	24 Vdc	0,9	219	63	35.5	1 / 1	ELG-150-24DA-3Y
200	200-260 Vac	150	24 Vdc	0,9	244	71	37.5	1 / 1	ELG-200-24DA-3Y
240	200-260 Vac	180	24 Vdc	0,9	244	71	37.5	1 / 1	ELG-240-24DA-3Y

Dimming curve expressed as a function of the load, i.e. inversely proportional to the percentage value of the power supply load.


If the product is used at full load, the dimming curve is linear from 10 to 100%, if it is used at half load, the dimming possibility is halved, i.e. a dimming on the control side of 50% will produce a real load dimming of 25%.

It is important to distribute the power evenly over the power supplies in the same area of the installation to achieve consistent dimming levels.


▼ To be discontinued.

Dimmable constant voltage drivers

DURASTRIP DRIVERS TRIAC/LEADING EDGE



DURASTRIP DRIVERS TRIAC/LEADING EDGE


	W	Volt IN	Volt OUT	PF	L	L1	H		ART.
New	80	220-240 Vac	24 Vdc	0,9	200	70	42	1 / 1	ZK7380-D
	90	220-240 Vac	24 Vdc	0,9	180	60	35	1 / 1	ZK7390-D

Control interfaces

CONTROL INTERFACE



DALI CONTROLLER

Volt IN	Volt OUT	L	L1	H		ART.
12-24 Vdc	12-24 Vdc	167	51	23	1 / 1	ZKDAFF

2-channel controller.
It can be used with all white light DURASTRIP.




ZKC1-10



ZKC1-10FF




1-10V CONTROLLER

Volt IN	Volt OUT	L	L1	H		ART.
12-24 Vdc	12-24 Vdc	168	51	23	1 / 1	ZKC1-10
12-24 Vdc	12-24 Vdc	168	51	23	1 / 1	ZKC1-10FF

1-channel controller.
It can be used with all white light DURASTRIP.
Max current 8A.

Control interfaces

CONTROL INTERFACE



DMX CONTROLLER 3 CHANNELS

Volt IN	Volt OUT	L	L1	H		ART.
12-24 Vdc	12-24 Vdc	178	42	33	1 / 1	ZKCDMX-R ▼

It can be used with all DURASTRIP RGB, and white.

Version with RJ45 connector that can be used in the traditional way or with the remote control included in the package.

Max current 5A / channel.

▼ To be discontinued.



ZKCDMXWFF



ZKC1-10FF



DMX CONTROLLER 4 CHANNELS

Volt IN	Volt OUT	L	L1	H		ART.
12-24 Vdc	12-24 Vdc	168	51	22	1 / 1	ZKCDMXWFF
12-24 Vdc	12-24 Vdc	168	51	22	1 / 1	ZKCDMXW

Can be used with DURASTRIP RGB + white (or 4 channels).

Connection diagrams are available at site (in the product datasheet).

Max current 5A / channel.

Control interfaces


CONTROL INTERFACE




ZKREP-4CH



ZKREP-4CH-IP



PWM SIGNAL REPEATER FOR 4 CHANNELS


Volt IN	Volt OUT	L	L1	H		ART.
12-36 Vdc	24 Vdc	178	46	22	1 / 1	ZKREP-4CH
12-36 Vdc	24 Vdc	181	74	38	1 / 1	ZKREP-4CH-IP

It can be used with 4 channels white light DURASTRIP.
Improved technology 4 KHz.
Max current 5A / channel.

DIMMER TOUCH - DMX TOUCH DIMMERS - DMX




DMX WALL TOUCH DIMMER FOR WHITE LIGHT DURASTRIP


Volt IN	# DMX CH	# Zone	# Scene	L	L1	H		ART.
5 Vdc	4	4	4	86	86	10	1 / 1	ZKTPC-DIM

Each channel can have 256 levels of light variation and 4 favourite scenes can be saved.

“Memory” function: the last colour temperature chosen is recalled when the light is switched back on again; 3 scenes can be saved.



DMX WALL DIMMER FOR CTC EFFECT

Volt IN	# DMX CH	# Zone	# Scene	L	L1	H		ART.
5 Vdc	8	4	3	86	86	10	1 / 1	ZKTPC-CTC

Each channel can have 256 levels of light variation and 4 favourite scenes can be saved.

“Memory” function: the last colour temperature chosen is recalled when the light is switched back on again; 3 scenes can be saved.

DIMMER TOUCH - DMX

TOUCH DIMMERS - DMX




DMX WALL TOUCH DIMMER FOR RGB - RGBW DURASTRIP

Volt IN	# DMX CH	# Zone	# Scene	L	L1	H		ART.
5 Vdc	16	4	4	146	106	10	1 / 1	ZKTPC-RGBW

“Memory” function: the last colour level chosen is recalled when the light is switched back on; 4 favourite scenes can be saved. Simultaneous or synchronous control of the RGB colours and white, 36 setting modes.



Emergency kit
EMERGENCY KIT



STANDBY EMERGENCY KIT

	Volt IN	L	L1	H		ART.
Emergency electronic unit for standby lighting	220-240	155	51	26	1 / 1	KTEMR03

Emergency electronic unit for standby lighting (as indicated by the UNI EN 1838) suitable for current controlled power LED.
Can be used for maintained or emergency operation.
Can be used with max 2A - 90V.
Battery life: 3 hours (battery pack dimensions: 135 x 45 x 23 mm).
Battery LiFePO4 inserted in a protective case in accordance with regulations.
Residual flux in emergency 7%.

Reserve lighting means lighting that allows you to continue normal activity without substantial change.
Fixtures indicated as compatible with the kit have passed the required tests for the reserve lighting category in compliance with EN 60598-2-22.


Electronic transformers for halogen lamps

ELECTRONIC TRANSFORMERS FOR HALOGEN LAMPS



220-240 Vac	IP20	-25°C +35°C		SELV
----------------	------	----------------	---	------

ELECTRONIC TRANSFORMERS FOR HALOGEN LAMPS

W	Volt IN	Volt OUT	L	L1	H		ART.
150	220-240 Vac	11,5 Vdc	180	46	36	1 / 1	DELT12150P ▼

▼ To be discontinued.


Casambi accessories

CASAMBI ACCESSORIES



220-240
Vac

A WIRELESS CONTROL MODULE WITH A DALI INTERFACE

	L	L1	H		ART.
Wireless unit with DALI interface	37	41	14	1 / 1	1T5349 ●

It generates a local DALI bus which makes it possible to connect a LED driver directly to a DALI interface.

The module can only be used in a closed system and cannot be connected to an existing DALI network.

The module is wireless controlled using a CASAMBI app for smartphones and tablets using Bluetooth 4.0 technology.

The devices create an adaptive, secure and reliable wireless mesh network that can control a large number of fixtures in a simple and efficient way.

One device can be used to control one appliance/strip only.

● On request.



CASAMBI WALL SWITCH XPRESS

		ART.
CASAMBI WALL SWITCH XPRESS	1 / 1	1T5350 ●

Xpress is a wall mounted wireless user interface; it can be installed wherever the user chooses thanks to battery power with autonomy of 2-3 years providing direct access to all the most important CASAMBI system control functions.

As well as switching the fixtures on and off, Xpress controls dimming, colour temperature change in fixtures equipped with this technology, and control of individual fixtures and lighting scene or sequence management.

● On request.


Casambi accessories

CASAMBI ACCESSORIES



12-24 Vdc

PWM CONTROL UNIT IP20 4CH (RGBW)

	L	L1	H		ART.
CONTROL MODULE PWM IP20 4CH (RGBW)	73	18	30	1 / 1	1T7944 ●


Wireless Bluetooth Dimmer capable of handling constant voltage loads of 12 V or 24 V subdivided into 4 channels with PWM output. This dimmer must be connected between the 12 V or 24 V power supply and the constant voltage LED module. The maximum total current that can be supplied by the control unit is 6 A (equivalent to a total of 144 W) that can be divided between the 4 outputs.

● On request.



85-240
Vdc

IP20 TRAILING EDGE / IGBT DIMMER

	L	L1	H		ART.
TRAILING EDGE DIMMER IP20	37	41	14	1 / 1	1T5351 ●

A Wireless Trailing Edge / IGBT dimmer managed using Bluetooth 4.0 technology. It works with LED 230 V-AC modules, dimmable LED sources and halogen lamps. It can be installed inside a standard 503 wall switch box, lighting fixtures or ceiling canopies. It can manage systems with a maximum absorption of 150 W. The module is wireless controlled using a CASAMBI app for smartphones and tablets or traditional wall switches. IP20.

● On request.

Casambi accessories

CASAMBI ACCESSORIES



EXTENDER IP20

New

CASAMBI EXTENDER IP20 V.2

L

130

L1

22

H

30



1 / 1

ART.

2T0131

Wireless control unit for LED driver with dimming DALI (or 1-10V) interface based on Casambi technology.

It has a DALI2 output with the capacity to control up to 40 lighting fixtures.

With the addition of a further external BUS DALI power supply it is possible to control up to 64 fixtures.

IP20 Extender is preset to the DALI broadcast profile, meaning all the luminaires connected to it are dimmable at the same level.

In addition to the DALI broadcast other operating modes are available, such as:

- EXTENDER DALI 8CH
- EXTENDER DALI Tunable White
- EXTENDER 0/1-10V
- EXTENDER DALI 4CH
- EXTENDER DALI DT8 Tunable White



CONTROL MODULE IP67

L

56,5

L1

22,3

H

35,8



1 / 1

ART.

1E3048 ●

A IP67 Module for individual control of external devices equipped with DALI drivers.

The module needs to be positioned in order to receive radio signals.

The distance to the lighting fixtures can reach up to 50 m.

- On request.


Casambi accessories

CASAMBI ACCESSORIES



EXTENDER IP67

New

	L	L1	H		ART.
CASAMBI EXTENDER IP67 V.2	148	150	40	1 / 1	1E4369

Wireless control unit for LED driver with dimming DALI (or 1-10V) interface based on Casambi technology.

It has a DALI2 output with the capacity to control up to 40 lighting fixtures.

With the addition of a further external BUS DALI power supply it is possible to control up to 64 fixtures.


IP67 Extender is preset to the DALI broadcast profile, meaning all the luminaires connected to it are dimmable at the same level.

In addition to the DALI broadcast other operating modes are available, such as:

- EXTENDER DALI 8CH
- EXTENDER DALI Tunable White
- EXTENDER 0/1-10V
- EXTENDER DALI 4CH
- EXTENDER DALI DT8 Tunable White



EXTENDER IP67

	L	L1	H		ART.
EXTENDER IP67	150	150	40	1 / 1	1E3049 ●

Extender IP67 allows for wireless control with a DALI interface.

It generates a local DALI bus with the capacity to drive up to 64 fixtures.

It can control groups of fixtures in outdoor applications.


It prevents any change to the management features provided by the CASAMBI system.

● On request.



100-240
Vdc

EXTENDER IP20

	L	L1	H		ART.
EXTENDER IP20	100	42	30	1 / 1	1T5352 ●

Extender IP20 allows for wireless control with a DALI interface.

It generates a local DALI bus with the capacity to drive up to 64 fixtures.

It can control groups of fixtures in indoor applications.

It is also equipped with a relay that can control non-dimmable fixtures up to a maximum of 6 A.

It prevents any change to the management features provided by the CASAMBI system.

● On request.

DURASTRIP


MAXIMUM CONNECTION LOADS

BASIC CONFIGURATION: POWER SUPPLY + DURASTRIP


CONFIGURATION WITH DIMMER: POWER SUPPLY + CONTROLLER + DURASTRIP

Power supply

Controller

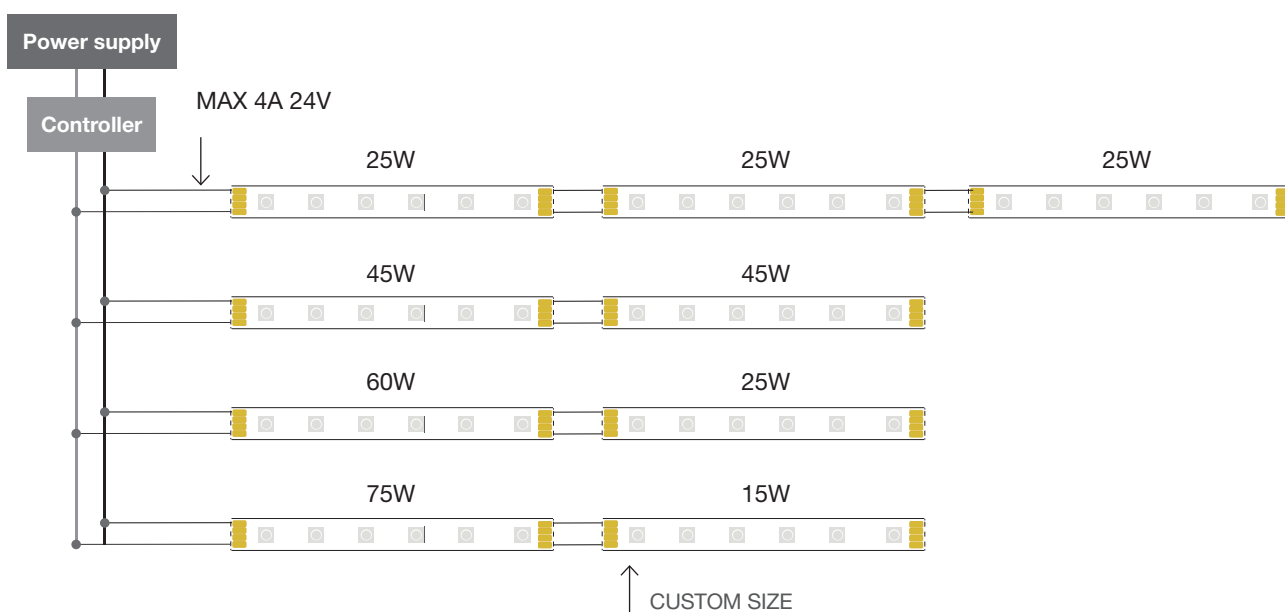

For further details on other connection configurations see the connection diagrams on the following pages.



We recommend to use the power supplies for led sources indicated in the catalogue.



CONNECTION DIAGRAM



ELECTRICAL CONNECTION: connections in series or parallel

single reel power (W)	L (m)	connection	driver @24Vdc	note
280	50m		320W [48Vdc]	
220	20m		320W	
220	40m		600W	
210	5m		320W	
150	5m		200W	
120	5m		150W	
120	10m	Parallel	300 ÷ 320W	
120	15m	Parallel	>400W	
110	5m	-	120 ÷ 150W	
110	10m	Parallel	240W	
110	15m	Parallel	>400W	
100	5m	Parallel	120W	
100	10m	Parallel	240W	
100	15m	Parallel	320W	
75W	5m	-	100W	
75W	10m	Parallel	200W	Each 5m must be installed in parallel
75W	20m	Parallel	320W	
60W	5m	-	100W	
60W	10m	Parallel	200W	Each 5m must be installed in parallel
60W	20m	Parallel	320W	
40W/45W	10m	Series	100W	
40W/45W	15m	Parallel	200W	Each 10m must be installed in parallel
40W/45W	35m	Series and Parallel	320W	
25W	15m	Series	100W	
25W	20m	Parallel	120 ÷ 150W	Each 15m must be installed in parallel
25W	60m	Series and Parallel	320W	

For further details on other connection configurations see the connection diagrams on the following pages.



We recommend to use the power supplies for led sources indicated in the catalogue.





DURASTRIP

Durastrip wiring diagrams

DURASTRIP DIMMER TOUCH




Max power indications for the use
of **DURASTRIP** with the controllers.

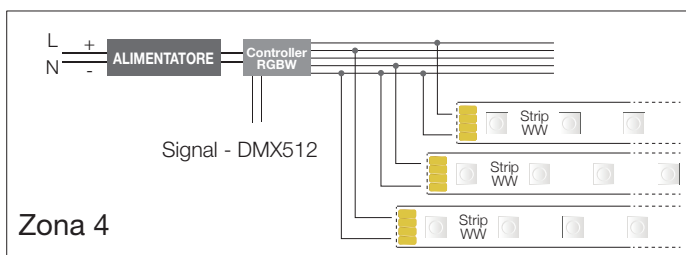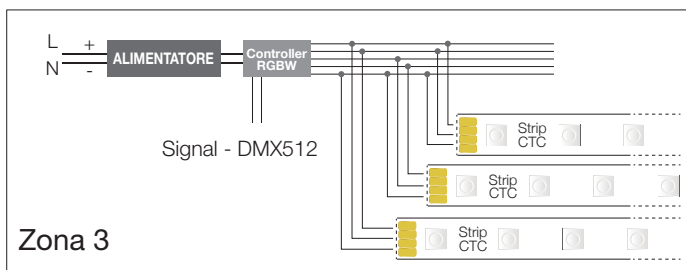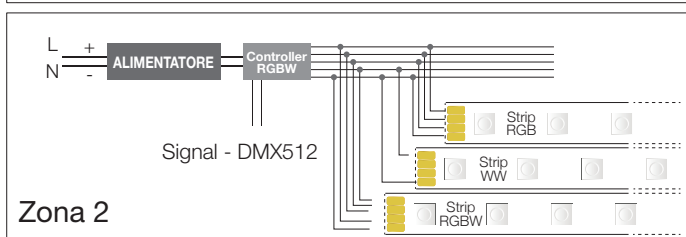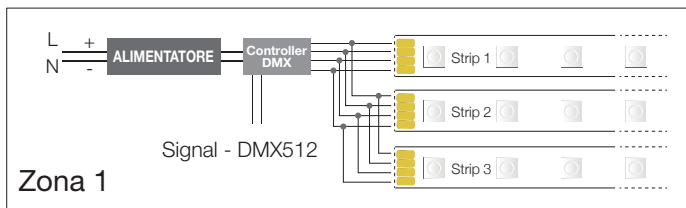

CASAMBI wiring diagrams




Single DALI control IP20

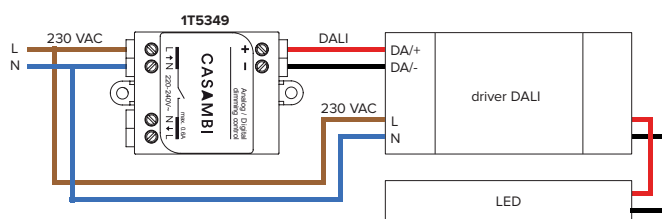

1T5349


Single Trailing Edge control for LED 230 V-AC Modules, dimmable LED sources and halogen lamps - 12V and mains voltage (IP20)

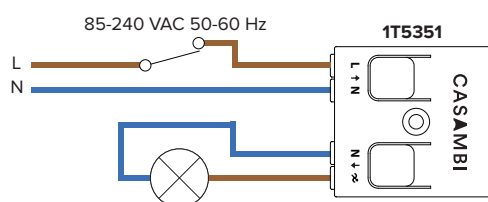

1T5351

CONTROL CASAMBI
1-4CH (IP20)

Wiring diagram, RGBW

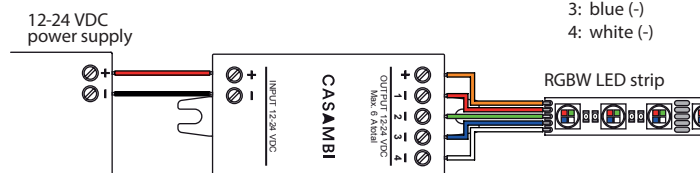

- +: common (+)
- 1: red (-)
- 2: green (-)
- 3: blue (-)
- 4: white (-)

1T7944

Wiring diagram, tunable white



- +: common (+)
- 1: warm (-)
- 2: cool (-)
- 3: not in use
- 4: not in use


Wiring diagram, 1-4 separate channels




- +: common (+)
- 1: channel 1 (-)
- 2: channel 2 (-)
- 3: channel 3 (-)
- 4: channel 4 (-)

Casambi Wiring diagrams


DALI multiple control IP20

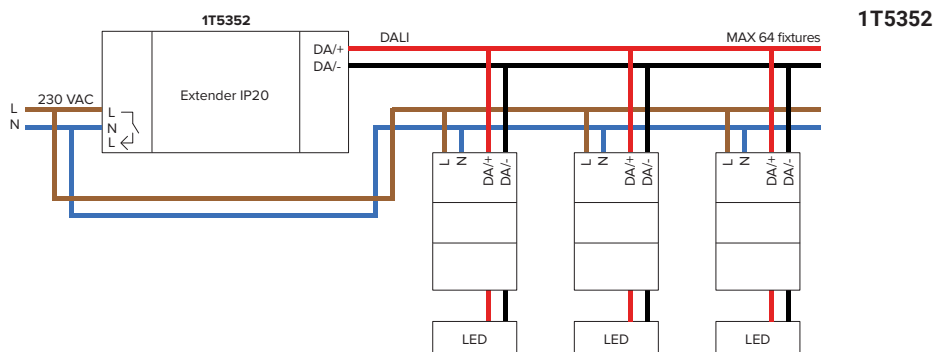


DALI multiple control with relay IP20

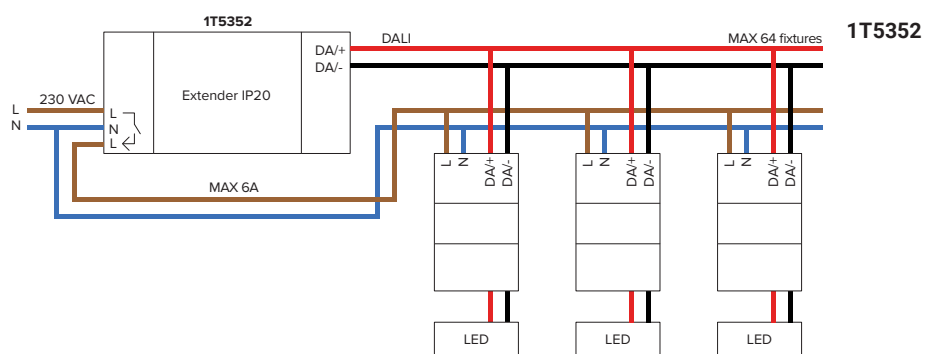

DALI single control IP67

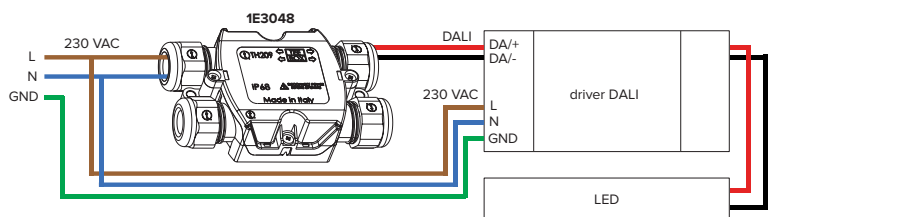

DALI multiple control IP67

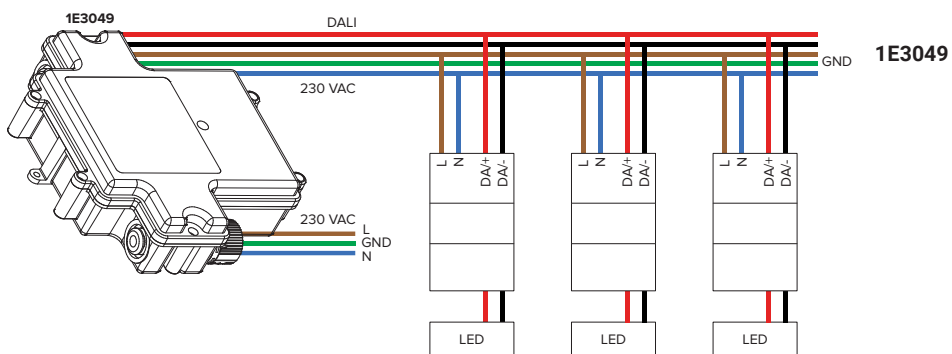



1E3048	24
1E3049	25
1E4369	25
1T5349	22
1T5350	22
1T5351	23
1T5352	25
1T7944	23
2T0131	24
A01484	6
A01485	6
A01486	8
DELT12150P	21
DELT20A-12	12
DELT40D-10V	8
DELT40D-D	7
DELT40D-M	7
DELT60D-D	7
DELT65D-M	7
ELG-100-24DA-3Y	13
ELG-150-24DA-3Y	13
ELG-200-24DA-3Y	13
ELG-240-24A-3Y	10
ELG-240-24DA-3Y	13
HLG-120H-24	10
HLG-320H-24	10
HLG-320H-48A	10
HLG-600H-24A	10

KTEMR03	20
SLD-150-24	9
SLD-50-12	12
SLD-50-24	9
SLD-80-12	12
SLD-80-24	9
XLG-100-24-A	10
XLG-150-24-A	10
XLG-200-24-A	10
ZK600-1400OS	7
ZK73200	11
ZK7380-D	14
ZK7390-D	14
ZKC1-10	15
ZKC1-10FF	15
ZKCDAFF	15
ZKCDMX-R	16
ZKCDMXW	16
ZKCDMXWFF	16
ZKLP1400-EL	6
ZKLP600EL	6
ZKLP700EL	6
ZKREP-4CH	17
ZKREP-4CH-IP	17
ZKTPC-CTC	18
ZKTPC-DIM	18
ZKTPC-RGBW	19



1. Applicability

1.1 These general conditions (hereafter the "Conditions") constitute an integral and essential part of the contract of sale between the Parties. The Conditions shall regulate all legal relationships between Dura Lamp Srl (hereafter "Dura Lamp") and the purchaser (hereafter the "Purchaser") where the said relationships are not disciplined by the applicable terms of the Italian Civil Code (C.C.). The nullity of any of the terms of these Conditions shall not prejudice the validity of the remaining Conditions or the Contract.

1.2 Any changes to these Conditions shall be agreed between the Parties in writing, with the exception of the provisions set down in article 1341 of the Italian C.C..

2. Sales

2.1 Sale requests for the products (hereafter the "Products") shall be accepted 'subject to the seller's approval' and shall be considered to be irrevocable in accordance with and as an effect of article 1329 of the C.C. for a period of 1 (one) month from the date of the order requesting execution without prior acknowledgement, pursuant to and as an effect of article 1327 of the C.C. from the date on which the order is received by Dura Lamp.

2.2 The Products detailed in the individual orders and the relevant accessories shall be supplied to the Purchaser by Dura Lamp with "Retention of Title" pursuant to and as an effect of articles 1523-1526 of the Italian C.C. In this case, the transfer of ownership of the Products to the Purchaser shall take place exclusively upon the full payment of the price agreed, whilst any risks shall be the responsibility of the Purchaser from the moment of delivery of the Products.

2.3 Whilst confirming the terms stated above, the Parties hereby agree that should the Products and relevant accessories be destroyed for causes not attributable to Dura Lamp, the Purchaser shall not be released from the obligation to pay for the same, even where the Products have not yet been delivered.

3. Prices

3.1 The prices detailed on the price list shall be applied to Product sales orders. The aforementioned prices shall be unit prices per single item, except where stated otherwise for certain Products. The Parties shall have the right to agree, in writing, any derogations and/or special conditions of sale.

3.2 Moreover, the Parties hereby agree that the following conditions shall be applied:

- (I) Minimum order: € 300 (three hundred) for Italy - € 750 (seven hundred and fifty) for other countries;
- (II) Delivery free to destination in Italy for orders of € 300 (three hundred) for Italy or more;
- (III) Ex-Works deliveries for other countries.

3.3 The prices given above do not include VAT and installation costs.

3.4 The prices provided in this catalogue shall be valid until a new price list is published.

4. Currency

All prices are given in Euros (exclusive of VAT). Invoices shall be drawn up in Euros.

5. Special requests

Products can be supplied to the Purchaser in non-standard colours and with special features. The relevant price, minimum quantities per order, methods and timing of deliveries shall be agreed in each individual case, in relation to the reference order.

6. Transport

6.1 Dura Lamp shall not be liable for any damage and/or losses which may occur during the transportation of the Products, unless the Products are delivered free at destination.

6.2 Dura Lamp shall have the right to establish the method of transportation to be used for the Products, unless the Parties have previously established a method of transport in writing.

6.3 Upon delivery, the Purchaser shall undertake to verify the condition of the products and shall make any complaints directly to the carrier and/or conduct any actions necessary in the event of loss, misplacement, removal or damage, or delays in transportation and/or the methods of delivery of the Products.

7. Complaints

7.1 In the event that the Products are found to have any faults and/or defects, the Purchaser shall undertake to notify Dura Lamp of the same in writing, by means of a registered letter, no later than 8 (eight) days following the discovery of the said faults and/or defects, at the risk of invalidating the obligations of the guarantee provided by Dura Lamp. In this case, the faulty Products, which should be reported within the terms established, should be returned to Dura Lamp, once the Purchaser has received specific permission to do so in writing.

7.2 In the event that the Purchaser's complaints are held to be valid, Dura Lamp, at its complete discretion, may make the necessary repairs and/or replace the Products, excluding the attribution of any further charges, obligations, indemnification or compensation to the same. The Products in question should be returned to the Dura Lamp Srl plant in Via Pratese 164, 50145, Firenze, Italy. In the event that, following an inspection by Dura Lamp, the Products returned by the Purchaser are not found to be faulty and/or defective, Dura Lamp shall return the Products to the Purchaser, charging the same an amount equal to 15% (fifteen percent) of the value of the said Products.

8. Delivery

8.1 The Parties hereby agree that the terms established for the delivery of the Products shall not be considered absolute or essential and that, in any case, each item shall be exclusively in favor of Dura Lamp, unless otherwise agreed in writing between the Parties.

8.2 In the event of delayed delivery, once 15 (fifteen) days have passed since the agreed date, the Purchaser may send Dura Lamp written warning to complete the delivery within a further term of no more than 15 (fifteen) days from receipt of the same. In the event that Dura Lamp has not completed the delivery within this further term the Purchaser may withdraw from the order with regard to the Products that have not yet been delivered. In this case the Purchaser shall only be obliged to pay Dura Lamp for the Products actually delivered, excluding the payment of any further indemnification and/or compensation to the Purchaser.

8.3 Dura Lamp shall not be responsible for any other breaches, including the failure to deliver or delayed delivery of the Products, caused by events outside its reasonable control such as, purely by way of an example and not limited to the same: the failure to deliver or delayed delivery of manufacturing materials by Dura Lamp's suppliers, equipment breakdowns, strikes and other trade union action, electricity blackouts, suspension of or difficulties with transportation.

9. Payment

9.1 The price due shall be paid by the Purchaser according to the conditions and modalities set down in the order and, in any case, by means of payments made exclusively to "DURA LAMP Srl".

9.2 Dura Lamp shall only recognize the validity of the payments when the same are made in compliance with the provisions of article 9.1 above. This means that amounts paid using any other method shall not be considered to be a payment in discharge of the Purchaser's obligations. The eventual acceptance by Dura Lamp of a bank draft or other trade bill shall only occur with the application of the proviso "under usual reserve".

9.3 In the event of delayed payment with respect to the terms agreed, the Parties hereby agree that bank interest shall be due to Dura Lamp at the current PRIME RATE increased by 3 points. interest shall be applied as of right, with no obligation for Dura Lamp to send the Purchaser a formal notice to pay.

9.4 Moreover, in the event of a delay in payment of more than 15 (fifteen) days, Dura Lamp shall have the right to terminate the order as of right pursuant to article 1456 C.C., sending written notification of the same, barring compensation for any damage.

9.5 In the event that the Parties have agreed upon a method of payment by instalments for the Products, the failure to pay several instalments or just one instalment exceeding one eighth of the overall price of the Products, shall result in the loss of the Purchaser's right to pay in instalments and shall give Dura Lamp the right to request the remaining balance of the price or, alternatively, at its own discretion, to terminate the contract with immediate return of the Products and the acquisition of the instalments paid, as indemnification, barring the right to compensation for any damage sustained.

10. Guarantee

10.1 The Products provided by Dura Lamp shall be guaranteed for a period of 12 (twelve) months from the date of delivery against any manufacturing or material defects and/or faults and against any breakdowns not attributable to the Purchaser. Dura Lamp's only obligation and the Purchaser's right with regard to claims related to the guarantee shall be limited, as decided by Dura Lamp, to the replacement or repair of the defective or non-compliant product or the reimbursement of the price for the purchase of another product. Dura Lamp shall be granted a reasonable amount of time to repair or replace the product, or to make the previously authorized reimbursement. Any defective or non-compliant Products shall become the property of Dura Lamp as soon as they have been replaced or reimbursed.

10.2 The guarantee shall exclude any failures due to circumstances beyond the control of Dura Lamp (lightning, flooding, etc.), as well as any damage caused by the improper use of the Products and/or relevant accessories. Notwithstanding the above, Dura Lamp shall not be bound by the guarantee if the contested defects or non-compliances have occurred as a result of submitting the Products to resistance or environmental tests, the incorrect use of the same, or in the event that the use of or conditions of use of the Products is different from that indicated in the instructions and technical information, as a result of negligence, incorrect installation or accident, or if they derive from improper repairs, alterations, modifications, storage or transportation or by incorrect handling.

10.3 The Purchaser shall send the Products returned in accordance with the terms of the guarantee to the place indicated by Dura Lamp in compliance with the Dura Lamp policy regarding authorization to return materials in force at the time. In the event that the Products returned are found to be compliant or not faulty, the Purchaser shall pay the cost of returning the same as well as the cost of insuring, inspecting and handling the Products.

10.4 LED products Enjoy specific guarantees: details are published on www.duralamp.com

11. Limitation of Liability

11.1 With the sole exclusion of criminal intent and gross negligence, Dura Lamp shall not be liable for loss of profits or savings, loss of reputation or goodwill, any direct, indirect, consequential or special damage that may derive from or be connected to the contract or sale of products or services by Dura Lamp or by the use of the same of a contractual or extra-contractual nature or deriving from any other source, even where Dura Lamp has been notified of or is aware of the possibility of such damage.

11.2 The limitations and exclusions stated in article 11 shall apply within the limits permitted by law.

12. Applicable law and place of jurisdiction

12.1 These Conditions and all the effects of the same shall be governed by Italian law. The Parties hereby agree that any disputes related to these Conditions shall refer to Italian jurisdiction to the exclusion of all others.

12.2 The exclusive place of jurisdiction shall be the registered offices of Dura Lamp Srl, with the express exclusion of any other competing places of jurisdiction.



DURA LAMP S.r.l.
Registered office Via Pratese, 164 – 50145 Firenze
Tel. 055 894 881
e-mail: duralamp@duralamp.it

Registered with the Florence Company Register -
C.F. and VAT number 03312240488
Registered with R.E.A. of Florence at n. 353287 Share capital € 400,000.00 i.v.
Subject to the management and coordination of 3F FILIPPI Srl



A complete list of the Dura Lamp distribution
and project network is available at:

www.duralamp.com

DURALAMP | UNICO Catalogue 24/25

© Copyright 2024 - Dura Lamp S.r.l.

All data and pictures provided in this catalogue are for reference only: since they might change during mass production, they have to be considered nominal values with tolerances. Dura Lamp reserves the right to modify its products in any moment, for technical or commercial reasons.

Photos: Ivan Rossi - Studio Artale - Studio Ceccanti - Alessandro Maurelli - Luca Visentini

Graphic project: Lorenzetti Communication and FD Graphic Studio

Indoor or outdoor setting photos are used to illustrate the possible applications of the product.





duralamp.com