



DURASTRIP SELECT IP20

Typology

24V Strip LED.

Features

The luminous flux is REAL and measures on the LED strips in their effective use conditions (nominal source values are not reported).

Installation

The 25W and 60W strips can be installed directly on the application surface using the included double-sided 3M adhesive or bridges: we recommend the using aluminium profiles only with the 96W strips, in order to optimize heat dissipation. When using double-sided tape degrease the application surface adequately.

Usage information

Dimmable 0-100%
DALI - DMX
Analogue and digital domotic control systems
Push Dali with ZKCDA controllers
CASAMBI compatible

Power supply

Max current for single power supply: 4A.

Packaging

Packaged in 5 meters reels.
96W strip is packaged in 4 meters rolls.

Notes


Free wires.
Strips can be cut to size by following the cutting indications printed on the strips.

Colour of the light

Choice of white colour temperatures.

Connections

IP20: terminals with free wires.
Maximum connection length 5 m. Max 4A.
For longer connections, connect in series or in parallel, see diagram in Info Tech.
Strips can be cut to size by following the cutting indications printed on the strips.

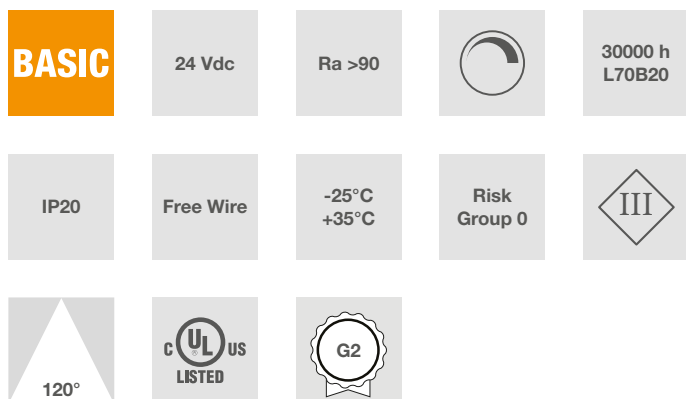


Characteristic data

Power	60 W	Beam	120°	Dimmable	Yes	Input	24 Vdc
Base	Free Wire	IP	20	Flux	5500 lm	Tc	2700 K
Ra	>90	LED Warranty	G2	RG	RG0		

Dimensional characteristics



5W/m, 12W/m



L	5000 mm
L1	10 mm
H	2.3 mm

Cutting pitch	100 mm
LED pitch	8 mm

Lighting and photometric features

Beam opening	120°
Nominal flux per mt	1100 lm/m
Flux	5500 lm
CCT nominal colour temperature	2700 K
Colour of the light	Warm light
Colour rendering index	>90
Lifespan	30000 h
LED lifespan	L70B20
Trigger time	<0,2 s
Heating time up to 60% of full efficiency	Instant Full Light
Mercury	0 mg

Electrical characteristics

Rated power	60 W
Input voltage	24 Vdc
Dimmable	Yes
Energy efficiency class	This product contains a light source of energy efficiency class "F"
Number of cycles	60000
Operating temperature	-25°C / +35°C
Operating position	360°

Photometry

	2700K	H(m)	D(m)	Emax(lx)
	Ra90		116°	
	Fixture Power	12W	1	3.18
	Source Flux	1098lm	2	6.36
	Fixture Flux	1098lm	3	9.54
	Efficacy	92lm/W	4	12.71
	849009 I _{max} =339cd/klm	I _{max}	373cd	5
			15.89	15

EuLumDat file on the site

LED Warranty

G2	Up to 2 years (4000h/year) *4000h = 11h a day x 365 days. Without limitations on the duration of use for the first year, provided the observance of the installation conditions.
----	--

European Directives

2009/125/EC * Ecodesign
2011/65/EU * RoHS
2012/19/EU * RAEE
2014/30/EU * EMC
2015/863 * Amending RoHS
2017/1369 * Regulation for Energy Labelling
2019/2015 * Regulation for Energy Labelling
2019/2020 * Regulation for Ecodesign
2021/340 * Amending Reg. Energy Labelling
2021/341 * Amending Reg. Ecodesign

Product standards

CEI EN 55015:2020 (+A11:2020)
CEI EN 60598-1:2022
CEI EN 60598-2-1:2022
CEI EN 61000-3-2:2019 (+A1:2021)
CEI EN 61000-3-3:2014 (+EC1:2014/+EC2:2016/+A1:2021/+A2:2022)
CEI EN 61547:2010
CEI EN 62031:2021 (+A11:2022)
CEI EN 62471:2010
IEC/TR 62471-2:2009
CEI EN 62493:2015
CEI 34-141:2014

Logistics data

Item net weight	93 gr
Barcode single item	8011905849009
Number of pieces multiple pack	20
Minimum order quantity	1
Minimum packaging	1 / 20