



DURA

LAMP



LINEAR SYSTEMS

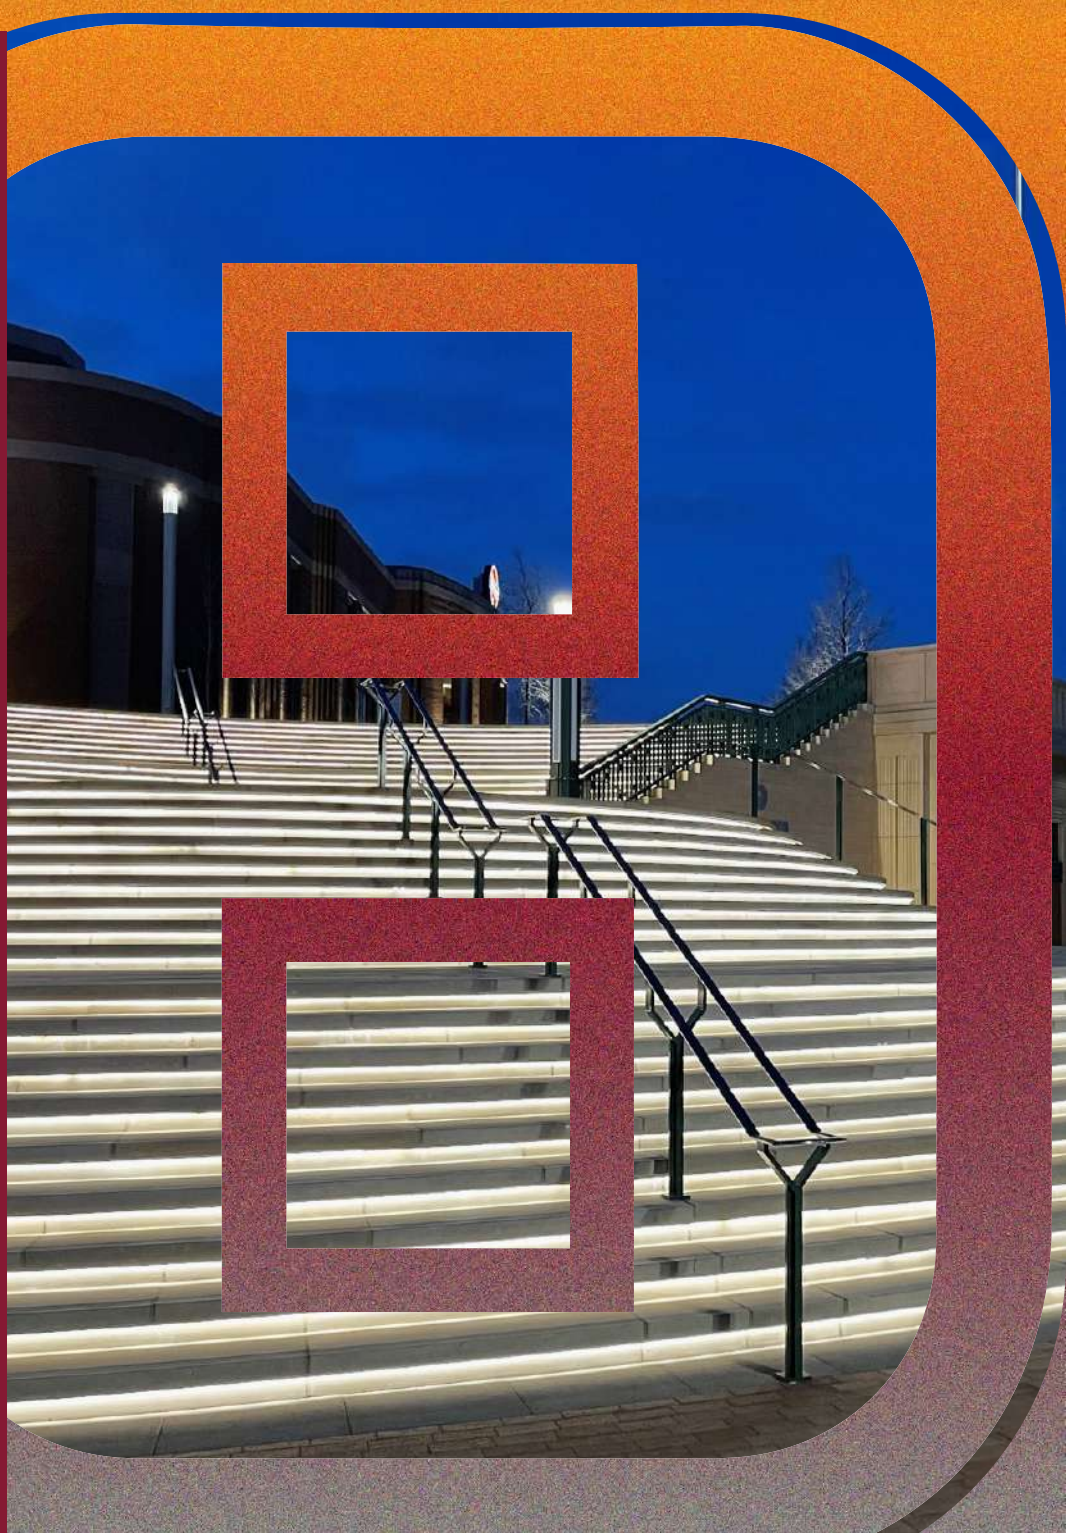



Linear systems

DURASTRIP COB



20 **BASIC**
DURASTRIP COB



22 **BASIC**
DURASTRIP SELECT
140



24 **BASIC**
DURASTRIP SELECT
240



26 **BASIC**
DURASTRIP SELECT
IP20



28 **BASIC**
DURASTRIP SELECT
IP65

Linear systems

DURASTRIP



32 **PRO**
DURASTRIP PRO
IP20



34 **PRO**
DURASTRIP PRO
IP68



36 **PRO**
DURASTRIP
PRO240 IP20



38 **PRO**
DURASTRIP
PRO240 IP65



40 **PRO**
DURASTRIP HIGH
EFFICIENCY IP20



42 **PRO**
DURASTRIP HIGH
EFFICIENCY IP68




44 **PRO**
DURASTRIP PRO
EVO IP20



46 **PRO**
DURASTRIP PRO
EVO IP68



48 **PRO**
DURASTRIP
TRIPLES




50 **PRO**
DURASTRIP EXTRA
NARROW IP20



52 **PRO**
DURASTRIP EXTRA
NARROW IP65



54 **PRO**
DURASTRIP
BIDIRECTIONAL



56 **PRO**
DURASTRIP S BEND



58 **PRO**
DURASTRIP
EXTRALONG 24V
IP20



60 **PRO**
DURASTRIP
EXTRALONG 24V
IP65



62 **PRO**
DURASTRIP
EXTRALONG 48V
IP20



64 **PRO**
DURASTRIP
EXTRALONG 48V
IP65




66 **PRO**
DURASTRIP WALL
WASHER




68 **PRO**
DURASTRIP
GRAZER



70 **PRO**
DURASTRIP FULL
SPECTRUM IP20



72 **PRO**
DURASTRIP FULL
SPECTRUM IP68



76 **PRO**
DURASTRIP
TUNABLE CCT



78 **PRO**
DURASTRIP DIM-
TO-WARM IP20



80 **PRO**
DURASTRIP DIM-
TO-WARM IP65




82 **PRO**
DURASTRIP
EXTREME TUNABLE
CCT IP20



84 **PRO**
DURASTRIP
EXTREME TUNABLE
CCT IP65



86 **PRO**
DURASTRIP FOOD



88 **PRO**
DURASTRIP PRO60
RGB IP20



90 **PRO**
DURASTRIP PRO60
RGB IP65



92 **PRO**
DURASTRIP RGB +
WHITE IP20

Linear systems

DURASTRIP



94 **PRO**
DURASTRIP RGB +
WHITE IP68



96 **PRO**
DURASTRIP EXTRA
NARROW RGB

DuraNeonFlex



104 **PLUS**
DuraNeonFlex TOP



110 **PLUS**
DuraNeonFlex VERT



116 **PLUS**
DuraNeonFlex-Q
TOP



120 **PLUS**
DuraNeonFlex-Q
VERT



124 **PLUS**
DuraNeonFlex
TWIST



128 **PLUS**
DuraNeonFlex MINI

DURASTRIP HiVolt



136 **PRO**
DURASTRIP HiVolt



138 **PRO**
DURASTRIP HiVolt
ARCH DIMMABLE



142 **PRO**
DURASTRIP HiVolt
CCT + DIM TO
WARM

Surface profiles



148
SURFACE PROFILES:
PRAP-U



150
SURFACE PROFILES:
PRAP



152
SURFACE PROFILES:
P02B



153
SURFACE PROFILES:
P03B



154
SURFACE PROFILES:
P03F

Linear systems

Recessed profiles



155
RECESSED
PROFILES: PRIN-U



157
RECESSED
PROFILES: PRIN



158
RECESSED
PROFILES: P08D



159
RECESSED
PROFILES: P055



160
WALK OVER
PROFILE: P03E

Corner profiles



161
PRAN-U CORNER
PROFILE



163
CORNER PROFILE:
PRAN

Decorative profiles



164
DECORATIVE
SUSPENSION
PROFILES: P01L



165
DECORATIVE
SUSPENSION
PROFILES: P06H



Linear light integrates perfectly into architectural space

DURASTRIP

the true protagonists in lighting projects

White light

General Lighting
Emphasising architectural detail
Highlighting featured areas
Single colour light
Intensity dimming

BASIC

DURASTRIP COB - IP20
DURASTRIP SELECT 140 - IP20 IP65
DURASTRIP SELECT 240 - IP20 IP65
DURASTRIP SELECT - IP20 IP65

PRO

DURASTRIP PRO - IP20 IP68
DURASTRIP PRO 240 - IP20 IP65
DURASTRIP HIGH EFFICIENCY - IP20 IP65
DURASTRIP PRO EVO - IP20 IP68
DURASTRIP TRIPLES - IP20
DURASTRIP EXTRA NARROW - IP20 IP65
DURASTRIP BIDIRECTIONAL - IP20
DURASTRIP S BEND - IP20
DURASTRIP EXTRALONG 24/48V
DURASTRIP WALL WASHER - IP67
DURASTRIP GRAZER - IP67



Human centric lighting

By operating dynamically, intensity and colour temperature will work in harmony with the natural circadian rhythm of the human body as well as having the capability to adapt to the different moments and tasks of the day.

DURASTRIP FULL SPECTRUM - IP20 IP68
DURASTRIP TUNABLE CCT - IP20 IP65
DURASTRIP DIM-TO-WARM - IP20 IP65
DURASTRIP EXTREME TUNABLE CCT - IP20 IP65


Light and colour

Colour Emotion
Visual Interest
Paint with Light
Colour variation

DURASTRIP FOOD
DURASTRIP PRO60 RGB - IP20 IP65
DURASTRIP RGB + WHITE - IP20 IP68

We have **all the tools** to create
unforgettable environments

the optimal tool for enhancing the fluid forms
of contemporary architecture

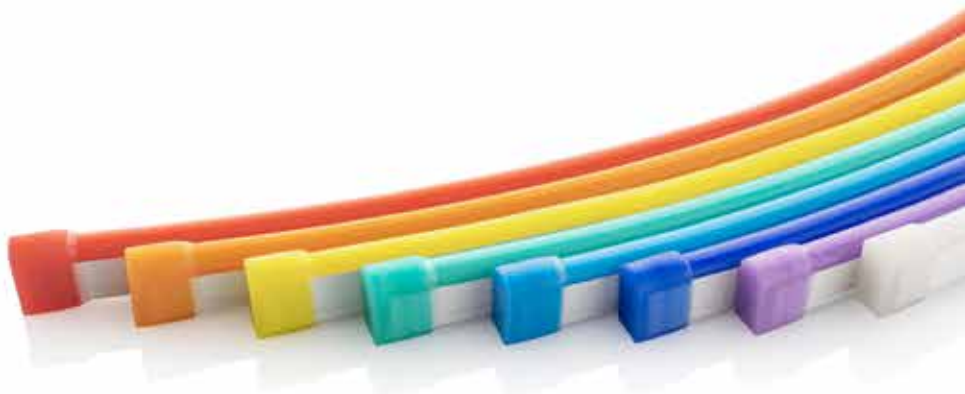

The mains voltage strip supplied ready to use
IP40 - IP65



ALUMINIUM PROFILES

Find the right profile for
any lighting installation...

SURFACE PROFILES
RECESSED PROFILES
CORNER PROFILES
DECORATIVE PROFILES





THE DURASTRIP RANGE FEATURES

The DURASTRIP range is truly comprehensive and able to meet any requirement, from small cost-conscious projects to sophisticated projects with significant quality demands.

The characteristics of each family are clearly specified on each page: on DURASTRIP comparison table you will find a table summarising

the data of the different models.

The entire range shares the following characteristics

Ra80 > Ra95



Very high colour rendering: indispensable in prestigious projects, environments with particular uses, museum installations...

CONSISTENCY AND PRECISION OF COLOUR



COLOUR PRECISION

High quality LED sources with the Bin centred on the Planck curve with a 2 to 5 MacAdam steps tolerance, depending on the model, on all production lots.

COLOUR CONSISTENCY

among the various lots in production and cancellation of colour shifting during useful life thanks to the low driving current, excellent thermal management and effective control of the production line.

COLOUR UNIFORMITY IP20 E IP68



DuraStrip IP68 are produced with extrusion technology: the high quality materials used make it possible to maintain the same light colour between IP20, IP65 and IP68!

DIMMABLE FROM 0 TO 100%



easy to control light with the most common dimming systems

- DALI
- DMX
- Domotics controls
- Push, DALI
- CASAMBI compatible



LIFETIME :
25.000H--> 60.000H

IP20 - IP65
IP67 - IP68



What do you need f
or your project?



The degree of protection can be se-
lected depending on the use. Nor-
mally used in indoor installations
IP20 strips can be sealed in profiles
which increases mechanical resi-
stance and simplifies maintenance.



Duralamp strips are CE, UL or
ETL certified, quality marks
recognised worldwide.



3 YEARS:
reliability and quality
for a variety of projects.

5 YEARS H24:
THE TOP OF THE RANGE,
perfect for the most demanding and im-
portant projects

CERTIFIED QUALITY

5 YEAR 24*H WARRANTY



LINEAR LIGHTING FOR YOUR PROJECTS

Standard SELECTION



DuraStrip white light
DuraStrip human centric
DuraStrip colour

Duraneonflex

DuraStrip hivolt

DURASTRIP: packed in 5-metre rolls (except where otherwise specified) that can be cut to size on site with the cutting pitch indicated on each product.

DURANEONFLEX: packed in rolls of 5 or 10 metres depending on the model.

Line voltage DURASTRIP HiVolt is assembled internally with the length and wiring terminals as requested by the customer.

Surface profiles

Recessed profiles

Corner profiles

Decorative profiles

ALUMINIUM PROFILES

the standard length of Duralamp profiles is 2 metres (except where otherwise specified). Each bar comes complete with fixing accessories (clips) and end caps.

LINEAR LIGHTING FOR YOUR PROJECTS

Customised service at standard costs

Why is it worth using the Customised Service?

Because it reduces installation time and costs

Because it allows greater precision

Because the product is assembled, tested and guaranteed by Duralamp



What can we 'tailor' to the needs of your project?

Light lines of any range, cut to the desired size, with the required length and IP rated wiring.




Profiles cut to size, complete with mounting accessories.



Assembly of strips and profiles cut to size, complete with assembly accessories and/or with special processing (resin coating etc.).



Light 'cut to measure'.
Duralamp's expertise on the creation of specific light spectrums enables the study and realisation of special, innovative and stunning light tones that enhance large projects.

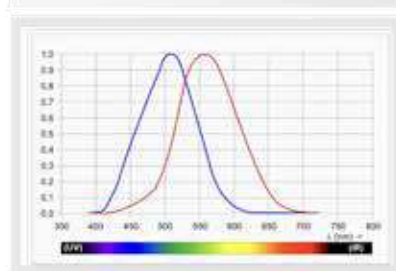



CUSTOM CUTS

The basic elements to be considered when structuring a cut-to-size request are the same as those needed to realise a project:

1


Strip Selection

Type of strip, light colour and power required.

2

The Cutting Pitch

The cutting pitch of the selected strip (i.e. the minimum cut of the strip, indicated on all strips). In the event that the selected strip does not allow the desired length to be achieved exactly, it is important to decide whether the cut is to be made in excess or short of the expected length.

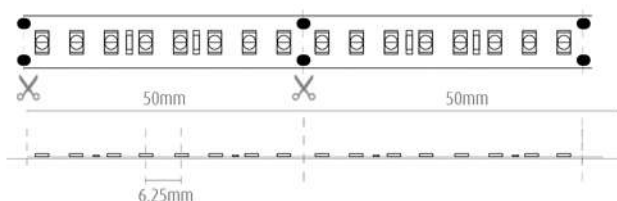

REQUIRED SIZE 1157MM

cutting pitch
of this strip
50mm


final cut of
1150mm
or 1200mm

3

Types and length of terminals

The size of the closing and/or power terminals when needed (e.g. mains voltage strips have large terminals, see DuraStrip HiVolt pages).

Dimensions of 24V strip terminals (indicative)

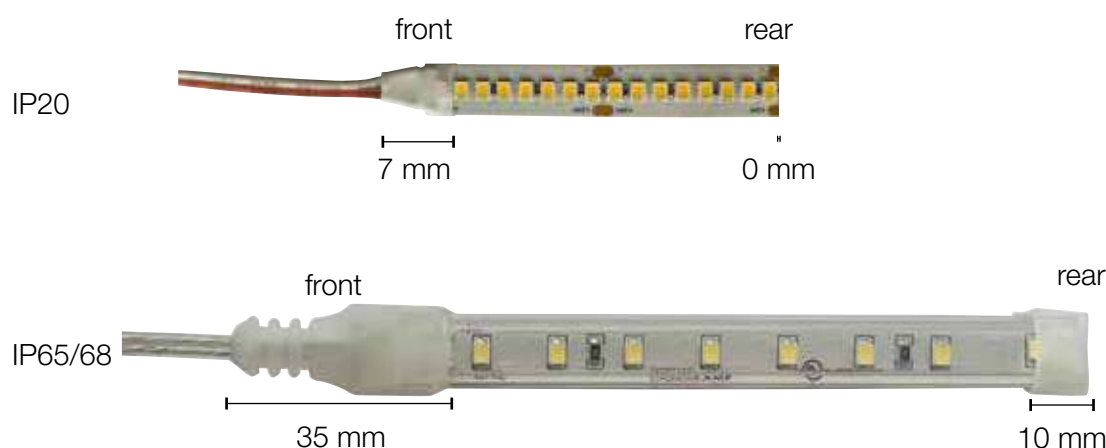

4

The Total length associated with the resulting power

Remember that the maximum length per power supply is equal to the length of the reel: 4m, 5m, 10m, 20m, 50m etc. depending on the model.

See the table on driver connections on page 493 (of UNICO Catalogue) "Connection modes".

These **4 pieces of information** allow you to make an accurate design or request customised machining.

PERSONALISED SERVICE

READY TO INSTALL

A personalised service is provided for all light ranges and profiles in this catalogue. Every process entails a fixed price that must be added to the cost per metre of the strips or profiles to be cut to size. Also consider the possibility to insert strips in profiles:

Cutting DURASTRIP HiVOLT to size* (includes a 150 cm cable):

VA00

fixed cost of piece work

Cutting DURASTRIP to size* (includes a 20 cm cable):

VA01

fixed cost of piece work

Cutting DuraNeonFlex to size* (includes a 30 cm cable):

VA02

fixed cost of piece work

Cutting profiles to size (includes mounting accessories) :

Cutting DuraNeonFlex to size (no terminal)*:

VA03

fixed cost of piece work

Cutting Custom profiles to size (includes mounting accessories):

VA04

fixed cost of piece work

Assembly of strips onto profiles:

VA05

fixed cost of piece work

EXAMPLE:

Assembly of strips onto profiles:

VA01

fixed cost of cutting the strip

VA03

fixed cost of cutting standard profile

VA05

fixed cost of assembling the strip +profile (for every strip)

* DuraStrip and DuraNeonFlex must be cut by respecting the cutting pitch distances for each type.

Other particular processes such as resins, cables of specific lengths etc, must be agreed with the sales force on a project basis. The personalised service is subject to a minimum order: your local sales contact or our headquarters in Florence will evaluate the options available with you depending on the size of the project and required production time.




TM30


The Colour Rendering Index Ra or CRI, is a dimensionless index that ranges from 0 to 100 and partially describes the capacity of a light source to faithfully render the colour of a consistently lit object in line with what a reference source would do. It is based on the adherence of a source to the light emitted by a tungsten filament evaluated on a panel of 14 colour samples, of which only the first 8 are taken into consideration, none with saturated hues.

The TM-30 30 index allows for a more complete reading on the way a source is able to render colour. It introduces the concept of saturation, uses a balanced mixture of incandescent lamps and sunlight as a reference and extends colour samples to 99 subdivided into 7 reference areas with colours from nature for example flowers and leaves, skin tones, colours of paintings, textiles, plastics, printed material and 14 CRI colour samples.

CRI COLOUR RANGE



TM-30 COLOUR RANGE

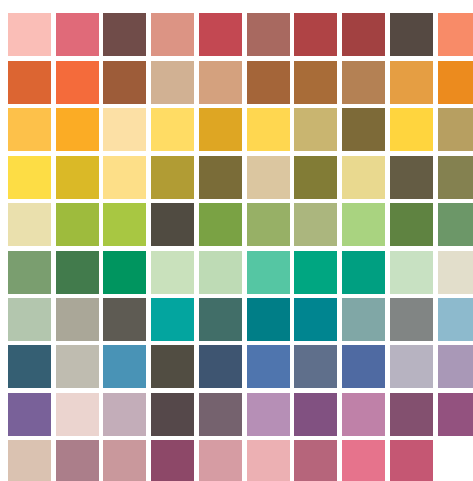


The additional information that TM30 can give is provided by two graphs that summarise the values relating to Rf, Rg and Hue Shift (a shift in the colour hue, or the perception of a false colour compared to what we would see in sunlight), and the second how the source works for groups of materials (99CES) for immediate understanding:

The “rendering” of the source is expressed with a series of explanatory graphics of the colorimetric and qualitative characteristics and 2 distinct indexes.


The fidelity index Rf, which describes the ability of the source to render colours.

It varies on a scale of 0 to 100 where 100 is perfect adherence. It is also possible to have Rf targeted on one of the seven reference areas. For example “Rf skin” refers to the ability of the source to express the colours relating to the reference area concerning skin tone. It is similar to Ra but can be lower given that the reference colours range from 14 to 99.

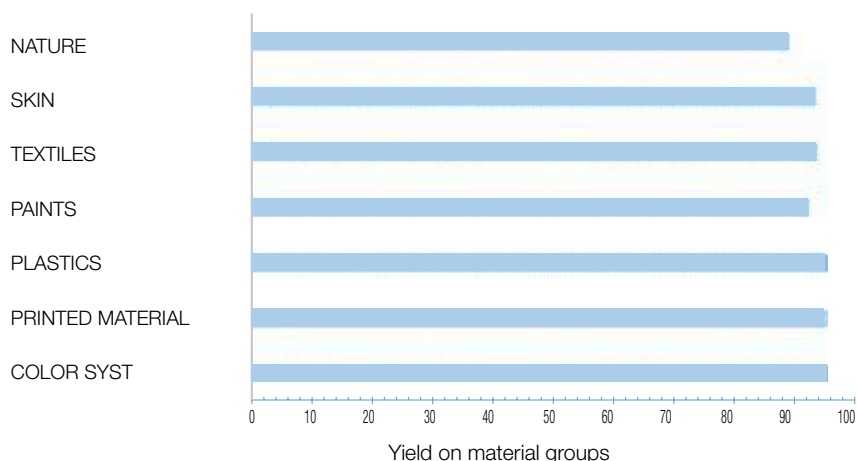


TM30

The Gamut index R_g , which expresses the saturation level of the colours lit by the source. It varies on a scale from 60 to 140. Values lower than 100 indicate a decrease in saturation, higher values indicate an increase in saturation therefore more vivid colours. Colours will be more or less saturated depending on whether they are inside or outside the reference circle.

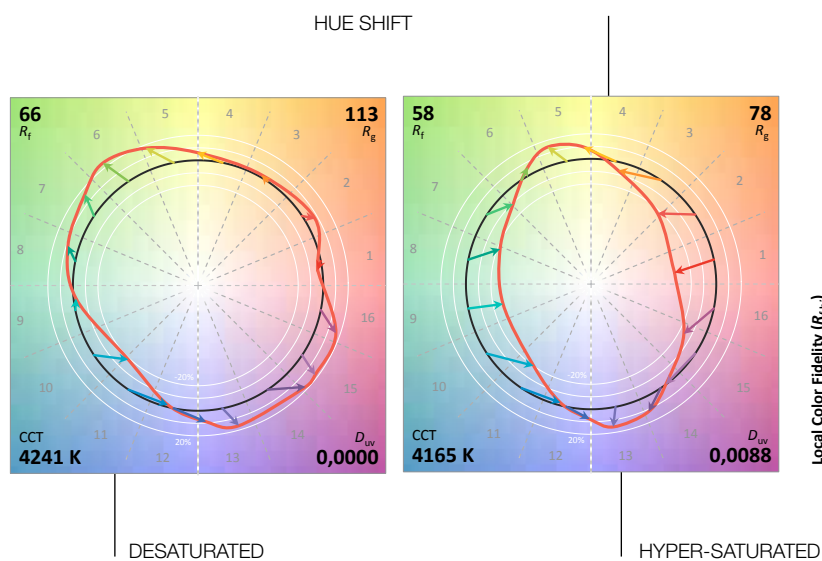


The last in-depth graph is the detail of the deviation and rendering of semitones compared to the reference source that is represented by the following diagram:

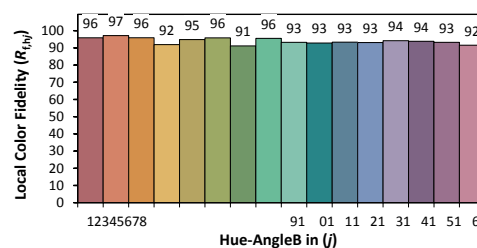

DESATURATED

HYPER-SATURATED

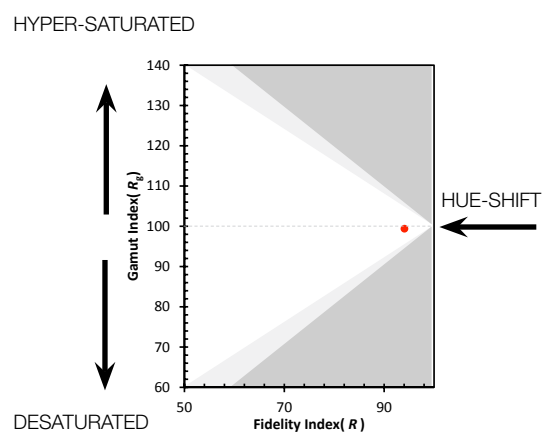





DURASTRIP SYNOPTIC TABLE

ART.	W min/ max	lm min/ max	Ra	N° Led/m	2200K	2700K	3000K	3500K
DURASTRIP COB ♦	7 - 10	600 - 1030	90	320		2700	3000	♦ 3500
DURASTRIP SELECT 140 IP65	14	1300 - 1400	90	140			3000	
DURASTRIP SELECT 140 IP20	14 - 24	1300 - 2150	90	140			3000	
DURASTRIP SELECT 240 IP20	11 - 24	1050 - 2200	90	240			3000	
DURASTRIP SELECT 240 IP65	11 - 14	1050 - 1400	90	240			3000	
DURASTRIP SELECT IP20	5 - 24	500 - 2250	>90	60-120		2700	3000	
DURASTRIP SELECT IP65	5 - 24	490 - 2180	>90	60-120		2700	3000	
DURASTRIP PRO IP20	5 - 15	300 - 1400	>95	50-120	♦ 2200	2700	3000	♦ 3500
DURASTRIP PRO IP68	5 - 30	300 - 2500	>95	50-240	♦ 2200	2700	3000	♦ 3500
DURASTRIP PRO240 IP20	14 - 24	1260 - 2200	>95	240		2700	3000	♦ 3500
DURASTRIP PRO240 IP65	14 - 24	1260 - 2200	>95	240		2700	3000	♦ 3500
DURASTRIP HIGH EFFICIENCY IP20	7,2 - 21,6	1188 - 3800	92	80-128-160-240		2700	3000	♦ 3500
DURASTRIP HIGH EFFICIENCY IP68	7,2 - 21,6	1188 - 3800	92	80-128-160-240		2700	3000	♦ 3500
DURASTRIP PRO EVO IP20	5 - 24	630 - 3360	>92	128-240		2700	3000	♦ 3500
DURASTRIP PRO EVO IP68	5 - 22	600 - 2925	>92	128-240		2700	3000	♦ 3500
DURASTRIP TRIPLES	42	5060 - 5205	>90	480			♦ 3000	
DURASTRIP EXTRA NARROW IP20	7,2 - 11	515 - 800	>90	180	♦ 2200	2700	3000	♦ 3500
DURASTRIP EXTRA NARROW IP65	11	720 - 800	>90	300	♦ 2200	2700	3000	♦ 3500
DURASTRIP BIDIRECTIONAL	14,4	1100 - 1320	>80	240	♦ 2200	♦ 2700	♦ 3000	♦ 3500
DURASTRIP S BEND	7,2	520 - 580	>90	60		♦ 2700	♦ 3000	♦ 3500
DURASTRIP EXTRALONG 24V IP20	11	695 - 715	>90	120			3000	3500
DURASTRIP EXTRALONG 24V IP65	11	695 - 715	>90	120			3000	3500
DURASTRIP EXTRALONG 48V IP20	5,6	520 - 535	>90	84			3000	3500
DURASTRIP EXTRALONG 48V IP65	5,6	520 - 535	>90	84			3000	3500
DURASTRIP WALL WASHER	19,2	1400 - 1500	>90	30		♦ 2700	♦ 3000	♦ 3500
DURASTRIP GRAZER	19,2	1750 - 1850	>90	42		♦ 2700	♦ 3000	♦ 3500
DURASTRIP FULL SPECTRUM IP20	14	1170 - 1300	>95	240		♦ 2700	♦ 3000	♦ 3500
DURASTRIP FULL SPECTRUM IP68	14	1170 - 1300	>95	240		♦ 2700	♦ 3000	♦ 3500
DURASTRIP TUNABLE CCT IP20	14	1000 - 1080	>90	240	1800-3500		2700-6500	
DURASTRIP TUNABLE CCT IP65	14	1000 - 1080	>90	240	♦ 800-3500 / ♦ 2700-6500		♦ 2700-6500	
DURASTRIP DIM-TO-WARM IP20	9,6	900	>90	224	♦ 1800-3000		♦ 2700-6000	
DURASTRIP DIM-TO-WARM IP65	9,6	900	>90	224	♦ 1800-3000		♦ 2700-6000	
DURASTRIP EXTREME TUNABLE CCT IP20	23	1250	>80	96		3000-6500+RGBA		
DURASTRIP EXTREME TUNABLE CCT IP65	23	1250	>80	96		♦ 3000-6500+RGBA		
DURASTRIP FOOD IP68	14	730 - 1180		120				
DURASTRIP PRO60 RGB IP20	10	--	>80	60				
DURASTRIP PRO60 RGB IP65	10	--	>80	60				
DURASTRIP RGB + WHITE IP20 ♦	15	520						
DURASTRIP RGB + WHITE IP68 ♦	15	520						
DURASTRIP EXTRA NARROW RGB	14,4	--		120				

♦ Only available with MOQ (20 Reels of 5mt): contact sales department for more information.

♦ For DURASTRIP COB available only with MOQ (300 Reels of 5 mt) contact sales department for more information.

	4000K	6000K			L	H	L1		
	4000	◆ 6000	120°	BASIC	G3	5000	1,7	5 - 8	50
	4000	6000	120°	BASIC	G2	5000	4	10	7,14
	4000	6000	120°	BASIC	G2	4000-5000	1	8 - 10	7,14
	4000	6000	120°	BASIC	G2	4000-5000	1	10	4,16
	4000	6000	120°	BASIC	G2	5000	4	12	4,16
	4000	6000	120°	BASIC	G2	4000-5000	2,3	8 - 10	100 - 50
	4000	6000	120°	BASIC	G2	4000-5000	5	11 - 13	100 - 50
	4000	◆ 6000	120°	PRO	G5h24	5000	2	10	8
	4000	◆ 6000	120°	PRO	G5h24	5000	5	(10) 12 (23)	8
	4000	◆ 6000	120°	PRO	G5h24	5000	1	10	25 / 33,3
	4000	◆ 6000	120°	PRO	G5h24	5000	5	12	25 - 33,33
	4000	◆ 6000	120°	PRO	G5h24	5000	1	10	10; 62,5; 50; 33,3
	4000	◆ 6000	120°	PRO	G5h24	5000	4	12	10; 62,5; 50; 33,3
	4000	◆ 6000	120°	PRO	G5h24	5000	2	10	62,5; 33,3
	4000	◆ 6000	120°	PRO	G5h24	5000	4	12	62,5; 33,3
	◆ 4000		120°	PRO	G5h24	5000	1,7	25	50
	4000	◆ 6000	120°	PRO	G5h24	5000	1	5	20 - 33,33
	4000	◆ 6000	120°	PRO	G5h24	5000	4	8	20
	◆ 4000	◆ 6000	120°	PRO	G5h24	5000	1,5	8	25
	◆ 4000	◆ 6000	120°	PRO	G5h24	5000	1	6	100
			120°	PRO	G5h24	20000	1,7	10	41,67
			120°	PRO	G5h24	20000	5	12	41,67
			120°	PRO	G5h24	50000	2	12	166,67
			120°	PRO	G5h24	50000	5	14	166,67
	◆ 4000	◆ 6000	100°x70° (40°+30°)	PRO	G3	5000	11	23	166,6
	◆ 4000	◆ 6000	30°	PRO	G3	5000	11	23	166,6
	◆ 4000	◆ 6000	120°	PRO	G5h24	5000	1	10	25
	◆ 4000	6000	120°	PRO	G5h24	5000	5	12	25
			120°	PRO	G5h24	5000	1	10	50
			120°	PRO	G5h24	5000	5	12	50
			120°	PRO	G5h24	5000	1	12	62,5
			120°	PRO	G5h24	5000	4	14	62,5
			120°	PRO	G5h24	5000	2	15	125
			120°	PRO	G5h24	5000	5	17	125
			120°	PRO	G5h24	5000	4	12	50
			120°	PRO	G5h24	5000	2	10	100
			120°	PRO	G5h24	5000	4	14	100
			120°	PRO	G3	5000	3 - 5	13 - 15	71,42
			120°	PRO	G3	5000	5	15	71,42 - 166,67
			120°	PRO	G5h24	3000	3,5	6	50

DURASTRIP COB

DURASTRIP COB

FEATURES

The construction structure of COB strips allows the LEDs to be applied on the substrate in a continuous manner, optimizing all the space: the result is a continuous line of light, emphasized by the phosphate cover.

The type of LEDs used emit less heat than the CHiPs normally used for strips, allowing very high efficiency and strong brightness even at low wattages.

INSTALLATION

Complete with double-sided tape to attach to the surface. When using double-sided tape degrease the application surface adequately.

USAGE INFORMATION

Dimmable 0-100% Flicker Free

DALI - DMX - 1-10

Analogue and digital domotic control systems

Push Dali with ZKCDAFF controllers

CASAMBI compatible

PACKAGING

Packaged in 5 meters reels.

LED

320 LED/m

Ra>90

Lifetime: 25,000h

Warranty: 3 years

CONNECTIONS

IP20: terminals with free wires.

Maximum connection length 5 m. Max 4A.

Strips can be cut to size by following the cutting indications printed on the strips.



CUSTOM PRODUCTIONS

See details at the beginning of Linear Systems

Cutting DuraStrip to size*:

Fixed cost of piece work

* Respect the cutting pitch. Supplied with 15 cm cable.




VA01


LED SPACING AND PITCH CUT



DURASTRIP COB

DURASTRIP COB

BASIC	24 Vdc	Ra 90		25000 h L70B20	IP20	-25°C +35°C	Risk Group 0			
--------------	--------	-------	---	-------------------	------	----------------	-----------------	--	---	---

W	W/m	lm/m	K	LED/ m	L	L1	H		ART.
35	7	600	2700	320	5000	5	1.7	1 / 1	03U272407INCB
35	7	650	3000	320	5000	5	1.7	1 / 1	03U302407INCB
35	7	650	3500	320	5000	5	1.7	1 / 1	03U352407INCB ♦
35	7	790	4000	320	5000	5	1.7	1 / 1	03U402407INCB
35	7	790	6000	320	5000	5	1.7	1 / 1	03U602407INCB ♦
50	10	890	2700	320	5000	8	1.7	1 / 1	03U272410INCB
50	10	920	3000	320	5000	8	1.7	1 / 1	03U302410INCB
50	10	920	3500	320	5000	8	1.7	1 / 1	03U352410INCB ♦
50	10	1030	4000	320	5000	8	1.7	1 / 1	03U402410INCB
50	10	1030	6000	320	5000	8	1.7	1 / 1	03U602410INCB ♦

♦ Only available with MOQ (300 Reels of 5 mt); contact sales department for more information.

DURASTRIP SELECT

DURASTRIP SELECT 140

DURASTRIP SELECT were designed to satisfy the range of use that requires an excellent product as well as cost optimization.

The SELECT range is produced with a single circuit substrate, a leaner production that takes advantage of production progress to obtain efficient strips with excellent light emission and colour control over time.

Available in an IP20 and IP65 version.

INSTALLATION

The 25W and 60W strips can be installed directly on the application surface using the included double-sided 3M adhesive or bridges: we recommend the using aluminium profiles only with the 96W strips, in order to optimize heat dissipation.

When using double-sided tape degrease the application surface adequately.

USAGE INFORMATION

Dimmable 0-100% Flicker Free

DALI - DMX - 1-10

Analogue and digital domotic control systems

Push Dali with ZKCDAFF controllers

CASAMBI compatible

POWER SUPPLY

Max current for single power supply: 4A.

PACKAGING

Packaged in 5 meters reels.

The 24W/m=96W strip is packaged in a 4 m reel.

LED

LED 2835

140 LED/m

CONNECTIONS

IP20: terminals with free wires.

IP65: complete with a 15 cm long IP65 M/F cable on 2 sides.

For longer connections, connect in series or parallel.

Strips can be cut to size by following the cutting indications printed on the strips.

For IP65 strips, restore the IP protection after cutting.



CUSTOM PRODUCTIONS

See details at the beginning of Linear Systems

Cutting DuraStrip to size*:


Fixed cost of piece work

* Respect the cutting pitch. Supplied with 15 cm cable.








VA01

LED SPACING AND PITCH CUT









DURASTRIP SELECT

DURASTRIP SELECT 140


BASIC	24 Vdc	Ra 90		30000 h L70B20	IP20	-25°C +35°C	Risk Group 0		 120°		
--------------	--------	-------	---	-------------------	------	----------------	-----------------	---	---	---	---

DURASTRIP SELECT 140 IP20

W	W/m	lm/m	K	LED/ m	L	L1	H		ART.
70	14	1300	3000	140	5000	8	1	1 / 20	01U302414IN-MB
70	14	1330	4000	140	5000	8	1	1 / 20	01U402414IN-MB
70	14	1400	6000	140	5000	8	1	1 / 20	01U602414IN-MB
96	24	1950	3000	140	4000	10	1	1 / 20	01U302424IN-MB
96	24	2050	4000	140	4000	10	1	1 / 20	01U402424IN-MB
96	24	2150	6000	140	4000	10	1	1 / 20	01U602424IN-MB

BASIC	24 Vdc	Ra 90		30000 h L70B20	IP65	-25°C +35°C	Risk Group 0		 120°		
--------------	--------	-------	---	-------------------	------	----------------	-----------------	---	---	---	---

DURASTRIP SELECT 140 IP65

W	W/m	lm/m	K	LED/ m	L	L1	H		ART.
70	14	1300	3000	140	5000	10	4	1 / 10	01U302414EX-MB
70	14	1330	4000	140	5000	10	4	1 / 10	01U402414EX-MB
70	14	1400	6000	140	5000	10	4	1 / 10	01U602414EX-MB

DURASTRIP SELECT

DURASTRIP SELECT 240

DURASTRIP SELECT were designed to satisfy the range of use that requires an excellent product as well as cost optimization.

The SELECT range is produced with a single circuit substrate, a leaner production that takes advantage of production progress to obtain efficient strips with excellent light emission and colour control over time.

Available in an IP20 and IP65 version.

INSTALLATION

Complete with 3M double-sided tape to attach to the surface and jumpers to be screwed to the surface.

When using double-sided tape degrease the application surface adequately.

We recommend the using aluminium profiles only with the 96W strips, in order to optimize heat dissipation.

USAGE INFORMATION

Dimmable 0-100% Flicker Free

DALI - DMX - 1-10

Analogue and digital domotic control systems

Push Dali with ZKCDAFF controllers

CASAMBI compatible

POWER SUPPLY

Max current for single power supply: 4A.

PACKAGING

Packaged in 5 meters reels.

The 19W/m=76W strip and the 24W/m=96W strip are packaged in 4 m reels.

LED

LED 2835

240 LED/m

CONNECTIONS

IP20: terminals with free wires.

IP65: complete with a 15 cm long IP65 M/F cable on 2 sides.

For longer connections, connect in series or parallel, see diagram.

Strips can be cut to size by following the cutting indications printed on the strips.

For IP65 strips, restore the IP protection after cutting.



CUSTOM PRODUCTIONS

See details at the beginning of Linear Systems

Cutting DuraStrip to size*:


Fixed cost of piece work

* Respect the cutting pitch. Supplied with 15 cm cable.








VA01

LED SPACING AND PITCH CUT








DURASTRIP SELECT

DURASTRIP SELECT 240

BASIC	24 Vdc	Ra 90		30000 h L70B20	IP20	-25°C +35°C	Risk Group 0				
--------------	--------	-------	---	-------------------	------	----------------	-----------------	---	---	---	---

DURASTRIP SELECT 240 IP20

W	W/m	lm/m	K	LED/ m	L	L1	H		ART.
55	11	1050	3000	240	5000	10	1	1 / 20	01U302411IN-TB
55	11	1100	4000	240	5000	10	1	1 / 20	01U402411IN-TB
55	11	1150	6000	240	5000	10	1	1 / 20	01U602411IN-TB
70	14	1300	3000	240	5000	10	1	1 / 20	01U302414IN-TB
70	14	1330	4000	240	5000	10	1	1 / 20	01U402414IN-TB
70	14	1400	6000	240	5000	10	1	1 / 20	01U602414IN-TB
76	19	1650	3000	240	4000	10	1	1 / 20	01U302419IN-TB
76	19	1710	4000	240	4000	10	1	1 / 20	01U402419IN-TB
76	19	1800	6000	240	4000	10	1	1 / 20	01U602419IN-TB
96	24	2000	3000	240	4000	10	1	1 / 20	01U302424IN-TB
96	24	2100	4000	240	4000	10	1	1 / 20	01U402424IN-TB
96	24	2200	6000	240	4000	10	1	1 / 20	01U602424IN-TB

BASIC	24 Vdc	Ra 90		30000 h L70B20	IP65	-25°C +35°C	Risk Group 0				
--------------	--------	-------	---	-------------------	------	----------------	-----------------	---	---	---	---

DURASTRIP SELECT 240 IP65

W	W/m	lm/m	K	LED/ m	L	L1	H		ART.
55	11	1050	3000	240	5000	12	4	1 / 10	01U302411EX-TB
55	11	1100	4000	240	5000	12	4	1 / 10	01U402411EX-TB
55	11	1150	6000	240	5000	12	4	1 / 10	01U602411EX-TB
70	14	1300	3000	240	5000	12	4	1 / 10	01U302414EX-TB
70	14	1330	4000	240	5000	12	4	1 / 10	01U402414EX-TB
70	14	1400	6000	240	5000	12	4	1 / 10	01U602414EX-TB

DURASTRIP SELECT

DURASTRIP SELECT IP20

DURASTRIP SELECT were designed to satisfy the range of use that requires an excellent product as well as cost optimization.

The SELECT range is produced with a single circuit substrate, a leaner production that takes advantage of production progress to obtain efficient strips with excellent light emission and colour control over time.

Available in an IP20 and IP65 version.

INSTALLATION

The 25W and 60W strips can be installed directly on the application surface using the included double-sided 3M adhesive or bridges: we recommend the using aluminium profiles only with the 96W strips, in order to optimize heat dissipation.

When using double-sided tape degrease the application surface adequately.

USAGE INFORMATION

Dimmable 0-100% Flicker Free

DALI - DMX - 1-10

Analogue and digital domotic control systems

Push Dali with ZKCDAFF controllers

CASAMBI compatible

POWER SUPPLY

Max current for single power supply: 4A.

PACKAGING

Packaged in 5 meters reels.

The 24W/m=96W strip is packaged in a 4 m reel.

LED

LED 2835

CONNECTIONS

Free wires.

Strips can be cut to size by following the cutting indications printed on the strips.



CUSTOM PRODUCTIONS

See details at the beginning of Linear Systems

Cutting Durastrip to size*:

Fixed cost of piece work

* Respect the cutting pitch. Supplied with 15 cm cable.



VA01






LED SPACING AND PITCH CUT


5W/m, 12W/m



DURASTRIP SELECT


DURASTRIP SELECT IP20

BASIC	24 Vdc	Ra >90		30000 h L70B20	IP20	-25°C +35°C	Risk Group 0			120°		
--------------	--------	--------	---	-------------------	------	----------------	-----------------	---	---	------	---	---

W	W/m	lm/m	K	LED/ m	L	L1	H		ART.
25	5	500	2700	60	5000	8	2,3	1 / 20	05U272405IN
25	5	520	3000	60	5000	8	2,3	1 / 20	05U302405IN
25	5	560	4000	60	5000	8	2,3	1 / 20	05U402405IN
25	5	560	4000	60	5000	8	2,3	1 / 20	05U402405IN
60	12	1100	2700	60	5000	10	2,3	1 / 20	05U272412IN
60	12	1160	3000	60	5000	10	2,3	1 / 20	05U302412IN
60	12	1210	4000	60	5000	10	2,3	1 / 20	05U402412IN
60	12	1210	6000	60	5000	10	2,3	1 / 20	05U652412IN
96	24	2040	2700	124	4000	10	2,3	1 / 20	05U272424IN
96	24	2100	3000	124	4000	10	2,3	1 / 20	05U302424IN
96	24	2250	4000	124	4000	10	2,3	1 / 20	05U402424IN
96	24	2250	6000	124	4000	10	2,3	1 / 20	05U652424IN

IP20 CONNECTOR




		ART.
IP20 connector for 25W strips	1 / 1	KT05IN-CON
IP20 connector for 60W strips	1 / 1	KT05IN-CON-HP

DURASTRIP SELECT IP20 connector (5 pcs).

CONNECTORS




		ART.
IP20 junction connector for 25W strips	1 / 1	KT05IN-JUN
IP20 junction connector for 60W strips	1 / 1	KT05IN-JUN-HP

DURASTRIP SELECT IP20 accessories (5 pcs).

ADDITIONAL CUT AND MOUNT KIT FOR STRIP IP20



		ART.
Additional cut and mount kit for Strip IP20	1 / 1	KT7500

4 terminal blocks - 15 cm wire - 8 terminal blocks - 12 silicone fixing bridges with screws.
Compatible only with art. 07U272405IN-SB or with 96 W items of the 05U range.

DURASTRIP SELECT

DURASTRIP SELECT IP65

DURASTRIP SELECT were designed to satisfy the range of use that requires an excellent product as well as cost optimization.

The SELECT range is produced with a single circuit substrate, a leaner production that takes advantage of production progress to obtain efficient strips with excellent light emission and colour control over time.

Available in an IP20 and IP65 version.

INSTALLATION

The 25W and 60W strips can be installed directly on the application surface using the included double-sided 3M adhesive or bridges: we recommend the using aluminium profiles only with the 96W strips, in order to optimize heat dissipation.

When using double-sided tape degrease the application surface adequately.

USAGE INFORMATION

Dimmable 0-100% Flicker Free

DALI - DMX - 1-10

Analogue and digital domotic control systems

Push Dali with ZKCD AFF controllers

CASAMBI compatible

POWER SUPPLY

Max current for single power supply: 4A.

PACKAGING

Packaged in 5 meters reels.

The 24W/m=96W strip is packaged in a 4 m reel.

CONNECTIONS

IP65: complete with a 15 cm long IP65 M/F cable on 2 sides.

Strips can be cut to size by following the cutting indications printed on the strips.

For IP65/IP68 strips, restore the IP protection after cutting.



CUSTOM PRODUCTIONS

See details at the beginning of Linear Systems

Cutting DuraStrip to size*:

Fixed cost of piece work

* Respect the cutting pitch. Supplied with 15 cm cable.



VA01

LED SPACING AND PITCH CUT

5W/m, 12W/m





DURASTRIP SELECT

DURASTRIP SELECT IP65

BASIC	24 Vdc	Ra >90		30000 h L70B20	IP65	-25°C +35°C	Risk Group 0				
--------------	--------	--------	--	-------------------	------	----------------	-----------------	--	--	--	--

W	W/m	lm/m	K	LED/ m	L	L1	H		ART.
25	5	490	2700	60	5000	11	5	1 / 10	05U272405EX
25	5	505	3000	60	5000	11	5	1 / 10	05U302405EX
25	5	545	4000	60	5000	11	5	1 / 10	05U402405EX
25	5	545	6000	60	5000	11	5	1 / 10	05U652405EX
60	12	1075	2700	60	5000	13	5	1 / 10	05U272412EX
60	12	1130	3000	60	5000	13	5	1 / 10	05U302412EX
60	12	1180	4000	60	5000	13	5	1 / 10	05U402412EX
60	12	1180	6000	60	5000	13	5	1 / 10	05U652412EX
96	24	1980	2700	124	4000	13	5	1 / 10	05U272424EX
96	24	2040	3000	124	4000	13	5	1 / 10	05U302424EX
96	24	2180	4000	124	4000	13	5	1 / 10	05U402424EX
96	24	2180	6000	124	4000	13	5	1 / 10	05U652424EX

FEMALE CONNECTOR IP65/68



IP65/68 female connector

DURASTRIP SELECT IP65 female connector (5 pcs).



1 / 1



KT05EX-FC

M/F IP65/68 CONNECTOR



IP65/68 M/F connector

DURASTRIP SELECT IP65 male-female connectors (5 pcs).



1 / 1



KT05EX-FMC

IP65 CONNECTOR



IP65 connector

DURASTRIP SELECT IP65 female connector with 2 male output (2 pcs).



1 / 1



KT05EX-2FMC

IP65/68 CONNECTOR



IP65 connector

DURASTRIP SELECT IP65 female connector with 3 male output (2 pcs).



1 / 1



KT05EX-3FMC

Accessories

DURASTRIP SELECT IP65

CUT KIT



IP65/68 cut kit



1 / 1



KT05EX-CK

DURASTRIP SELECT IP65 cutting kit (10 end caps + silicone + 10 clips).



THE BEAUTY OF LIGHT

Capilla Hacienda Las Marías - Bogotá - Colombia



[see more projects](#)



DURASTRIP

DURASTRIP PRO IP20

DURASTRIP PRO uses “copper shielded” technology (complete copper coating on the circuit on both sides of the support) designed by our Research and Development Laboratory: the increased quantity of copper improves thermal management and ensures a longer life.

DURASTRIP PRO are produced with a dual circuit substrate: the power distributed to every circuit is less, the temperature is halved and the risk of power failures is eliminated. Using LED 3528 limits the colour shifting effect on the beam emission angles.

INSTALLATION

Complete with 3M double-sided tape to attach to the surface and jumpers to be screwed to the surface. When using double-sided tape degrease the application surface adequately.

USAGE INFORMATION

Dimmable 0-100% Flicker Free
DALI - DMX - 1-10
Analogue and digital domotic control systems
Push Dali with ZKCAFF controllers
CASAMBI compatible

PACKAGING

Packaged in 5 meters reels.

LED

LED 3528
120 LED/m
Ra>95
Lifetime: >60,000h
Warranty: 5 years

COLOUR OF THE LIGHT

Choice of white colour temperatures.

BINNING

ANSI/SDCM: 2 step.

CONNECTIONS

IP20: terminals with free wires.
Maximum connection length 5 m. Max 4A.
For longer connections, connect in series or in parallel, see diagram in Info Tech.
Strips can be cut to size by following the cutting indications printed on the strips.



CUSTOM PRODUCTIONS

See details at the beginning of Linear Systems

Cutting DuraStrip to size*:

Fixed cost of piece work

* Respect the cutting pitch. Supplied with 15 cm cable.








VA01


LED SPACING AND PITCH CUT



DURASTRIP

DURASTRIP PRO IP20

PRO	24 Vdc	*Ra >80	Ra >95		*30000 h L70	60000 h L70B20	IP20	-25°C +35°C	Risk Group 0				
------------	--------	---------	--------	---	-----------------	-------------------	------	----------------	-----------------	---	---	---	---

W	W/m	lm/m	K	LED/ m	L	L1	H		ART.
24	5	300	2700	60	5000	10	2	1 / 20	07U272405IN-SB *
25	5	340	2200	120	5000	10	2	20 / 20	07U222405IN ♦
25	5	390	2700	120	5000	10	2	1 / 20	07U272405IN
25	5	410	3000	120	5000	10	2	1 / 20	07U302405IN
25	5	430	3500	120	5000	10	2	20 / 20	07U352405IN ♦
25	5	450	4000	120	5000	10	2	1 / 20	07U402405IN
25	5	450	6000	120	5000	10	2	20 / 20	07U602405IN ♦
45	10	850	2200	120	5000	10	2	20 / 20	07U222410IN ♦
45	10	850	2700	120	5000	10	2	1 / 20	07U272410IN
45	10	850	3000	120	5000	10	2	1 / 20	07U302410IN
45	10	850	3500	120	5000	10	2	20 / 20	07U352410IN ♦
45	10	900	4000	120	5000	10	2	1 / 20	07U402410IN
45	10	900	6000	120	5000	10	2	20 / 20	07U602410IN ♦
60	12	1150	2200	120	5000	10	2	20 / 20	07U222412IN ♦
60	12	1150	2700	120	5000	10	2	1 / 20	07U272412IN
60	12	1150	3000	120	5000	10	2	1 / 20	07U302412IN
60	12	1150	3500	120	5000	10	2	20 / 20	07U352412IN ♦
60	12	1200	4000	120	5000	10	2	1 / 20	07U402412IN
60	12	1200	6000	120	5000	10	2	20 / 20	07U602412IN ♦
75	15	1350	2200	120	5000	10	2	20 / 20	07U222415IN ♦
75	15	1350	2700	120	5000	10	2	1 / 20	07U272415IN
75	15	1350	3000	120	5000	10	2	1 / 20	07U302415IN
75	15	1350	3500	120	5000	10	2	20 / 20	07U352415IN ♦
75	15	1400	4000	120	5000	10	2	1 / 20	07U402415IN
75	15	1400	6000	120	5000	10	2	20 / 20	07U602415IN ♦

♦ Only available with MOQ (20 Reels of 5mt): contact sales department for more information.

ADDITIONAL CUT AND MOUNT KIT FOR STRIP IP20



Additional cut and mount kit for Strip IP20



1 / 1

ART.

KT2PA

Additional cut and mount kit for Strip IP20.

This includes 4 terminal blocks with 15 cm wire, 10 silicone fixing bridges with screws.



Additional cut and mount kit for Strip IP20



1 / 1

ART.

KT7500

4 terminal blocks - 15 cm wire - 8 terminal blocks - 12 silicone fixing bridges with screws.
Compatible only with art. 07U272405IN-SB or with 96 W items of the 05U range.

DURASTRIP

DURASTRIP PRO IP68

DURASTRIP PRO uses "copper shielded" technology (complete copper coating on the circuit on both sides of the support) designed by our Research and Development Laboratory: the increased quantity of copper improves thermal management and ensures a longer life.

DURASTRIP PRO are produced with a dual circuit substrate: the power distributed to every circuit is less, the temperature is halved and the risk of power failures is eliminated.

LED density constant on all powers: minimising the "dot" effect even with a grazing light.

Using LED 3528 limits the colour shifting effect on the beam emission angles.

Thanks to the new extrusion technology the colour temperature of DURASTRIP PRO IP68 is EXACTLY the same as DURASTRIP PRO IP20.

A big advantage that makes it possible to use strips with different IP ratings in adjacent surroundings with the certainty of maintaining a constant light colour and the required effect.

INSTALLATION

Complete with 3M double-sided tape to attach to the surface and jumpers to be screwed to the surface.

When using double-sided tape degrease the application surface adequately.

USAGE INFORMATION

Dimmable 0-100% Flicker Free

DALI - DMX - 1-10

Analogue and digital domotic control systems

Push Dali with ZKCDAFF controllers

CASAMBI compatible

PACKAGING

Packaged in 5 meters reels.

LED

LED 3528

128 LED/m - 240 LED/m

Ra>95

Lifetime: >60,000h

Warranty: 5 years

COLOUR OF THE LIGHT

Choice of white colour temperatures.

BINNING

ANSI/SDCM: 2 step.

CONNECTIONS

Complete with a 15 cm long IP65/68 M/F cable on 2 sides.

Maximum connection length 5 m. Max 4A.

For longer connections, connect in series or parallel, see diagram.

Strips can be cut to size by following the cutting indications printed on the strips.

For IP65/IP68 strips, restore the IP protection after cutting.



CUSTOM PRODUCTIONS

See details at the beginning of Linear Systems

Cutting DuraStrip to size*:

Fixed cost of piece work

* Respect the cutting pitch. Supplied with 15 cm cable.








VA01

LED SPACING AND PITCH CUT




DURASTRIP

DURASTRIP PRO IP68

PRO	24 Vdc	*Ra >80	Ra >95		*30000 h L70	60000 h L70B20	IP20	-25°C +35°C	Risk Group 0				
------------	--------	---------	--------	---	-----------------	-------------------	------	----------------	-----------------	---	---	---	---

New

W	W/m	lm/m	K	LED/ m	L	L1	H		ART.
24	5	300	3000	60	5000	12	5	1 / 10	07U302405XO-SB *
24	5	300	4000	120	5000	12	5	1 / 10	07U402405XO-SB *
25	5	340	2200	120	5000	12	5	20 / 20	07U222405XO ♦
25	5	390	2700	120	5000	12	5	1 / 10	07U272405XO
25	5	410	3000	120	5000	12	5	1 / 10	07U302405XO
25	5	430	3500	120	5000	12	5	20 / 20	07U352405XO ♦
25	5	450	4000	120	5000	12	5	1 / 10	07U402405XO
25	5	450	6000	120	5000	12	5	20 / 20	07U602405XO ♦
45	10	850	2200	120	5000	12	5	20 / 20	07U222410XO ♦
45	10	850	2700	120	5000	12	5	1 / 10	07U272410XO
45	10	850	3000	120	5000	12	5	1 / 10	07U302410XO
45	10	850	3500	120	5000	12	5	20 / 20	07U352410XO ♦
45	10	900	4000	120	5000	12	5	1 / 10	07U402410XO
45	10	900	6000	120	5000	12	5	20 / 20	07U602410XO ♦
60	12	1150	2200	120	5000	12	5	20 / 20	07U222412XO ♦
60	12	1150	2700	120	5000	12	5	1 / 10	07U272412XO
60	12	1150	3000	120	5000	12	5	1 / 10	07U302412XO
60	12	1150	3500	120	5000	12	5	20 / 20	07U352412XO ♦
60	12	1200	4000	120	5000	12	5	1 / 10	07U402412XO
60	12	1200	6000	120	5000	12	5	20 / 20	07U602412XO ♦
75	15	1350	2200	120	5000	12	5	20 / 20	07U222415XO ♦
75	15	1350	2700	120	5000	12	5	1 / 10	07U272415XO
75	15	1350	3000	120	5000	12	5	1 / 10	07U302415XO
75	15	1350	3500	120	5000	12	5	20 / 20	07U352415XO ♦
75	15	1400	4000	120	5000	12	5	1 / 10	07U402415XO
75	15	1400	6000	120	5000	12	5	20 / 20	07U602415XO ♦
150	30	2500	3000	240	5000	23	5	1 / 10	07U302430XO *(1)


♦ Only available with MOQ (20 Reels of 5mt): contact sales department for more information.

* Ra80 Single circuit: L70 = 30.000h. Warranty 3 years.

(1) We recommend using it with aluminium profiles to optimise heat dissipation. Item with free wires (without connector).

ADDITIONAL CUT AND MOUNT KIT FOR STRIP IP68



	ART.
Additional cut and mount kit for Strip IP68	1 / 1
	KT68PA

Additional cut and mount kit for Strip IP68 and IP65.

This kit includes 4 terminal blocks with 15 cm wire, 10 silicone fixing bridges with screws.

DURASTRIP

DURASTRIP PRO240 IP20

PRO240 is a range of strips with significant power, up to 24W/m. With an efficiency of 110lm/W and thanks to a narrow space between the LED sources, PRO240 is the strip to use when strong light emission is required, for example for installations at great heights.

At the same time it guarantees extreme uniformity and colour reliability, made superlative by Ra>95.

PRO240 are new generation strips which are increasingly efficient and reliable over time.

Available in an IP20 and IP65 version.

INSTALLATION

Complete with 3M double-sided tape to attach to the surface and jumpers to be screwed to the surface.

When using double-sided tape degrease the application surface adequately.

Always use with aluminium profiles for heat dissipation.

USAGE INFORMATION

Dimmable 0-100%

DALI - DMX - 1-10

Analogue and digital domotic control systems

Push Dali with ZKCDIFF controllers

CASAMBI compatible

PACKAGING

Packaged in 5 meters reels.

LED

LED 2835

240 LED/m

Ra>90

Lifetime: >50,000h

Warranty: 5 years

COLOUR OF THE LIGHT

Choice of white colour temperatures.

BINNING

ANSI/SDCM: 3 step.


CONNECTIONS

IP20: terminals with free wires.

Maximum connection length 5 m.

For longer connections, connect in series or parallel, see diagram.

Strips can be cut to size by following the cutting indications printed on the strips.

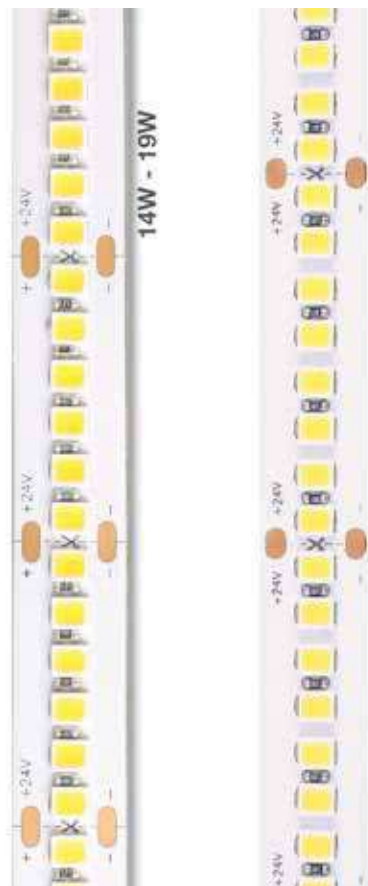

CUSTOM PRODUCTIONS

See details at the beginning of Linear Systems

Cutting DuraStrip to size*:



Fixed cost of piece work

* Respect the cutting pitch. Supplied with 15 cm cable.



VA01

LED SPACING AND PITCH CUT

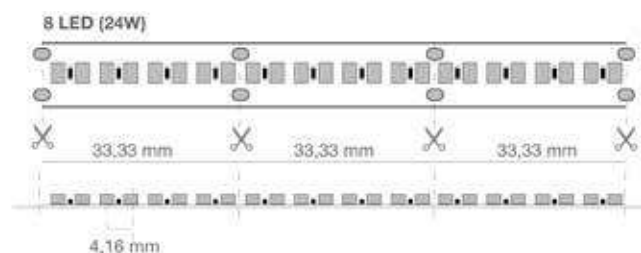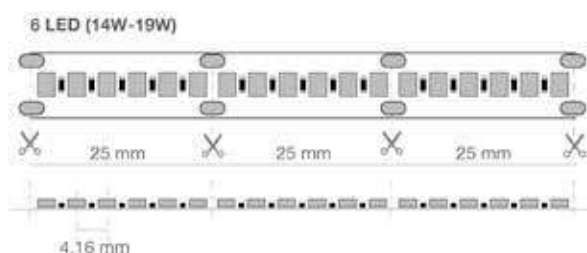

DURASTRIP

DURASTRIP PRO240 IP20



W	W/m	lm/m	K	LED/m	L	L1	H		ART.
70	14	1260	2700	240	5000	10	1	1 / 20	07U272414IN-TB
70	14	1330	3000	240	5000	10	1	1 / 20	07U302414IN-TB
70	14	1330	3500	240	5000	10	1	20 / 20	07U352414IN-TB ♦
70	14	1400	4000	240	5000	10	1	1 / 20	07U402414IN-TB
70	14	1400	6000	240	5000	10	1	1 / 20	07U602414IN-TB
95	19	1620	2700	240	5000	10	1	1 / 20	07U272419IN-TB
95	19	1710	3000	240	5000	10	1	1 / 20	07U302419IN-TB
96	19	1710	3500	240	5000	10	1	20 / 20	07U352419IN-TB ♦
95	19	1800	4000	240	5000	10	1	1 / 20	07U402419IN-TB
95	19	1800	6000	240	5000	10	1	1 / 20	07U602419IN-TB
120	24	1980	2700	240	5000	10	1	1 / 20	07U272424IN-TB
120	24	2090	3000	240	5000	10	1	1 / 20	07U302424IN-TB
120	24	2090	3500	240	5000	10	1	20 / 20	07U352424IN-TB ♦
120	24	2200	4000	240	5000	10	1	1 / 20	07U402424IN-TB
120	24	2200	6000	240	5000	10	1	1 / 20	07U602424IN-TB

♦ Only available with MOQ (20 Reels of 5mt): contact sales department for more information.

DURASTRIP

DURASTRIP PRO240 IP65

PRO240 is a range of strips with significant power, up to 24W/m. With an efficiency of 110lm/W and thanks to a narrow space between the LED sources, PRO240 is the strip to use when strong light emission is required, for example for installations at great heights.

At the same time it guarantees extreme uniformity and colour reliability, made superlative by Ra>95.

PRO240 are new generation strips which are increasingly efficient and reliable over time.

Available in an IP20 and IP65 version.

INSTALLATION

Complete with 3M double-sided tape to attach to the surface and jumpers to be screwed to the surface.

When using double-sided tape degrease the application surface adequately.

Always use with aluminium profiles for heat dissipation.

USAGE INFORMATION

Dimmable 0-100%

DALI - DMX - 1-10

Analogue and digital domotic control systems

Push Dali with ZKCD AFF controllers

CASAMBI compatible

PACKAGING

Packaged in 5 meters reels.

LED

LED 2358

240 LED/m

Ra>90

Lifetime: >50,000h

Warranty: 5 years

COLOUR OF THE LIGHT

Choice of white colour temperatures.

BINNING

ANSI/SDCM: 3 step.


CONNECTIONS

IP65: complete with a 15 cm long IP65/68 M/F cable on 2 sides.

Maximum connection length 5 m.

For longer connections, connect in series or parallel, see diagram. Strips can be cut to size by following the cutting indications printed on the strips.

For IP65/IP68 strips, restore the IP protection after cutting.

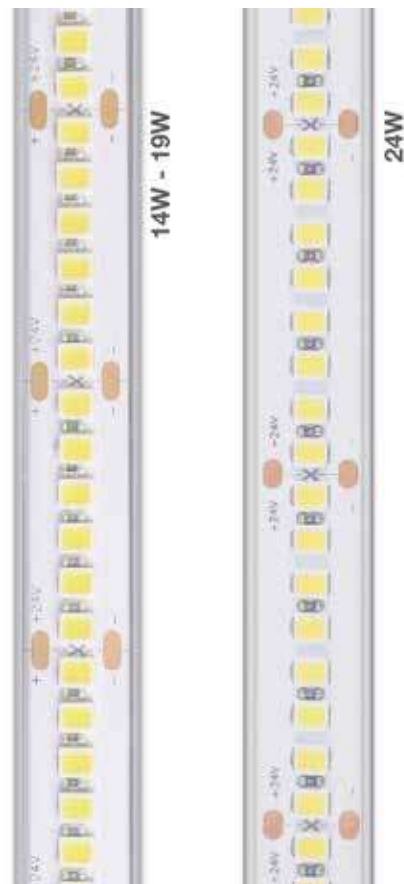

CUSTOM PRODUCTIONS

See details at the beginning of Linear Systems

Cutting DuraStrip to size*:



Fixed cost of piece work

* Respect the cutting pitch. Supplied with 15 cm cable.



VA01

LED SPACING AND PITCH CUT

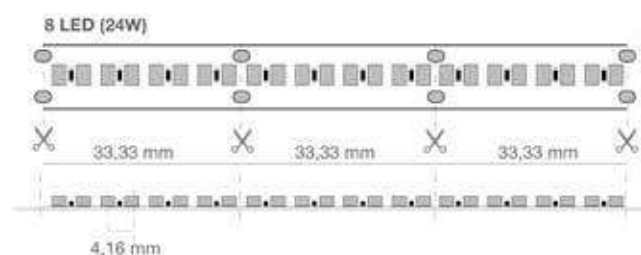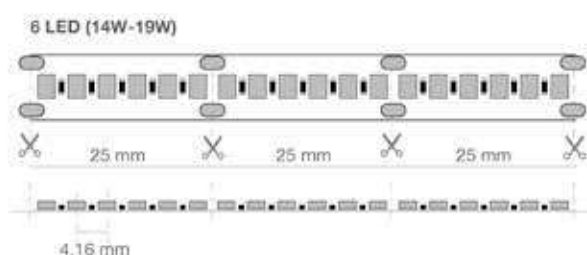

DURASTRIP

DURASTRIP PRO240 IP65



W	W/m	lm/m	K	LED/m	L	L1	H		ART.
70	14	1260	2700	240	5000	12	5	1 / 10	07U272414EX-TB
70	14	1330	3000	240	5000	12	5	1 / 10	07U302414EX-TB
70	14	1330	3500	240	5000	12	5	20 / 20	07U352414EX-TB ♦
70	14	1400	4000	240	5000	12	5	1 / 10	07U402414EX-TB
70	14	1400	6000	240	5000	12	5	1 / 10	07U602414EX-TB
95	19	1620	2700	240	5000	12	5	1 / 10	07U272419EX-TB
95	19	1710	3000	240	5000	12	5	1 / 10	07U302419EX-TB
96	19	1710	3500	240	5000	12	5	20 / 20	07U352419EX-TB ♦
95	19	1800	4000	240	5000	12	5	1 / 10	07U402419EX-TB
95	19	1800	6000	240	5000	12	5	1 / 10	07U602419EX-TB
120	24	1980	2700	240	5000	12	5	1 / 10	07U272424EX-TB
120	24	2090	3000	240	5000	12	5	1 / 10	07U302424EX-TB
120	24	2090	3500	240	5000	12	5	20 / 20	07U352424EX-TB ♦
120	24	2200	4000	240	5000	12	5	1 / 10	07U402424EX-TB
120	24	2200	6000	240	5000	12	5	1 / 10	07U602424EX-TB

ADDITIONAL CUT AND MOUNT KIT FOR STRIP IP68



Additional cut and mount kit for Strip IP68



1 / 1

ART.

KT68PA

Additional cut and mount kit for Strip IP68 and IP65.

This kit includes 4 terminal blocks with 15 cm wire, 10 silicone fixing bridges with screws.

DURASTRIP

DURASTRIP HIGH EFFICIENCY IP20

A high efficiency range to meet the needs of prestigious projects. With an efficiency of 180 lumens/watt, these strips emit from 1000 to 4000 lumens per metre, these strips are perfect for general lighting applications.

The High Efficiency line is characterised by excellent quality, reliability, high colour rendering, excellent white colour homogeneity, durability, long service life and great energy savings!

FEATURES

White shades: 3000K and 4000K available, other colour temperatures on request and with MOQ.

INSTALLATION

Complete with 3M double-sided tape to attach to the surface and jumpers to be screwed to the surface.

When using double-sided tape degrease the application surface adequately.

USAGE INFORMATION

Dimmable 0-100% Flicker Free

DALI - DMX - 1-10


Analogue and digital domotic control systems

Push Dali with ZKCDAFF controllers

CASAMBI compatible

CONNECTIONS

To connect in series or parallel, see diagram in Info Tech pages.

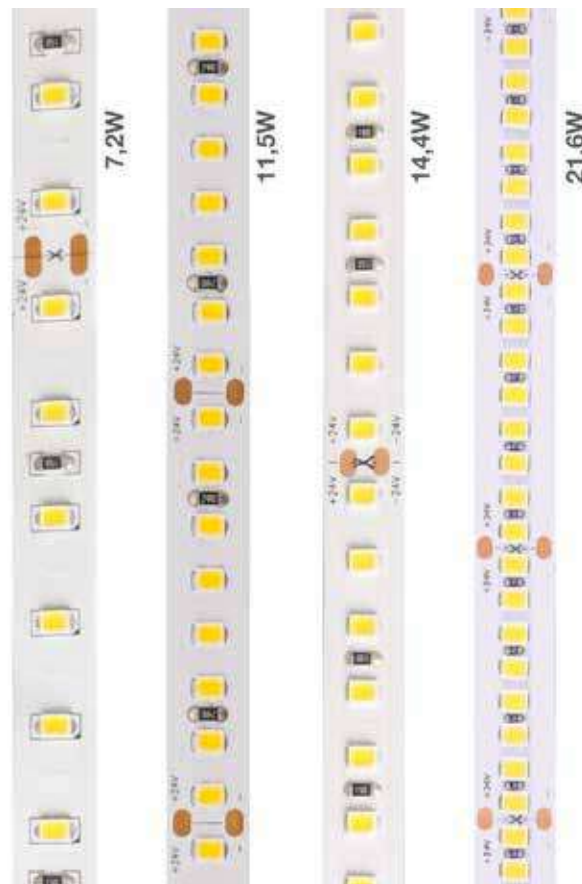

CUSTOM PRODUCTIONS

See details at the beginning of Linear Systems

Cutting DuraStrip to size*:

Fixed cost of piece work


* Respect the cutting pitch. Supplied with 15 cm cable.




VA01

LED SPACING AND PITCH CUT


8 LED (7,2W)

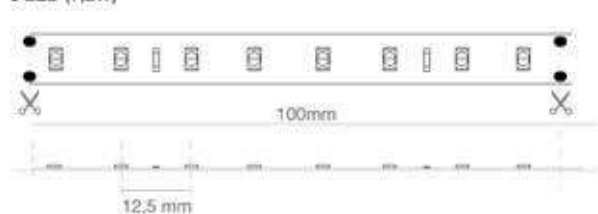


8 LED (11,5W)

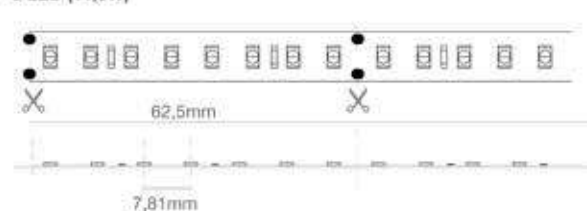

8 LED (14,4W)

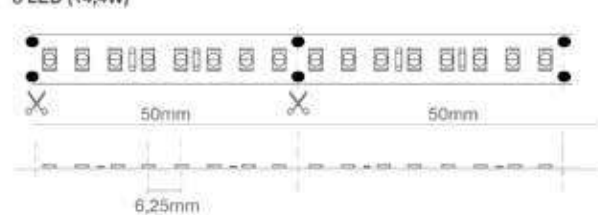


8 LED (21,6W)

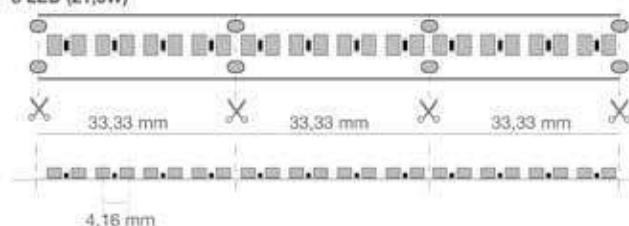

DURASTRIP

DURASTRIP HIGH EFFICIENCY IP20



W	W/m	lm/m	K	LED/m	L	L1	H		ART.
36	7.2	1188	2700	80	5000	10	1	1 / 20	07U272407INHE
36	7.2	1225	3000	80	5000	10	1	1 / 20	07U302407INHE
36	7.2	1225	3500	80	5000	10	1	20 / 20	07U352407INHE ♦
36	7.2	1265	4000	80	5000	10	1	1 / 20	07U402407INHE
36	7.2	1265	6000	80	5000	10	1	20 / 20	07U602407INHE ♦
58	11.5	1896	2700	128	5000	10	1	1 / 20	07U272411INHE
58	11.5	1955	3000	128	5000	10	1	1 / 20	07U302411INHE
58	11.5	1955	3500	128	5000	10	1	20 / 20	07U352411INHE ♦
58	11.5	2020	4000	128	5000	10	1	1 / 20	07U402411INHE
58	11.5	2020	6000	128	5000	10	1	20 / 20	07U602411INHE ♦
72	14.4	2377	2700	160	5000	10	1	1 / 20	07U272414INHE
72	14.4	2450	3000	160	5000	10	1	1 / 20	07U302414INHE
72	14.4	2450	3500	160	5000	10	1	20 / 20	07U352414INHE ♦
72	14.4	2530	4000	160	5000	10	1	1 / 20	07U402414INHE
72	14.4	2530	6000	160	5000	10	1	20 / 20	07U602414INHE ♦
108	21.6	3574	2700	240	5000	10	1	1 / 20	07U272421INHE
108	21.6	3685	3000	240	5000	10	1	1 / 20	07U302421INHE
108	21.6	3685	3500	240	5000	10	1	20 / 20	07U352421INHE ♦
108	21.6	3800	4000	240	5000	10	1	1 / 20	07U402421INHE
108	21.6	3800	6000	240	5000	10	1	20 / 20	07U602421INHE ♦

♦ Only available with MOQ (20 Reels of 5mt); contact sales department for more information.

DURASTRIP

DURASTRIP HIGH EFFICIENCY IP68

A high efficiency range to meet the needs of prestigious projects. With an efficiency of 180 lumens/watt, these strips emit from 1000 to 4000 lumens per metre, these strips are perfect for general lighting applications.

The High Efficiency line is characterised by excellent quality, reliability, high colour rendering, excellent white colour homogeneity, durability, long service life and great energy savings!

FEATURES

White shades: 3000K and 4000K available, other colour temperatures on request and with MOQ.

INSTALLATION

Complete with 3M double-sided tape to attach to the surface and jumpers to be screwed to the surface.

When using double-sided tape decrease the application surface adequately.

USAGE INFORMATION

Dimmable 0-100% Flicker Free

DALI - DMX - 1-10


Analogue and digital domotic control systems

Push Dali with ZKCAFF controllers

CASAMBI compatible

CONNECTIONS

To connect in series or parallel, see diagram in Info Tech pages.

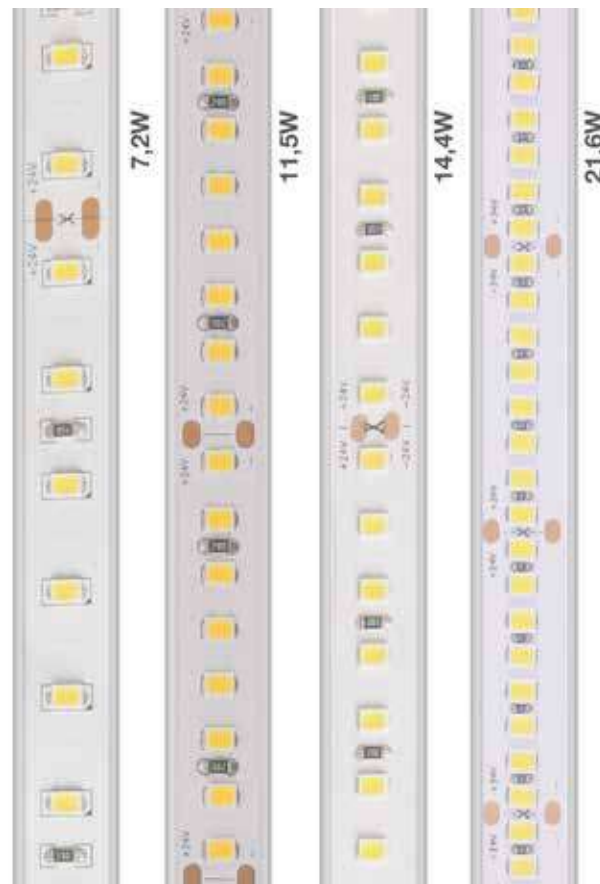

CUSTOM PRODUCTIONS

See details at the beginning of Linear Systems

Cutting DuraStrip to size*:

Fixed cost of piece work


* Respect the cutting pitch. Supplied with 30 cm cable.




VA01

LED SPACING AND PITCH CUT


8 LED (7,2W)

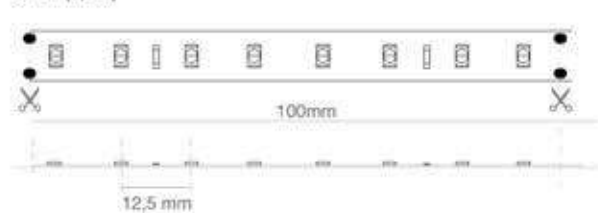


8 LED (11,5W)

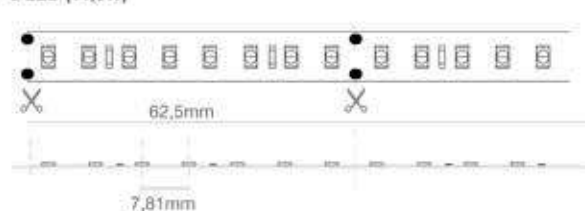

8 LED (14,4W)

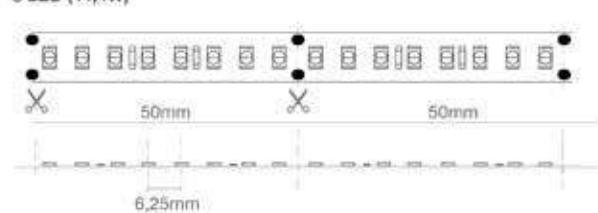


8 LED (21,6W)

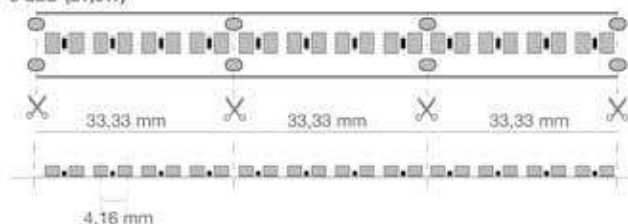

DURASTRIP

DURASTRIP HIGH EFFICIENCY IP68

PRO	24 Vdc	Ra 92		50000 h L70B20	IP68	-25°C +35°C	Risk Group 0				
------------	--------	-------	---	-------------------	------	----------------	-----------------	---	---	---	---

W	W/m	lm/m	K	LED/ m	L	L1	H		ART.
36	7.2	1188	2700	80	5000	12	4	1 / 10	07U272407XOHE
36	7.2	1225	3000	80	5000	12	4	1 / 10	07U302407XOHE
36	7.2	1225	3500	80	5000	12	4	20 / 20	07U352407XOHE ♦
36	7.2	1265	4000	80	5000	12	4	1 / 10	07U402407XOHE
36	7.2	1265	6000	80	5000	12	4	20 / 20	07U602407XOHE ♦
58	11.5	1896	2700	128	5000	12	4	1 / 10	07U272411XOHE
58	11.5	1955	3000	128	5000	12	4	1 / 10	07U302411XOHE
58	11.5	1955	3500	128	5000	12	4	20 / 20	07U352411XOHE ♦
58	11.5	2020	4000	128	5000	12	4	1 / 10	07U402411XOHE
58	11.5	2020	6000	128	5000	12	4	20 / 20	07U602411XOHE ♦
72	14.4	2377	2700	160	5000	12	4	1 / 10	07U272414XOHE
72	14.4	2450	3000	160	5000	12	4	1 / 10	07U302414XOHE
72	14.4	2450	3500	160	5000	12	4	20 / 20	07U352414XOHE ♦
72	14.4	2530	4000	160	5000	12	4	1 / 10	07U402414XOHE
72	14.4	2530	6000	160	5000	12	4	20 / 20	07U602414XOHE ♦
108	21.6	3574	2700	240	5000	12	4	1 / 10	07U272421XOHE
108	21.6	3685	3000	240	5000	12	4	1 / 10	07U302421XOHE
108	21.6	3685	3500	240	5000	12	4	20 / 20	07U352421XOHE ♦
108	21.6	3800	4000	240	5000	12	4	1 / 10	07U402421XOHE
108	21.6	3800	6000	240	5000	12	4	20 / 20	07U602421XOHE ♦

♦ Only available with MOQ (20 Reels of 5mt); contact sales department for more information.

DURASTRIP

DURASTRIP PRO EVO IP20

The PRO EVO line is characterized by the narrow pitch of the LEDs even on the smaller power 5W/m: a quality product with 140lm/W efficiency.

Excellent colour rendering, Ra92, and a choice of 4 different wattages, from 5W per metre to 24W per metre.

It can be used in any project and provides excellent energy savings in residential or commercial contexts.

FEATURES

White shades: 3000K and 4000K available, other colour temperatures on request and with MOQ.

INSTALLATION

Complete with 3M double-sided tape to attach to the surface and jumpers to be screwed to the surface.

When using double-sided tape degrease the application surface adequately.

USAGE INFORMATION

Dimmable 0-100% Flicker Free

DALI - DMX - 1-10

Analogue and digital domotic control systems

Push Dali with ZKCDAFF controllers


CASAMBI compatible

PACKAGING

Packaged in 5 meters reels.

CONNECTIONS

To connect in series or parallel, see diagram in Info Tech pages.

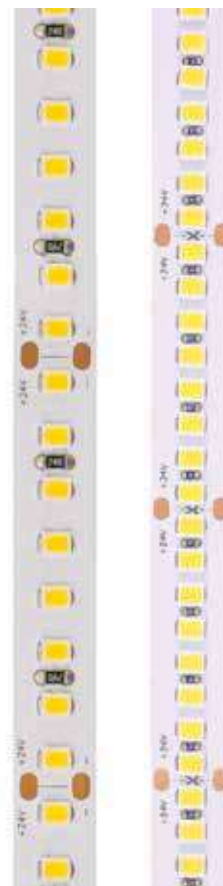

CUSTOM PRODUCTIONS

See details at the beginning of Linear Systems

Cutting DuraStrip to size*:

Fixed cost of piece work


* Respect the cutting pitch. Supplied with 15 cm cable.




VA01

LED SPACING AND PITCH CUT

8 LED (5W / 10W / 15W)

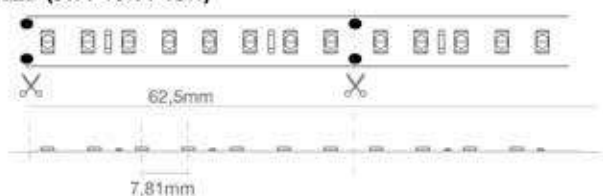


8 LED (21,6W)

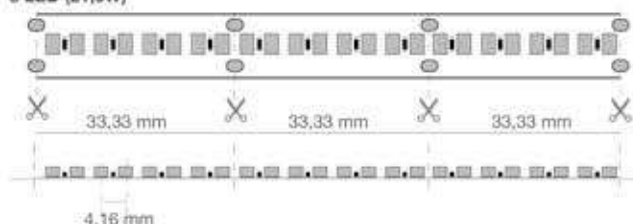

DURASTRIP

DURASTRIP PRO EVO IP20



W	W/m	lm/m	K	LED/m	L	L1	H		ART.
25	5	630	2700	128	5000	10	1	1 / 10	07U272405INPE
25	5	680	3000	128	5000	10	1	1 / 20	07U302405INPE
25	5	680	3500	128	5000	10	1	20 / 20	07U352405INPE ♦
25	5	700	4000	128	5000	10	1	1 / 20	07U402405INPE
25	5	700	6000	128	5000	10	1	20 / 20	07U602405INPE ♦
50	10	1260	2700	128	5000	10	1	1 / 10	07U272410INPE
50	10	1360	3000	128	5000	10	1	1 / 20	07U302410INPE
50	10	1360	3500	128	5000	10	1	20 / 20	07U352410INPE ♦
50	10	1400	4000	128	5000	10	1	1 / 20	07U402410INPE
50	10	1400	6000	128	5000	10	1	20 / 20	07U602410INPE ♦
75	15	1890	2700	128	5000	10	1	1 / 10	07U272415INPE
75	15	2035	3000	128	5000	10	1	1 / 20	07U302415INPE
75	15	2035	3500	128	5000	10	1	20 / 20	07U352415INPE ♦
75	15	2100	4000	128	5000	10	1	1 / 20	07U402415INPE
75	15	2100	6000	128	5000	10	1	20 / 20	07U602415INPE ♦
120	24	3025	2700	240	5000	10	1	1 / 10	07U272424INPE
120	24	3260	3000	240	5000	10	1	1 / 20	07U302424INPE
120	24	3260	3500	240	5000	10	1	20 / 20	07U352424INPE ♦
120	24	3360	4000	240	5000	10	1	1 / 20	07U402424INPE
120	24	3360	6000	240	5000	10	1	20 / 20	07U602424INPE ♦

♦ Only available with MOQ (20 Reels of 5mt); contact sales department for more information.

DURASTRIP

DURASTRIP PRO EVO IP68

The PRO EVO line is characterized by the narrow pitch of the LEDs even on the smaller power 5W/m: a quality product with 140lm/W efficiency.

Excellent colour rendering, Ra92, and a choice of 4 different wattages, from 5W per metre to 22W per metre.

It can be used in any project and provides excellent energy savings in residential or commercial contexts.

FEATURES

White shades: 3000K and 4000K available, other colour temperatures on request and with MOQ.

INSTALLATION

Complete with 3M double-sided tape to attach to the surface and jumpers to be screwed to the surface.

When using double-sided tape degrease the application surface adequately.

USAGE INFORMATION

Dimmable 0-100% Flicker Free

DALI - DMX - 1-10

Analogue and digital domotic control systems

Push Dali with ZKCDAFF controllers


CASAMBI compatible

PACKAGING

Packaged in 5 meters reels.

CONNECTIONS

To connect in series or parallel, see diagram in Info Tech pages.

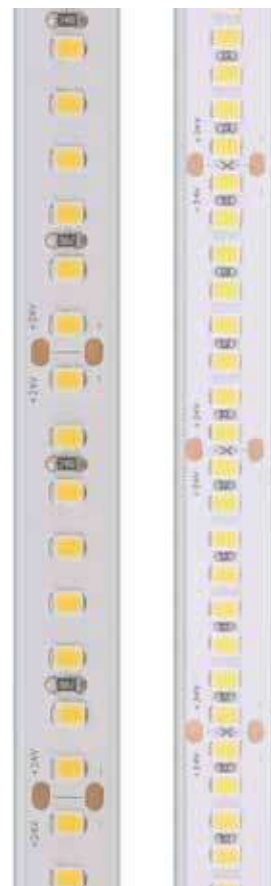

CUSTOM PRODUCTIONS

See details at the beginning of Linear Systems

Cutting DuraStrip to size*:

Fixed cost of piece work


* Respect the cutting pitch. Supplied with 15 cm cable.




VA01

LED SPACING AND PITCH CUT

8 LED (5W / 10W / 15W)

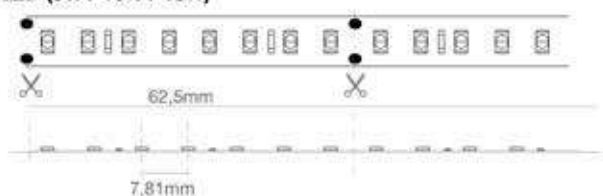


8 LED (21,6W)

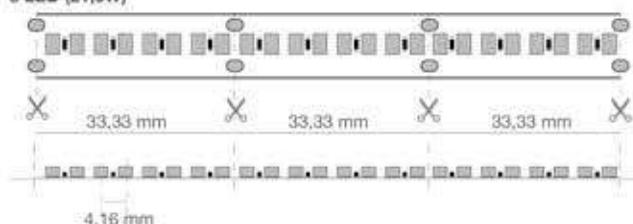

DURASTRIP

DURASTRIP PRO EVO IP68



W	W/m	lm/m	K	LED/m	L	L1	H		ART.
25	5	600	2700	128	5000	12	4	1 / 10	07U272405XOPE
25	5	645	3000	128	5000	12	4	1 / 10	07U302405XOPE
25	5	645	3500	128	5000	12	4	20 / 20	07U352405XOPE ♦
25	5	665	4000	128	5000	12	4	1 / 10	07U402405XOPE
25	5	665	6000	128	5000	12	4	20 / 20	07U602405XOPE ♦
50	10	1195	2700	128	5000	12	4	1 / 10	07U272410XOPE
50	10	1290	3000	128	5000	12	4	1 / 10	07U302410XOPE
50	10	1290	3500	128	5000	12	4	20 / 20	07U352410XOPE ♦
50	10	1330	4000	128	5000	12	4	1 / 10	07U402410XOPE
50	10	1330	6000	128	5000	12	4	20 / 20	07U602410XOPE ♦
75	15	1795	2700	128	5000	12	4	1 / 10	07U272415XOPE
75	15	1935	3000	128	5000	12	4	1 / 10	07U302415XOPE
75	15	1935	3500	128	5000	12	4	20 / 20	07U352415XOPE ♦
75	15	1995	4000	128	5000	12	4	1 / 10	07U402415XOPE
75	15	1995	6000	128	5000	12	4	20 / 20	07U602415XOPE ♦
110	22	2635	2700	240	5000	12	4	1 / 10	07U272422XOPE
110	22	2835	3000	240	5000	12	4	1 / 10	07U302422XOPE
110	22	2835	3500	240	5000	12	4	20 / 20	07U352422XOPE ♦
110	22	2925	4000	240	5000	12	4	1 / 10	07U402422XOPE
110	22	2925	6000	240	5000	12	4	20 / 20	07U602422XOPE ♦

♦ Only available with MOQ (20 Reels of 5mt); contact sales department for more information.

DURASTRIP

DURASTRIP TRIPLES

TRIPLES are strips that are closest to LED plates with the added advantage of flexibility, they are easy to cut in the field at intervals of 5 cm and easy to install.

With a width of 25 mm and careful positioning of the LED sources they ensure a broad luminous surface and considerable power output: 5000 lumen per metre for warm light.

TRIPLES are installed in profiles with wide diffusion for example in suspension profiles.

INSTALLATION

Complete with 3M double-sided tape to attach to the surface. When using double-sided tape degrease the application surface adequately.

Always use with aluminium profiles for heat dissipation.

USAGE INFORMATION

Dimmable 0-100% Flicker Free

DALI - DMX - 1-10

Analogue and digital domotic control systems

Push Dali with ZKCDRAFF controllers

CASAMBI compatible

PACKAGING

Packaged in 5 meters reels.

LED

LED 2835SMD

480 LED/m

Ra>90

Lifetime: >50,000h

Warranty: 5 years

COLOUR OF THE LIGHT

Choice of white colour temperatures.

BINNING

ANSI/SDCM: 2 step.

CONNECTIONS

IP20: terminals with free wires.

Strips can be cut to size by following the cutting indications printed on the strips.



CUSTOM PRODUCTIONS

See details at the beginning of Linear Systems

Cutting DuraStrip to size*:


Fixed cost of piece work

* Respect the cutting pitch. Supplied with 15 cm cable.



VA01


LED SPACING AND PITCH CUT

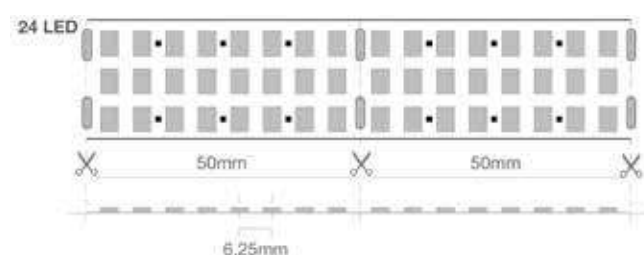

DURASTRIP

DURASTRIP TRIPLES

PRO	24 Vdc	Ra >90		50000 h L70B20	IP20	-25°C +35°C	Risk Group 0				
------------	--------	--------	---	-------------------	------	----------------	-----------------	---	---	---	---

W	W/m	lm/m	K	LED/ m	L	L1	H		ART.
210	42	5060	3000	480	5000	25	1.7	20 / 20	07U302442INTR ♦
210	42	5205	4000	480	5000	25	1.7	20 / 20	07U402442INTR ♦

♦ Only available with MOQ (20 Reels of 5mt): contact sales department for more information.

DURASTRIP

DURASTRIP EXTRA NARROW IP20

The EXTRA NARROW series is a concentrate of quality materials that is shared with other DURASTRIP: high quality choices to ensure a professional level performance, excellent heat dissipation and long duration, Ra >90.

EXTRA NARROW is the range with the smallest substrate in the entire collection.

Just 5 mm or 6 mm wide, it solves all needs not only connected to confined spaces but above all, for characteristic lighting design.

The type of LED source used and the short LED's center to center distance eliminate the dot effect also in profiles with lenses that are very close to the base.

INSTALLATION

Complete with 3M double-sided tape to attach to the surface. When using double-sided tape degrease the application surface adequately.

USAGE INFORMATION

Dimmable 0-100% Flicker Free

DALI - DMX - 1-10

Analogue and digital domotic control systems

Push Dali with ZKCDAFF controllers

CASAMBI compatible

PACKAGING

Packaged in 5 meters reels.

LED

LED 2216

180 LED/m - 300 LED/m

Ra>90

Lifetime: >50,000h

Warranty: 5 years

COLOUR OF THE LIGHT

Choice of white colour temperatures.

BINNING


ANSI/SDCM: 2 step.

CONNECTIONS

Terminals with free wires.

Maximum connection length 5 m. Max 4A.

For longer connections, connect in series or parallel, see diagram. Strips can be cut to size by following the cutting indications printed on the strips.

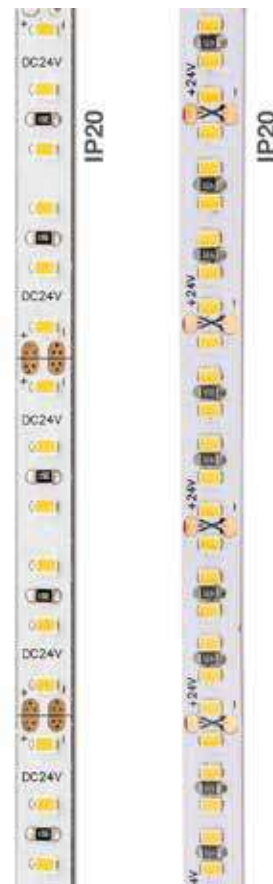

CUSTOM PRODUCTIONS

See details at the beginning of Linear Systems

Cutting DuraStrip to size*:



Fixed cost of piece work

* Respect the cutting pitch. Supplied with 15 cm cable.



VA01


LED SPACING AND PITCH CUT

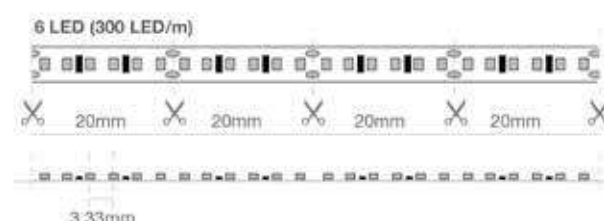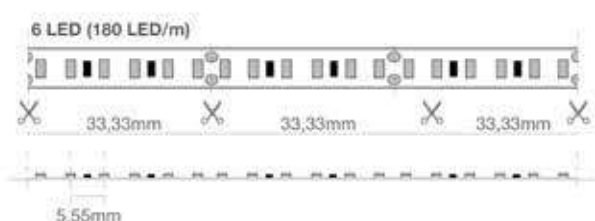

DURASTRIP

DURASTRIP EXTRA NARROW IP20



W/m	lm/m	K	LED/m	L	L1	H		ART.
7.2	515	2200	180	5000	5	1	20 / 20	07U222407INEN ♦
7.2	560	2700	180	5000	5	1	20 / 20	07U272407INEN ♦
7.2	590	3000	180	5000	5	1	1 / 20	07U302407INEN
7.2	590	3500	180	5000	5	1	20 / 20	07U352407INEN ♦
7.2	610	4000	180	5000	5	1	1 / 20	07U402407INEN
7.2	680	6000	180	5000	5	1	20 / 20	07U602407INEN ♦
11	720	2200	300	5000	6	1	20 / 20	07U222411INUEN ♦
11	720	2700	300	5000	6	1	1 / 20	07U272411INUEN
11	760	3000	300	5000	6	1	1 / 20	07U302411INUEN
11	760	3500	300	5000	6	1	20 / 20	07U352411INUEN ♦
11	800	4000	300	5000	6	1	1 / 20	07U402411INUEN
11	800	6000	300	5000	6	1	20 / 20	07U602411INUEN ♦

♦ Only available with MOQ (20 Reels of 5mt): contact sales department for more information.

DURASTRIP

DURASTRIP EXTRA NARROW IP65

The EXTRA NARROW series is a concentrate of quality materials that is shared with other DURASTRIP: high quality choices to ensure a professional level performance, excellent heat dissipation and long duration, Ra >90.

EXTRA NARROW is the range with the smallest substrate in the entire collection.

Just 5 mm or 6 mm wide, it solves all needs not only connected to confined spaces but above all, for characteristic lighting design.

The type of LED source used and the short LED's center to center distance eliminate the dot effect also in profiles with lenses that are very close to the base.

INSTALLATION

Complete with 3M double-sided tape to attach to the surface. When using double-sided tape degrease the application surface adequately.

USAGE INFORMATION

Dimmable 0-100% Flicker Free

DALI - DMX - 1-10

Analogue and digital domotic control systems

Push Dali with ZKCDA controllers

CASAMBI compatible

PACKAGING

Packaged in 5 meters reels.

LED

LED 2216

180 LED/m

300 LED/m

Ra>90

Lifetime: >50,000h

Warranty: 5 years

COLOUR OF THE LIGHT

Choice of white colour temperatures.

BINNING

ANSI/SDCM: 2 step.

CONNECTIONS

Maximum connection length 5 m. Max 4A.

For longer connections, connect in series or parallel, see diagram.

Strips can be cut to size by following the cutting indications printed on the strips.



CUSTOM PRODUCTIONS

See details at the beginning of Linear Systems

Cutting DuraStrip to size*:



Fixed cost of piece work

* Respect the cutting pitch. Supplied with 15 cm cable.



VA01


LED SPACING AND PITCH CUT

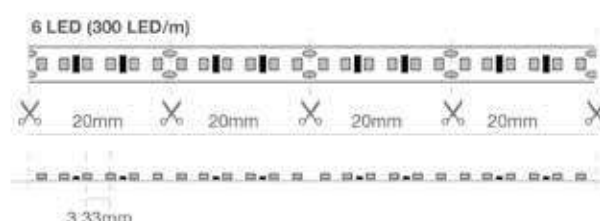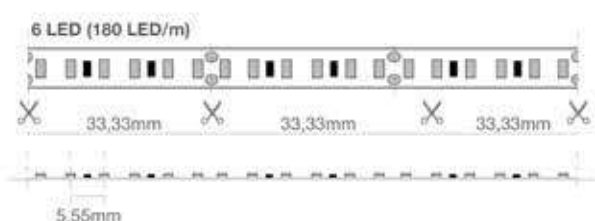

DURASTRIP

DURASTRIP EXTRA NARROW IP65



W/m	lm/m	K	LED/m	L	L1	H		ART.
11	720	2200	300	5000	8	4	20 / 20	07U222411EXUEN ♦
11	720	2700	300	5000	8	4	1 / 10	07U272411EXUEN
11	760	3000	300	5000	8	4	1 / 10	07U302411EXUEN
11	760	3500	300	5000	8	4	20 / 20	07U352411EXUEN ♦
11	800	4000	300	5000	8	4	1 / 10	07U402411EXUEN
11	800	6000	300	5000	8	4	20 / 20	07U602411EXUEN ♦

♦ Only available with MOQ (20 Reels of 5mt): contact sales department for more information.

DURASTRIP

DURASTRIP BIDIRECTIONAL

Two-way DURASTRIP are made by mounting the LED sources on the substrate in two orthogonal lines: this creates an asymmetric emission of around 220°.

The previous final result could only be obtained by using two strips and a particular arrangement.

Two-way DURASTRIP are a functional optimization and therefore perfect for projects that focus on using decorative profiles or where a wall washer effect is required.

INSTALLATION

Complete with 3M double-sided tape to attach to the surface.
When using double-sided tape degrease the application surface adequately.

USAGE INFORMATION

Dimmable 0-100% Flicker Free

DALI - DMX - 1-10

Analogue and digital domotic control systems

Push Dali with ZKCDIFF controllers

CASAMBI compatible

PACKAGING

Packaged in 5 meters reels.

LED

LED 3014SMD

240 LED/m

Ra>90

2200K: Ra>80

Lifetime: >50,000h

Warranty: 5 years

COLOUR OF THE LIGHT

Choice of white colour temperatures.

BINNING

ANSI/SDCM: 2 step.


CONNECTIONS

IP20: terminals with free wires.

Maximum connection length 5 m. Max 4A.

For longer connections, connect in series or parallel, see diagram.

Strips can be cut to size by following the cutting indications printed on the strips.

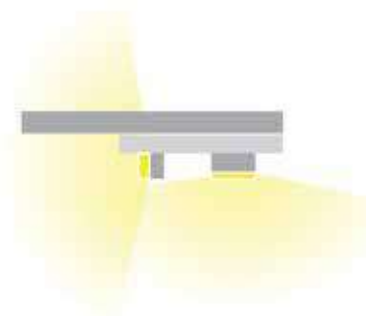

CUSTOM PRODUCTIONS

See details at the beginning of Linear Systems

Cutting DuraStrip to size*:


Fixed cost of piece work

* Respect the cutting pitch. Supplied with 15 cm cable.




VA01


LED SPACING AND PITCH CUT

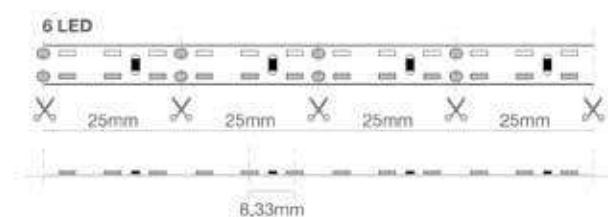

DURASTRIP

DURASTRIP BIDIRECTIONAL



W	W/m	lm/m	K	Ra	LED/m	L	L1	H		ART.
72	14.4	1100	2200	>80	240	5000	8	1.5	20 / 20	07U222414INBD ♦
72	14.4	1200	2700	>90	240	5000	8	1.5	20 / 20	07U272414INBD ♦
72	14.4	1260	3000	>90	240	5000	8	1.5	20 / 20	07U302414INBD ♦
72	14.4	1260	3500	>90	240	5000	8	1.5	20 / 20	07U352414INBD ♦
72	14.4	1300	4000	>90	240	5000	8	1.5	20 / 20	07U402414INBD ♦
72	14.4	1320	6000	>90	240	5000	8	1.5	20 / 20	07U602414INBD ♦

♦ Only available with MOQ (20 Reels of 5mt): contact sales department for more information.

DURASTRIP

DURASTRIP S BEND

Owing to the particular qualities of the substrate, DURASTRIP S BEND allows tight corners to be created while maintaining the uniformity of light.

It is Ideal for following and emphasising the most imaginative forms of modern architecture along with providing creative lighting solutions for many other applications where a minimal installation radius is desired.

INSTALLATION

Complete with 3M double-sided tape to attach to the surface.
When using double-sided tape degrease the application surface adequately.

USAGE INFORMATION

Dimmable 0-100% Flicker Free
DALI - DMX - 1-10
Analogue and digital domotic control systems
Push Dali with ZKCDAFF controllers
CASAMBI compatible

PACKAGING

Packaged in 5 meters reels.

LED

LED 2835
60 LED/m
Ra>80
Lifetime: >50,000h
Warranty: 5 years

COLOUR OF THE LIGHT

Choice of white colour temperatures.

BINNING

ANSI/SDCM: 3 step.

CONNECTIONS

IP20: terminals with free wires.
Maximum connection length 5 m. Max 4A.
Strips can be cut to size by following the cutting indications printed on the strips.



CUSTOM PRODUCTIONS

See details at the beginning of Linear Systems

Cutting DuraStrip to size*:


Fixed cost of piece work

* Respect the cutting pitch. Supplied with 15 cm cable.



VA01


LED SPACING AND PITCH CUT

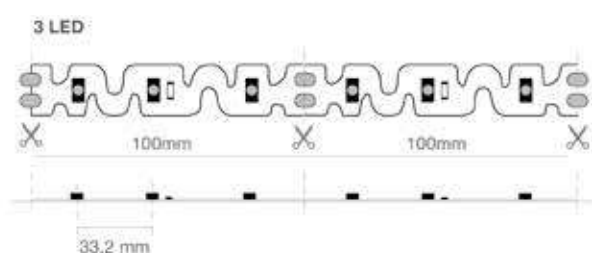

DURASTRIP

DURASTRIP S BEND

PRO	24 Vdc	Ra >90		50000 h L70B20	IP20	-25°C +35°C	Risk Group 0		 120°		
------------	--------	--------	---	-------------------	------	----------------	-----------------	---	---	---	---

W	W/m	lm/m	K	LED/ m	L	L1	H		ART.
36	7.2	520	2700	60	5000	6	1	20 / 20	07U272407INEB ♦
36	7.2	550	3000	60	5000	6	1	20 / 20	07U302407INEB ♦
36	7.2	550	3500	60	5000	6	1	20 / 20	07U352407INEB ♦
36	7.2	580	4000	60	5000	6	1	20 / 20	07U402407INEB ♦
36	7.2	580	6000	60	5000	6	1	20 / 20	07U602407INEB ♦

♦ Only available with MOQ (20 Reels of 5mt): contact sales department for more information.

DURASTRIP

DURASTRIP EXTRALONG 24V IP20

EXTRALONG 24V produced in 20 metre reels allow for installations of great lengths, up to a max of 20m also with chain segments connection, without extra power supplies.

With two strips (not connected) and two drivers at opposite ends, light lines of up to 40 metres can be achieved!

EXTRALONG 24V solve problems in situations that require indirect lighting (cove lighting) or outdoors where numerous power supplies cannot be stored or where there are limitations for cables to pass. EXTRALONG 24V have all the same quality components and construction method as all other strips in the range to obtain real lighting uniformity over the entire length of the strips.

INSTALLATION

Complete with 3M double-sided tape to attach to the surface. When using double-sided tape degrease the application surface adequately.

USAGE INFORMATION

Dimmable 0-100% Flicker Free

DALI - DMX - 1-10

Analogue and digital domotic control systems

Push Dali with ZKCDAFF controllers

CASAMBI compatible

PACKAGING

Packaged in 20 meters reels.

LED

LED 2835SMD

120 LED/m

Ra>90

Lifetime: >50,000h

Warranty: 5 years

COLOUR OF THE LIGHT

Choice of white colour temperatures.

BINNING

ANSI/SDCM: 2 step.

CONNECTIONS

Terminals with free wires.

Maximum connection length 20 m.

Strips can be cut to size by following the cutting indications printed on the strips.



CUSTOM PRODUCTIONS

See details at the beginning of Linear Systems

Cutting DuraStrip to size*:


Fixed cost of piece work

* Respect the cutting pitch. Supplied with 15 cm cable.



VA01


LED SPACING AND PITCH CUT

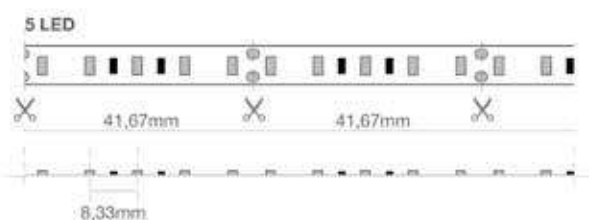

DURASTRIP

DURASTRIP EXTRALONG 24V IP20

PRO	24 Vdc	Ra >90		50000 h L70B20	IP20	-25°C +35°C	Risk Group 0		 120°		
------------	--------	--------	---	-------------------	------	----------------	-----------------	---	--	---	---

W	W/m	lm/m	K	LED/ m	L	L1	H		ART.
220	11	695	3000	120	20000	10	1.7	1 / 1	07U302411INL2000
220	11	715	4000	120	20000	10	1.7	1 / 1	07U402411INL2000

DURASTRIP

DURASTRIP EXTRALONG 24V IP65

EXTRALONG 24V produced in 20 metre reels allow for installations of great lengths, up to a max of 20m also with chain segments connection, without extra power supplies.

With two strips (not connected) and two drivers at opposite ends, light lines of up to 40 metres can be achieved!

EXTRALONG 24V solve problems in situations that require indirect lighting (cove lighting) or outdoors where numerous power supplies cannot be stored or where there are limitations for cables to pass. EXTRALONG 24V have all the same quality components and construction method as all other strips in the range to obtain real lighting uniformity over the entire length of the strips.

INSTALLATION

Complete with 3M double-sided tape to attach to the surface. When using double-sided tape degrease the application surface adequately.

USAGE INFORMATION

Dimmable 0-100% Flicker Free

DALI - DMX - 1-10

Analogue and digital domotic control systems

Push Dali with ZKCDAFF controllers

CASAMBI compatible

PACKAGING

Packaged in 20 meters reels.

LED

LED 2835SMD

120 LED/m

Ra>90

Lifetime: >50,000h

Warranty: 5 years

COLOUR OF THE LIGHT

Choice of white colour temperatures.

BINNING

ANSI/SDCM: 2 step.

CONNECTIONS

Complete with IP68 / 68 Male/Female wire on 2 sides, length 15 cm.

Maximum connection length 20 m.

Strips can be cut to size by following the cutting indications printed on the strips.



CUSTOM PRODUCTIONS

See details at the beginning of Linear Systems

Cutting DuraStrip to size*:


Fixed cost of piece work

* Respect the cutting pitch. Supplied with 15 cm cable.





VA01

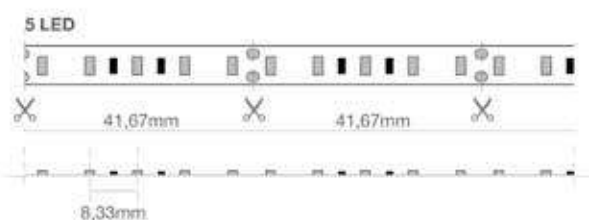
LED SPACING AND PITCH CUT



DURASTRIP

DURASTRIP EXTRALONG 24V IP65

PRO	24 Vdc	Ra >90		50000 h L70B20	IP68	-25°C +35°C	Risk Group 0		 120°		
------------	--------	--------	---	-------------------	------	----------------	-----------------	---	--	---	---

W	W/m	lm/m	K	LED/ m	L	L1	H		ART.
220	11	695	3000	120	20000	12	5	1 / 1	07U302411XOL2000
220	11	715	4000	120	20000	12	5	1 / 1	07U402411XOL2000

DURASTRIP

DURASTRIP EXTRALONG 48V IP20

EXTRALONG 48V produced in 50 metre reels allow for installations of great lengths, up to a max of 50m also with chain segments connection, without extra power supplies.

With two strips (not connected) and two drivers at opposite ends, light lines of up to 100 metres can be achieved!

EXTRALONG 48V have all the same quality components and construction method as all other strips in the range to obtain real lighting uniformity over the entire length of the strips.

INSTALLATION

Complete with 3M double-sided tape to attach to the surface. When using double-sided tape degrease the application surface adequately.

PACKAGING

Packaged in 50 meters reels.

LED

LED 2835SMD

84 LED/m

Ra>90

Lifetime: >50,000h

Warranty: 5 years

COLOUR OF THE LIGHT

Choice of white colour temperatures.

BINNING

ANSI/SDCM: 2 step.

CONNECTIONS

Terminals with free wires.

Maximum connection length 50 m.

Strips can be cut to size by following the cutting indications printed on the strips.



CUSTOM PRODUCTIONS

See details at the beginning of Linear Systems

Cutting DuraStrip to size*:

Fixed cost of piece work

* Respect the cutting pitch. Supplied with 15 cm cable.



VA01


LED SPACING AND PITCH CUT



DURASTRIP

DURASTRIP EXTRALONG 48V IP20

PRO	48 Vdc	Ra >90		50000 h L70B20	IP20	-25°C +35°C	Risk Group 0		 120°		
------------	--------	--------	---	-------------------	------	----------------	-----------------	---	--	---	---

W	W/m	lm/m	K	LED/ m	L	L1	H		ART.
225	5.6	520	3000	84	50000	12	1.7	1 / 1	07U304806INL5000
225	5.6	535	4000	84	50000	12	1.7	1 / 1	07U404806INL5000

DURASTRIP

DURASTRIP EXTRALONG 48V IP65

EXTRALONG 48V produced in 50 metre reels allow for installations of great lengths, up to a max of 50m also with chain segments connection, without extra power supplies.

With two strips (not connected) and two drivers at opposite ends, light lines of up to 100 metres can be achieved!

EXTRALONG 48V have all the same quality components and construction method as all other strips in the range to obtain real lighting uniformity over the entire length of the strips.

INSTALLATION

Complete with 3M double-sided tape to attach to the surface. When using double-sided tape degrease the application surface adequately.

PACKAGING

Packaged in 50 meters reels.

LED

LED 2835SMD

84 LED/m

Ra>90

Lifetime: >50,000h

Warranty: 5 years

COLOUR OF THE LIGHT

Choice of white colour temperatures.

BINNING

ANSI/SDCM: 2 step.

CONNECTIONS

Complete with IP68 / 68 Male/Female wire on 2 sides, length 15 cm.

Maximum connection length 50 m.

Strips can be cut to size by following the cutting indications printed on the strips.



CUSTOM PRODUCTIONS

See details at the beginning of Linear Systems

Cutting DuraStrip to size*:


Fixed cost of piece work

* Respect the cutting pitch. Supplied with 15 cm cable.





VA01

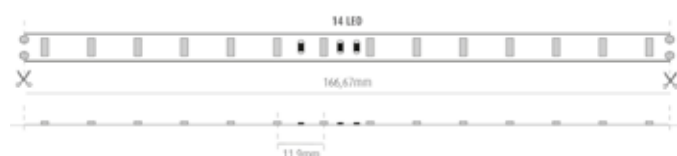
LED SPACING AND PITCH CUT



DURASTRIP

DURASTRIP EXTRALONG 48V IP65

PRO	48 Vdc	Ra >90		50000 h L70B20	IP65	-25°C +35°C	Risk Group 0		 120°		
------------	--------	--------	---	-------------------	------	----------------	-----------------	---	--	---	---

W	W/m	lm/m	K	LED/ m	L	L1	H		ART.
225	5.6	520	3000	84	50000	14	5	1 / 1	07U304806XOL5000
225	5.6	535	4000	84	50000	14	5	1 / 1	07U404806XOL5000



DURASTRIP

DURASTRIP WALL WASHER

A minimal and unobtrusive light element providing a wall wash effect.

By utilising an asymmetric reflector, the light is directed across the vertical surface, the efficiency of the LED's power is maximised to provide a uniform wash effect of light.

The product is sealed to guarantee a high degree of Ingress Protection (IP67).

INSTALLATION

Installation requires metal clips, see separate accessories code.

USAGE INFORMATION

Dimmable 0-100%

DALI - DMX

Analogue and digital domotic control systems

Push Dali with ZKCDAFF controllers

CASAMBI compatible

PACKAGING

Packaged in 5 meters reels.

LED

LED 3030

30 LED/m

Ra>90

Lifetime: >30,000h

Warranty: 3 years

COLOUR OF THE LIGHT

Choice of white colour temperatures.

BINNING

ANSI/SDCM: 3 step.

CONNECTIONS

IP67: complete with a 15 cm long M/F cable on 2 sides.

Maximum connection length 5 m. Max 4A.

Strips can be cut to size by following the cutting indications printed on the strips.

2 PIN connectors included in kit code KT07UXOL allow strips to be linked up to a maximum run of 5 meters.



CUSTOM PRODUCTIONS

See details at the beginning of Linear Systems

Cutting DuraStrip to size*:


Fixed cost of piece work

* Respect the cutting pitch. Supplied with 15 cm cable.





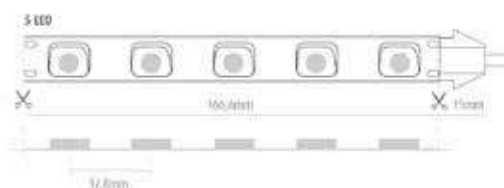

VA01


LED SPACING AND PITCH CUT



DURASTRIP

DURASTRIP WALL WASHER


PRO	24 Vdc	Ra >90		30000 h L70B20	IP67	-25°C +35°C	Risk Group 0		 100°x70° (40°+30°)		
------------	--------	--------	---	-------------------	------	----------------	-----------------	---	--	---	---

W	W/m	lm/m	K	LED/ m	L	L1	H		ART.
96	19.2	1400	2700	30	5000	23	10.5	20 / 20	07U272419XWA ♦
96	19.2	1450	3000	30	5000	23	10.5	20 / 20	07U302419XWA ♦
96	19.2	1450	3500	30	5000	23	10.5	20 / 20	07U352419XWA ♦
96	19.2	1500	4000	30	5000	23	10.5	20 / 20	07U402419XWA ♦
96	19.2	1500	6000	30	5000	23	10.5	20 / 20	07U602419XWA ♦

♦ Only available with MOQ (20 Reels of 5mt): contact sales department for more information.


CONNECTORS KIT



		ART.
Cut and mount kit for Strip IP67	1 / 1	KT07UXWL
Includes 2 2 PIN connectors, 2 2 PIN male connector cables, 2 2 PIN female connector cables..		

UV LIGHT



		ART.
UV light	1 / 1	KT07UXWL-UV
UV light for fast glue fixing.		

CLIPS KIT



		ART.
Metal clips	1 / 1	KT07UXWL-CL
Metal clips kit - 10 pieces.		

DURASTRIP

DURASTRIP GRAZER

As a result of each individual LED being fitted with a 30° aperture, DURASTRIP GRAZER will create a distinguished radiance effect. The grazing properties will highlight a relief on a building's facade, the material essence of modern wallpaper or the refined imperfections of an architectural wall.

The narrow angle of GRAZER requires the installation to be positioned slightly offset from the wall enhancing the three-dimensional aspect of the illuminated vertical surface.

INSTALLATION

Installation requires metal clips, see separate accessories code.

USAGE INFORMATION

Dimmable 0-100%

DALI - DMX

Analogue and digital domotic control systems

Push Dali with ZKCDAFF controllers

CASAMBI compatible

PACKAGING

Packaged in 5 meters reels.

LED

LED 3030

42 LED/m

Ra>90

Lifetime: >30,000h

Warranty: 3 years

COLOUR OF THE LIGHT

Choice of white colour temperatures.

BINNING

ANSI/SDCM: 3 step.

CONNECTIONS

IP67: complete with a 15 cm long M/F cable on 2 sides.

Maximum connection length 5 m. Max 4A.

Strips can be cut to size by following the cutting indications printed on the strips.

2 PIN connectors included in kit code KT07UXOL allow strips to be linked up to a maximum run of 5 meters.



CUSTOM PRODUCTIONS

See details at the beginning of Linear Systems

Cutting DuraStrip to size*:


Fixed cost of piece work

* Respect the cutting pitch. Supplied with 15 cm cable.






VA01

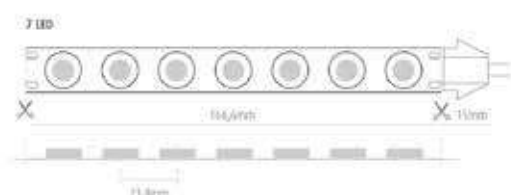
LED SPACING AND PITCH CUT



DURASTRIP

DURASTRIP GRAZER


PRO	24 Vdc	Ra >90		30000 h L70B20	IP67	-25°C +35°C	Risk Group 0				
------------	--------	--------	---	-------------------	------	----------------	-----------------	---	---	---	---

W	W/m	lm/m	K	LED/ m	L	L1	H		ART.
96	19.2	1750	2700	42	5000	23	11	20 / 20	07U272419XWG ♦
96	19.2	1800	3000	42	5000	23	11	20 / 20	07U302419XWG ♦
96	19.2	1800	3500	42	5000	23	11	20 / 20	07U352419XWG ♦
96	19.2	1850	4000	42	5000	23	11	20 / 20	07U402419XWG ♦
96	19.2	1850	6000	42	5000	23	11	20 / 20	07U602419XWG ♦

♦ Only available with MOQ (20 Reels of 5mt): contact sales department for more information.


CONNECTORS KIT



		ART.
Cut and mount kit for Strip IP67	1 / 1	KT07UXWL
Includes 2 2 PIN connectors, 2 2 PIN male connector cables, 2 2 PIN female connector cables..		


UV LIGHT



		ART.
UV light	1 / 1	KT07UXWL-UV
UV light for fast glue fixing.		

CLIPS KIT



		ART.
Metal clips	1 / 1	KT07UXWL-CL
Metal clips kit - 10 pieces.		

DURASTRIP

DURASTRIP FULL SPECTRUM IP20

DURASTRIP FULL SPECTRUM means that the white colour of this strip is created by a spectrum that includes all of the colours. Colour rendering is excellent, $Ra > 95$ but DURASTRIP FULL SPECTRUM goes far beyond this figure.

The FULL SPECTRUM is able to reproduce the colours in the environment, returning the vividness of the objects as if they are lit by the sun, in all colour temperatures.

To show more clearly and immediately the performance of these strips from the colour rendering point of view, we have provided the values indicated by the TM-30.

DURASTRIP FULL SPECTRUM is indispensable in environments where the point of colour is very important: art galleries, museums, fabric shops, etc.

INSTALLATION

Complete with 3M double-sided tape to attach to the surface. When using double-sided tape degrease the application surface adequately.

USAGE INFORMATION

Dimmable 0-100% Flicker Free

DALI - DMX - 1-10

Analogue and digital domotic control systems

Push Dali with ZKCDIFF controllers

CASAMBI compatible

PACKAGING

Packaged in 5 meters reels.

LED

LED 2835

240 LED/m

$Ra > 95$

Lifetime: $> 50,000h$

Warranty: 5 years

COLOUR OF THE LIGHT

Choice of white colour temperatures.

BINNING


ANSI/SDCM: 2 step.

CONNECTIONS

Terminals with free wires.

Maximum connection length 5 m. Max 4A.

Strips can be cut to size by following the cutting indications printed on the strips.

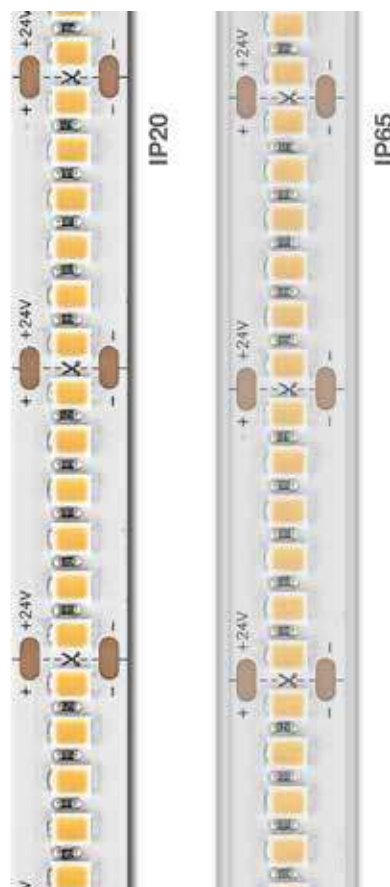

CUSTOM PRODUCTIONS

See details at the beginning of Linear Systems

Cutting DuraStrip to size*:


Fixed cost of piece work

* Respect the cutting pitch. Supplied with 15 cm cable.



VA01


LED SPACING AND PITCH CUT

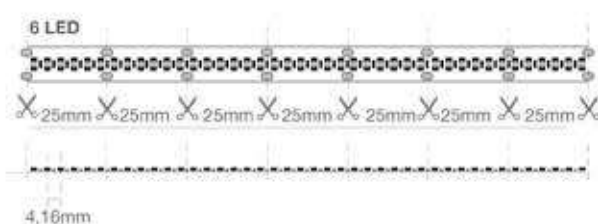

DURASTRIP

DURASTRIP FULL SPECTRUM IP20

PRO	24 Vdc	Ra >95		50000 h L70B20	IP20	-25°C +35°C	Risk Group 0		 120°		
------------	--------	--------	---	-------------------	------	----------------	-----------------	---	---	---	---

W	W/m	lm/m	K	LED/ m	L	L1	H		ART.
70	14	1170	2700	240	5000	10	1	20 / 20	07U272414INFS ♦
70	14	1235	3000	240	5000	10	1	20 / 20	07U302414INFS ♦
70	14	1235	3500	240	5000	10	1	20 / 20	07U352414INFS ♦
70	14	1300	4000	240	5000	10	1	20 / 20	07U402414INFS ♦
70	14	1300	6000	240	5000	10	1	20 / 20	07U602414INFS ♦

♦ Only available with MOQ (20 Reels of 5mt): contact sales department for more information.

DURASTRIP

DURASTRIP FULL SPECTRUM IP68

DURASTRIP FULL SPECTRUM means that the white colour of this strip is created by a spectrum that includes all of the colours. Colour rendering is excellent, Ra>95 but DURASTRIP FULL SPECTRUM goes far beyond this figure.

The FULL SPECTRUM is able to reproduce the colours in the environment, returning the vividness of the objects as if they are lit by the sun, in all colour temperatures.

To show more clearly and immediately the performance of these strips from the colour rendering point of view, we have provided the values indicated by the TM-30.

DURASTRIP FULL SPECTRUM is indispensable in environments where the point of colour is very important: art galleries, museums, fabric shops, etc.

INSTALLATION

Complete with 3M double-sided tape to attach to the surface. When using double-sided tape degrease the application surface adequately.

USAGE INFORMATION

Dimmable 0-100% Flicker Free

DALI - DMX - 1-10

Analogue and digital domotic control systems

Push Dali with ZKCDAFF controllers

CASAMBI compatible

PACKAGING

Packaged in 5 meters reels.

LED

LED 2835

240 LED/m

Ra>95

Lifetime: >50,000h

Warranty: 5 years

COLOUR OF THE LIGHT

Choice of white colour temperatures.

BINNING


ANSI/SDCM: 2 step.

CONNECTIONS

Complete with IP68 / 68 Male/Female wire on 2 sides, length 15 cm.

Maximum connection length 5 m. Max 4A.

Strips can be cut to size by following the cutting indications printed on the strips.

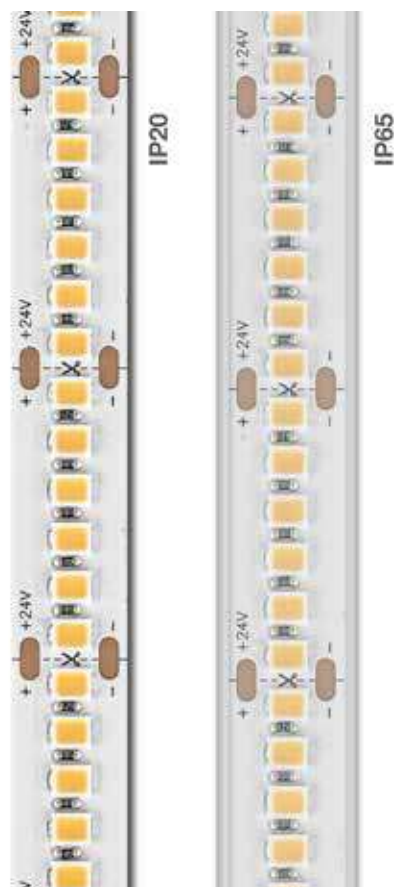

CUSTOM PRODUCTIONS

See details at the beginning of Linear Systems

Cutting DuraStrip to size*:


Fixed cost of piece work

* Respect the cutting pitch. Supplied with 15 cm cable.



VA01


LED SPACING AND PITCH CUT

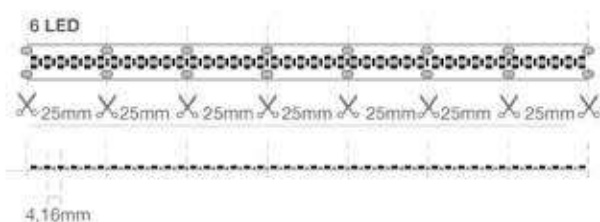

DURASTRIP

DURASTRIP FULL SPECTRUM IP68

PRO	24 Vdc	Ra >95		50000 h L70B20	IP68	-25°C +35°C	Risk Group 0				
------------	--------	--------	---	-------------------	------	----------------	-----------------	---	---	---	---

W	W/m	lm/m	K	LED/ m	L	L1	H		ART.
70	14	1170	2700	240	5000	12	5	20 / 20	07U272414XOFS ♦
70	14	1235	3000	240	5000	12	5	20 / 20	07U302414XOFS ♦
70	14	1235	3500	240	5000	12	5	20 / 20	07U352414XOFS ♦
70	14	1300	4000	240	5000	12	5	20 / 20	07U402414XOFS ♦
70	14	1300	6000	240	5000	12	5	20 / 20	07U602414XOFS ♦

♦ Only available with MOQ (20 Reels of 5mt): contact sales department for more information.

ADDITIONAL CUT AND MOUNT KIT FOR STRIP IP68



	ART.
Additional cut and mount kit for Strip IP68	KT68PA






Additional cut and mount kit for Strip IP68 and IP65.
This kit includes 4 terminal blocks with 15 cm wire, 10 silicone fixing bridges with screws.

DURASTRIP FULL SPECTRUM

It is immediately evident from the chromatic diagram that the overlapping of the reference source circle with the one created by the analysis values of the FULL SPECTRUM strip is practically perfect. For a more in-depth explanation of the TM-30, see the introduction pages.






2700K

Ra	98
R9	97
Rf	93,3
Rg	99,4

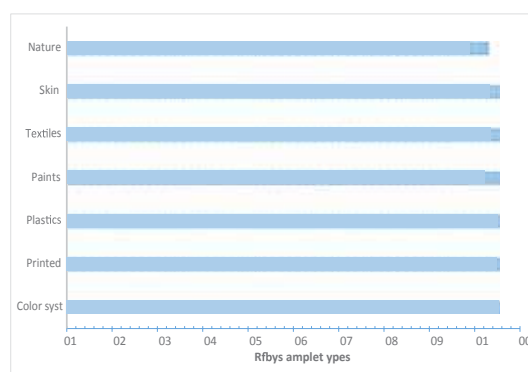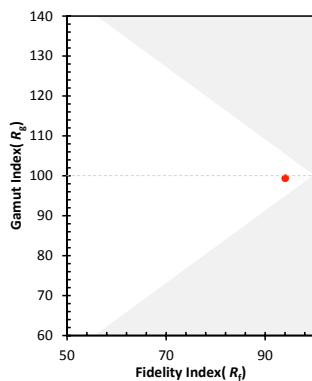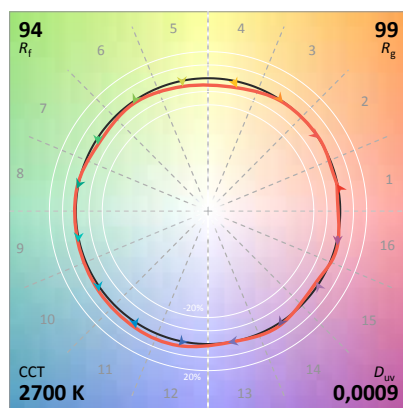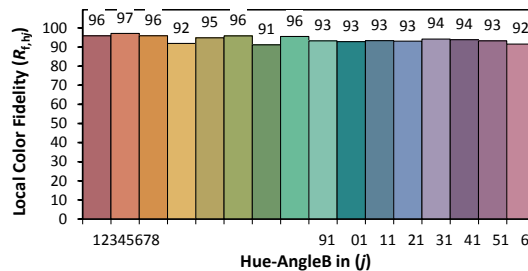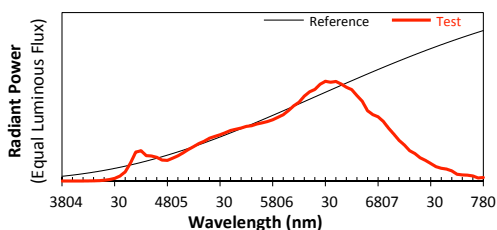






3000K

Ra	99
R9	97
Rf	93,5
Rg	100,0

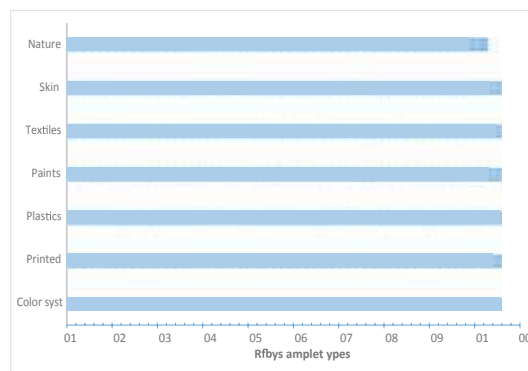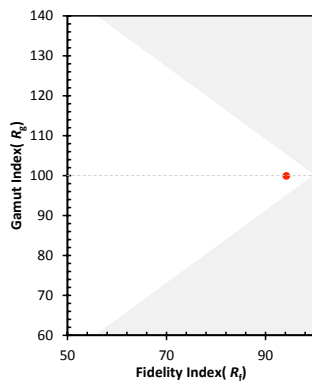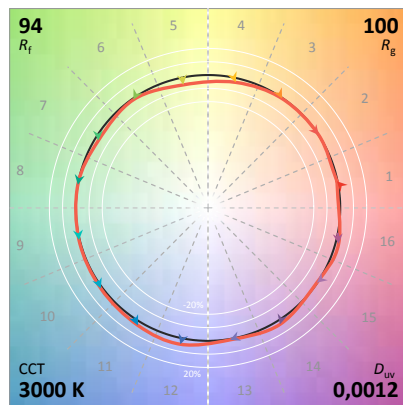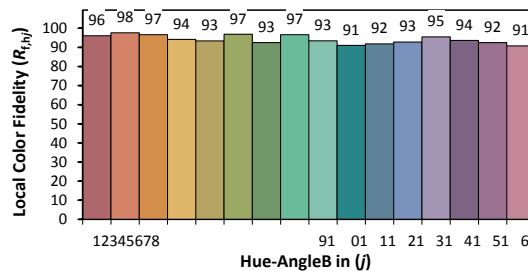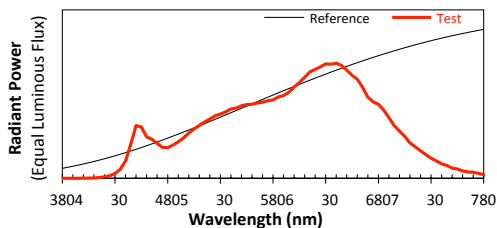






4000K

Ra	96
R9	98
Rf	89,9
Rg	97,6

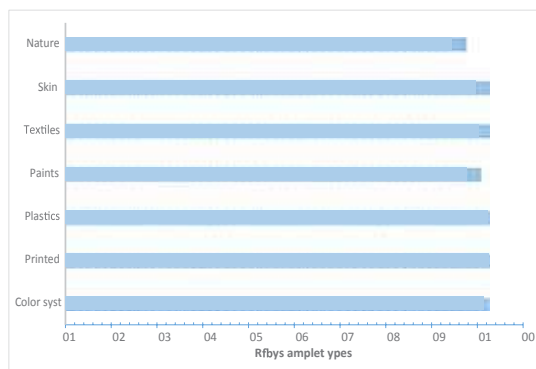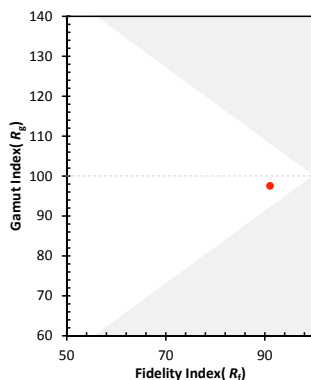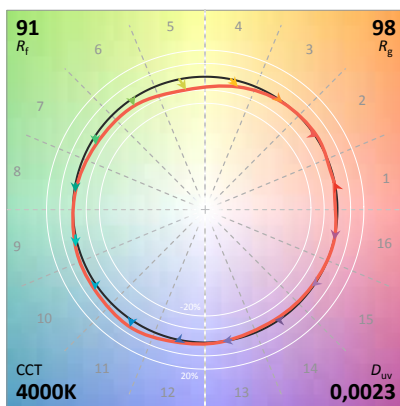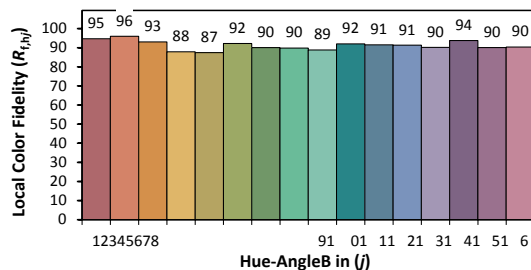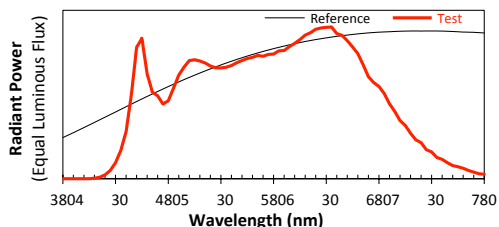

6000K

Ra	99
R9	98
Rf	93,6
Rg	99,8

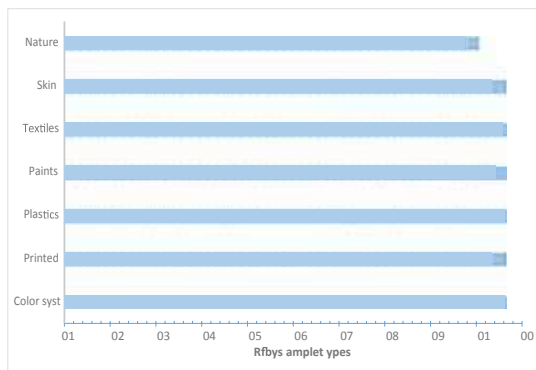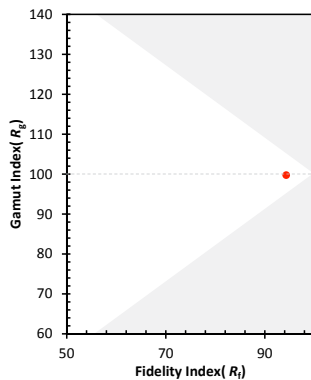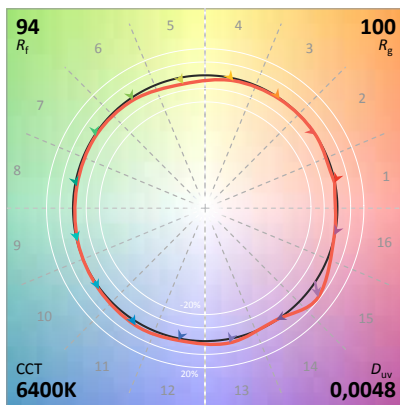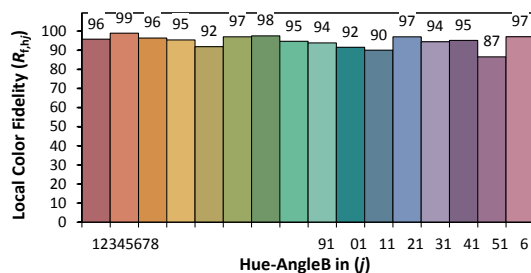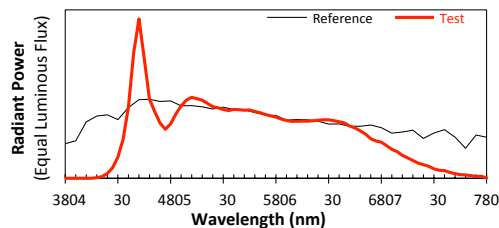

DURASTRIP

DURASTRIP TUNABLE CCT

The colour of the light and emission intensity have a profound influence on people's emotional state, according to Human Centric Lighting principles.

Therefore, using tools like the DURASTRIP CCT is fundamental as they allow dynamic light management to improve the environment and the feelings of the people who find themselves there, to promote well-being and improve performance.

Dynamic light is essential in environments where people remain for a long period of time, such as offices, schools, etc., its use is equally useful to create different atmospheres in the same environment: it allows you to illuminate a restaurant with a vibrant white light at lunch and a softly relaxing light at dinner!

DuraStrip CCT offers two white colour temperature variation options: from 1800K to 3500K or from 2700K to 6500K.

INSTALLATION

Complete with 3M double-sided tape to attach to the surface. When using double-sided tape degrease the application surface adequately.

USAGE INFORMATION

Dimmable 0-100%

DALI - DMX

Analogue and digital domotic control systems

CASAMBI compatible

PACKAGING

Packaged in 5 meters reels.

LED

LED 2216 W+W

240 LED/m

Ra>90

Lifetime: >50,000h

Warranty: 5 years

COLOUR OF THE LIGHT

Choice of white colour temperatures.

BINNING

ANSI/SDCM: 3 step.


CONNECTIONS

IP20: terminals with free wires.

IP65: complete with a 15 cm long IP65/68 M/F cable on 2 sides.

Maximum connection length 5 m. Max 4A.

Strips can be cut to size by following the cutting indications printed on the strips.

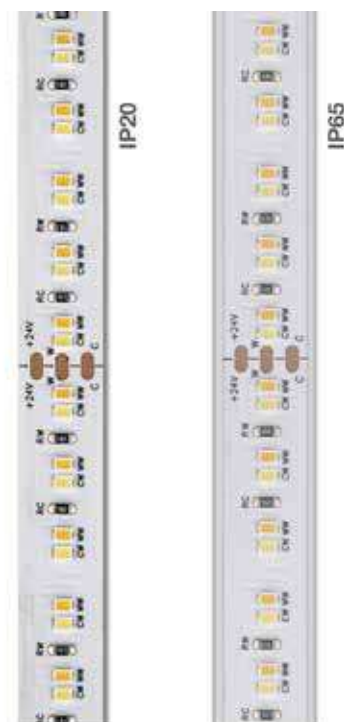

CUSTOM PRODUCTIONS

See details at the beginning of Linear Systems

Cutting DuraStrip to size*:


Fixed cost of piece work

* Respect the cutting pitch. Supplied with 15 cm cable.



VA01

LED SPACING AND PITCH CUT

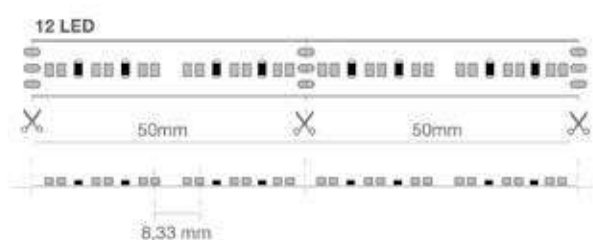


DURASTRIP

DURASTRIP TUNABLE CCT


PRO	24 Vdc	Ra >90		50000 h L70B20	IP20	-25°C +35°C	Risk Group 0				
------------	--------	--------	---	-------------------	------	----------------	-----------------	--	---	---	---

DURASTRIP TUNABLE CCT IP20

	W	W/m	Max lm/m	K	LED/ m	L	L1	H		ART.
New	70	14	1080	1800-3500	240	5000	10	1	1 / 20	07U183524INHC
New	70	14	1080	2700-6500	240	5000	10	1	1 / 20	07U276524INHC

PRO	24 Vdc	Ra >90		50000 h L70B20	IP65	-25°C +35°C	Risk Group 0				
------------	--------	--------	---	-------------------	------	----------------	-----------------	--	---	---	---

DURASTRIP TUNABLE CCT IP65

	W	W/m	Max lm/m	K	LED/ m	L	L1	H		ART.
	70	14	1000	1800-3500	240	5000	12	5	20 / 20	07U183524EXHC ♦
	70	14	1000	2700-6500	240	5000	12	5	20 / 20	07U276524EXHC ♦

♦ Only available with MOQ (20 Reels of 5mt): contact sales department for more information.

DURASTRIP

DURASTRIP DIM-TO-WARM IP20

DURASTRIP DIM-TO-WARM allows the light intensity to be decreased and the colour temperature of the light to be varied at the same time.

By simulating the dimming curve of old incandescent lamps, it ensures the right light for different times of the day and for different activities in the environment, according to the Human Centric Lighting principle.

The single channel dimming technology works on a single chip, "heating" the colour of the light and thus creating a comfortable atmosphere and a natural feeling to the light, to put the user at the centre of the lighting experience.

The 1800-3000K version is particularly desired for installations into hospitality atmospheres, restaurants, etc.

INSTALLATION

Complete with 3M double-sided tape to attach to the surface. When using double-sided tape degrease the application surface adequately.

USAGE INFORMATION

Single channel (see connection diagrams)

Dimmable 10-100%

DALI - DMX

Analogue and digital domotic control systems

Push Dali with ZKCDRAFF controllers

CASAMBI compatible

PACKAGING

Packaged in 5 meters reels.

LED

LED 2216

224 LED/m

Ra>90

Lifetime: >50,000h

Warranty: 5 years

COLOUR OF THE LIGHT

Choice of white colour temperatures.

BINNING


ANSI/SDCM: 3 step.

CONNECTIONS

Terminals with free wires.

Maximum connection length 5 m. Max 4A.

Strips can be cut to size by following the cutting indications printed on the strips.

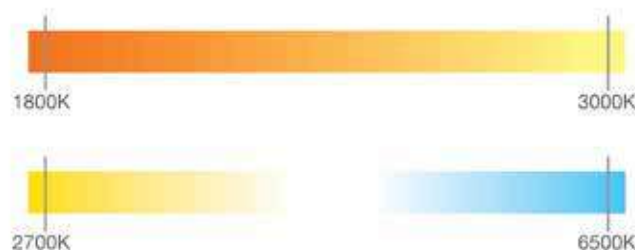

CUSTOM PRODUCTIONS

See details at the beginning of Linear Systems

Cutting DuraStrip to size*:


Fixed cost of piece work

* Respect the cutting pitch. Supplied with 15 cm cable.



VA01



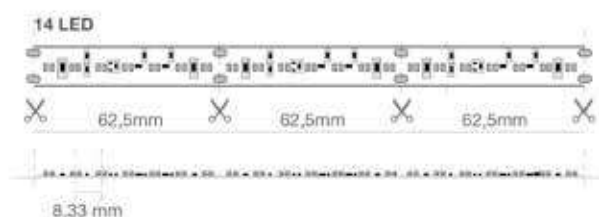







LED SPACING AND PITCH CUT



DURASTRIP

DURASTRIP DIM-TO-WARM IP20

PRO	24 Vdc	Ra >90		50000 h L70B20	IP20	-25°C +35°C	Risk Group 0				
------------	--------	--------	---	-------------------	------	----------------	-----------------	---	---	---	---

									
48	9.6	900	1800-3000	224	5000	12	1	20 / 20	07U18302410INK ♦
48	9.6	900	2700-6000	224	5000	12	1	20 / 20	07U27602410INK ♦

♦ Only available with MOQ (20 Reels of 5mt): contact sales department for more information.

(1) 9,6W @ 3000K; 2,4W @1800K; (2) 9,6W @ 6000K; 2,4W @2700K

DURASTRIP

DURASTRIP DIM-TO-WARM IP65

DURASTRIP DIM-TO-WARM allows the light intensity to be decreased and the colour temperature of the light to be varied at the same time.

By simulating the dimming curve of old incandescent lamps, it ensures the right light for different times of the day and for different activities in the environment, according to the Human Centric Lighting principle.

The single channel dimming technology works on a single chip, "heating" the colour of the light and thus creating a comfortable atmosphere and a natural feeling to the light, to put the user at the centre of the lighting experience.

The 1800-3000K version is particularly desired for installations into hospitality atmospheres, restaurants, etc.

INSTALLATION

Complete with 3M double-sided tape to attach to the surface. When using double-sided tape degrease the application surface adequately.

USAGE INFORMATION

Single channel (see connection diagrams)

Dimmable 10-100%

DALI - DMX

Analogue and digital domotic control systems

Push Dali with ZKCDRAFF controllers

CASAMBI compatible

PACKAGING

Packaged in 5 meters reels.

LED

LED 2216

224 LED/m

Ra>90

Lifetime: >50,000h

Warranty: 5 years

COLOUR OF THE LIGHT

Choice of white colour temperatures.

BINNING


ANSI/SDCM: 3 step.

CONNECTIONS

Complete with IP68 / 68 Male/Female wire on 2 sides, length 15 cm.

Maximum connection length 5 m. Max 4A.

Strips can be cut to size by following the cutting indications printed on the strips.

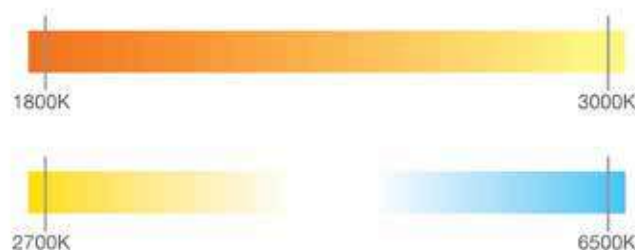

CUSTOM PRODUCTIONS

See details at the beginning of Linear Systems

Cutting DuraStrip to size*:


Fixed cost of piece work

* Respect the cutting pitch. Supplied with 15 cm cable.



VA01


LED SPACING AND PITCH CUT

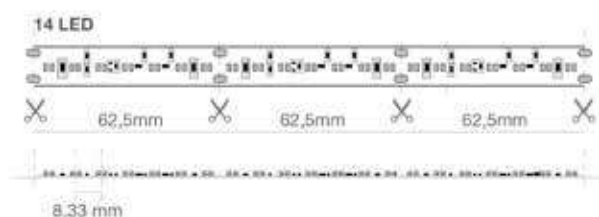

DURASTRIP

DURASTRIP DIM-TO-WARM IP65

PRO	24 Vdc	Ra >90		50000 h L70B20	IP65	-25°C +35°C	Risk Group 0				
------------	--------	--------	---	-------------------	------	----------------	-----------------	---	---	---	---


W max Tot	W/m	lm/m	K	LED/ m	L	L1	H		ART.
48	9.6	900	1800-3000	224	5000	14	4	20 / 20	07U18302410EXK ♦
48	9.6	900	2700-6000	224	5000	14	4	20 / 20	07U27602410EXK ♦

♦ Only available with MOQ (20 Reels of 5mt): contact sales department for more information.

(1) 9,6W @ 3000K; 2,4W @1800K; (2) 9,6W @ 6000K; 2,4W @2700K

ADDITIONAL CUT AND MOUNT KIT FOR STRIP IP68



	ART.
Additional cut and mount kit for Strip IP68	KT68PA

Additional cut and mount kit for Strip IP68 and IP65.
This kit includes 4 terminal blocks with 15 cm wire, 10 silicone fixing bridges with screws.

DURASTRIP

DURASTRIP EXTREME TUNABLE CCT IP20

This strip adds to the characteristics of the CCT, which varies the white from 3000K to 6500K, and the potential offered by an LED that encloses the Red Green and Blue spectra + a very warm amber colour (wonderful for the "ancient stone" effect).

DURASTRIP Extreme Tuneable gives the designer the freedom to choose previously unthinkable shades of light without using complex electronic equipment and create the most diverse and new, pleasant and amazing lighting scenes using just one strip.

INSTALLATION

Complete with 3M double-sided tape to attach to the surface. When using double-sided tape degrease the application surface adequately.

Always use with aluminium profiles for heat dissipation.

USAGE INFORMATION

NOTE: 6 channels needed

Dimmable 0-100% Flicker Free

DMX

Analogue and digital domotic control systems

PACKAGING

Packaged in 5 meters reels.

LED

LED 5050RGBA+5050 CCT

96 LED/m

Ra>80

Lifetime: >50,000h

Warranty: 5 years

BINNING


ANSI/SDCM: 3 step.

CONNECTIONS

Terminals with free wires.

Maximum connection length 5 m.

Strips can be cut to size by following the cutting indications printed on the strips.

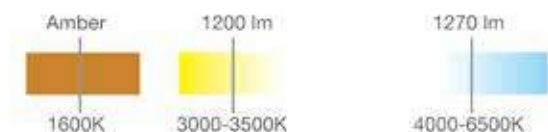

CUSTOM PRODUCTIONS

See details at the beginning of Linear Systems

Cutting DuraStrip to size*:


Fixed cost of piece work

* Respect the cutting pitch. Supplied with 15 cm cable.







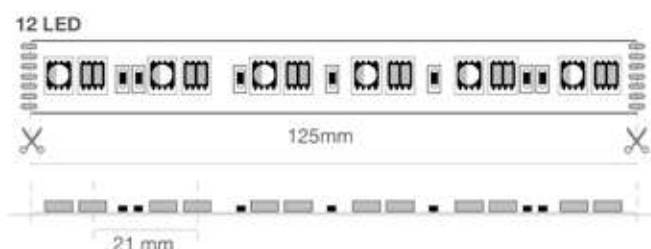

VA01

LED SPACING AND PITCH CUT



DURASTRIP

DURASTRIP EXTREME TUNABLE CCT IP20

PRO	24 Vdc	Ra >80		50000 h L70B20	IP20	-25°C +35°C	Risk Group 0				
W	W/m	lm/m	K	LED/ m	L	L1	H		ART.		
115	23	1250	3000-6500K + RGBA	96	5000	15	2	1 / 20	07UET2423IN		

DURASTRIP

DURASTRIP EXTREME TUNABLE CCT IP65

Why Extreme Tunable?

This strip adds to the characteristics of the CCT, which varies the white from 3000K to 6500K, and the potential offered by an LED that encloses the Red Green and Blue spectra + a very warm amber colour (wonderful for the "ancient stone" effect).

DURASTRIP Extreme Tuneable gives the designer the freedom to choose previously unthinkable shades of light without using complex electronic equipment and create the most diverse and new, pleasant and amazing lighting scenes using just one strip.

INSTALLATION

Complete with 3M double-sided tape to attach to the surface. When using double-sided tape degrease the application surface adequately.

Always use with aluminium profiles for heat dissipation.

USAGE INFORMATION

NOTE: 6 channels needed

Dimmable 0-100% Flicker Free

DMX

Analogue and digital domotic control systems

PACKAGING

Packaged in 5 meters reels.

LED

LED 5050RGBA+5050 CCT

96 LED/m

3000K - 6500K: Ra>80

Lifetime: >50,000h

Warranty: 5 years

COLOUR OF THE LIGHT

Choice of colour temperature in the whites + RGBA:

3000K - 6500K + RGB + AMBRA 1600K

BINNING


ANSI/SDCM: 3 step.

CONNECTIONS

Complete with IP68 / 68 Male/Female wire on 2 sides, length 15 cm.

Maximum connection length 5 m.

Strips can be cut to size by following the cutting indications printed on the strips.

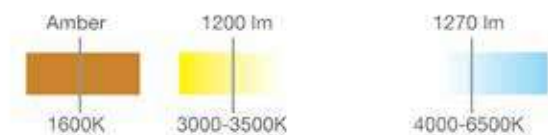

CUSTOM PRODUCTIONS

See details at the beginning of Linear Systems

Cutting DuraStrip to size*:


Fixed cost of piece work

* Respect the cutting pitch. Supplied with 15 cm cable.







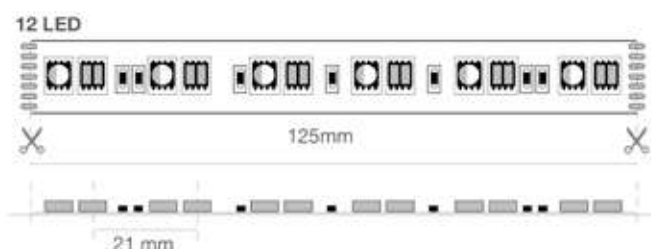

VA01

LED SPACING AND PITCH CUT



DURASTRIP

DURASTRIP EXTREME TUNABLE CCT IP65

PRO	24 Vdc	Ra >80		50000 h L70B20	IP65	-25°C +35°C	Risk Group 0				
W	W/m	lm/m		K	LED/ m	L	L1	H			ART.
115	23	1250		3000-6500K + RGBA	96	5000	17	5	20 / 20		07UET2423EX ♦

♦ Only available with MOQ (20 Reels of 5mt): contact sales department for more information.

DURASTRIP

DURASTRIP FOOD

IP68 LED strips for special applications in food retail and distribution.
Colour of the light: white with specific spectra.
Produced with calibrated spectra to improve visual perception of goods in different product sectors: the food retail, baked goods and hospitality industries.

FEATURES

Produced with calibrated spectra to improve visual perception of goods in different product sectors.

INSTALLATION

Complete with 3M double-sided tape to attach to the surface.
When using double-sided tape degrease the application surface adequately.

PACKAGING

Packaged in 5 meters reels.

LED

120 LED/m
Lifetime: >50,000h
Warranty: 5 years

CONNECTIONS

Complete with IP68 / 68 Male/Female wire on 2 sides, length 15 cm.
Maximum connection length 5 m.
Strips can be cut to size by following the cutting indications printed on the strips.



CUSTOM PRODUCTIONS

See details at the beginning of Linear Systems

Cutting DuraStrip to size*:


Fixed cost of piece work

* Respect the cutting pitch. Supplied with 15 cm cable.




VA01

LED SPACING AND PITCH CUT

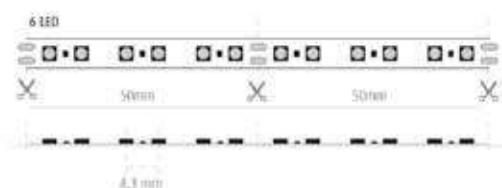



DURASTRIP

DURASTRIP FOOD



DURASTRIP FOOD IP68

W	W/m	lm/m		LED/m	L	L1	H		ART.
70	14	730	Meat	120	5000	12	4	1 / 1	05URE2414XO
70	14	970	Bread	120	5000	12	4	1 / 1	05UYE2414XO
70	14	1070	Vegetables	120	5000	12	4	1 / 1	05UWE2414XO
70	14	1180	Fish	120	5000	12	4	1 / 1	05UCE2414XO

DURASTRIP

DURASTRIP PRO60 RGB IP20

DURASTRIP PRO60 RGB were designed to satisfy the range of use that requires an excellent product as well as cost optimization. The PRO60 RGB range has a substrate that is optimised for power management in relation to flow and useful life. Excellent light emission and colour control over time.

INSTALLATION

Complete with 3M double-sided tape to attach to the surface and jumpers to be screwed to the surface. When using double-sided tape degrease the application surface adequately.

USAGE INFORMATION

Dimmable 0-100% Flicker Free
DMX with ZKCDMXWFF, ZKCDMX-RFF controller
Analogue and digital domotic control systems
CASAMBI compatible

PACKAGING

Packaged in 5 meters reels.

LED

LED 5050
60 LED/m
R=615-625nm; G=520-530nm; B=465-475nm;
Lifetime: >50,000h
Warranty: 5 years

COLOUR OF THE LIGHT

RGB

CONNECTIONS

Maximum connection length 5 m. Max 4A.
For longer connections, connect in series or parallel, see diagram.
Strips can be cut to size by following the cutting indications printed on the strips.



CUSTOM PRODUCTIONS

See details at the beginning of Linear Systems

Cutting DuraStrip to size*:


Fixed cost of piece work

* Respect the cutting pitch. Supplied with 15 cm cable.







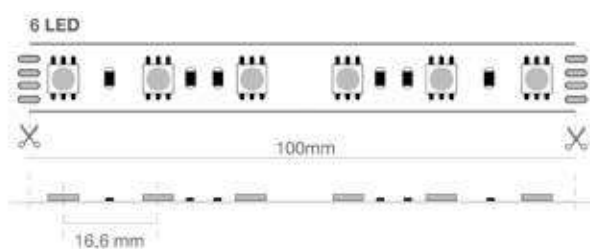


VA01

LED SPACING AND PITCH CUT



DURASTRIP

DURASTRIP PRO60 RGB IP20

PRO	24 Vdc	Ra >80		50000 h L70B20	IP20	-25°C +35°C	Risk Group 0				
W	W/m		LED/ m	L	L1	H		ART.			
50	10	RGB	60	5000	10	2	1 / 20	07URGB2410IN-SB			

DURASTRIP

DURASTRIP PRO60 RGB IP65

DURASTRIP PRO60 RGB were designed to satisfy the range of use that requires an excellent product as well as cost optimization. The PRO60 RGB range has a substrate that is optimised for power management in relation to flow and useful life. Excellent light emission and colour control over time.

INSTALLATION

Complete with 3M double-sided tape to attach to the surface and jumpers to be screwed to the surface. When using double-sided tape degrease the application surface adequately.

USAGE INFORMATION

Dimmable 0-100% Flicker Free
DMX with ZKCDMXWFF, ZKCDMX-RFF controller
Analogue and digital domotic control systems
CASAMBI compatible

PACKAGING

Packaged in 5 meters reels.

LED

LED 5050
60 LED/m
R=615-625nm; G=520-530nm; B=465-475nm;
Lifetime: >50,000h
Warranty: 5 years

COLOUR OF THE LIGHT

RGB

CONNECTIONS

Complete with a 15 cm long IP65/68 M/F cable on 2 sides. Maximum connection length 5 m. Max 4A. For longer connections, connect in series or parallel, see diagram. Strips can be cut to size by following the cutting indications printed on the strips. For IP65/IP68 strips, restore the IP protection after cutting.



CUSTOM PRODUCTIONS

See details at the beginning of Linear Systems

Cutting DuraStrip to size*:


Fixed cost of piece work

* Respect the cutting pitch. Supplied with 15 cm cable.







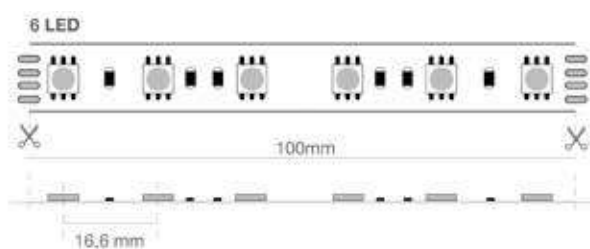


VA01

LED SPACING AND PITCH CUT



DURASTRIP

DURASTRIP PRO60 RGB IP65

PRO	24 Vdc	Ra >80		50000 h L70B20	IP65	-25°C +35°C	Risk Group 0		 120°		
W	W/m		LED/ m	L	L1	H		ART.			
50	10	RGB	60	5000	14	4	1 / 10	07URGB2410EX-SB			

KIT FOR RGB STRIP



	ART.		
Cut and mount kit for Strip IP68 and IP65 - RGB	1 / 1	KT68PA-RGB	

This kit includes 4 terminal blocks with 15 cm wire, 10 pcs end caps, 10 pcs silicone fixing bridges with screws.

DURASTRIP

DURASTRIP RGB + WHITE IP20

RGBW DURASTRIP, RGB colours along with a shade of warm white.

Introducing a white spectrum the saturated RGB tones are "intensified" and the nuances that can be obtained increase: at the same time white can be enriched with RGB colours to obtain surprising pastel tones.

RGBW offer the possibility to obtain a "real" white in the indicated tone, 2700K or 3000K and not a white obtained by overlapping red-green-blue, i.e. the one produced by RGB strips.

White emission from the LED quad is more efficient than coloured LED sources which means RGBW strips are more high performance and suitable for professional uses.

They can be interfaced with special 4 channel controllers, Code ZKCDMXW to obtain all required tones in a continuous way.

INSTALLATION

Complete with 3M double-sided tape to attach to the surface and jumpers to be screwed to the surface.

When using double-sided tape degrease the application surface adequately.

USAGE INFORMATION

Dimmable 0-100%

DMX

Analogue and digital domotic control systems

CASAMBI compatible

POWER SUPPLY

Full power RGB+White = 75W; only white = 18W; only red = 22W; only blue = 18W; only green = 16W.

PACKAGING

Packaged in 5 meters reels.

NOTES

Different LED packaging technology with this strip with 4-in-1 CHIP that makes it possible to obtain an unrivalled uniform light output. A perfect colour mix.

LED

Lifetime: >30,000h

Warranty: 3 years

COLOUR OF THE LIGHT

RGB + 2700K

RGB + 3000K

CONNECTIONS

Terminals with free wires.

Maximum connection length 5 m. Max 4A in total.

For longer connections, connect in series or parallel, see diagram.

Strips can be cut to size by following the cutting indications printed on the strips.



CUSTOM PRODUCTIONS

See details at the beginning of Linear Systems

Cutting DuraStrip to size*:


Fixed cost of piece work

* Respect the cutting pitch. Supplied with 15 cm cable.




VA01

LED SPACING AND PITCH CUT

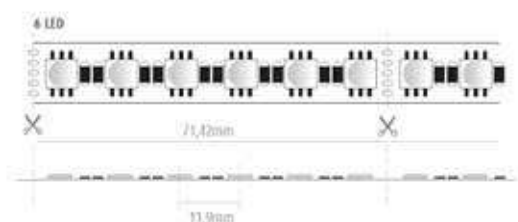

DURASTRIP

DURASTRIP RGB + WHITE IP20



W	lm/m	K	LED/m	L	L1	H		ART.
75	520	2700K + RGB	84	5000	12.3	2.2	20 / 20	07575RGBW ♦

♦ Only available with MOQ (20 Reels of 5mt): contact sales department for more information.

DURASTRIP

DURASTRIP RGB + WHITE IP68

RGBW DURASTRIP, RGB colours along with a shade of warm white.

Introducing a white spectrum the saturated RGB tones are "intensified" and the nuances that can be obtained increase: at the same time white can be enriched with RGB colours to obtain surprising pastel tones.

RGBW offer the possibility to obtains a "real" white in the indicated tone, 2700K or 3000K and not a white obtained by overlapping red-green-blue, i.e. the one produced by RGB strips.

White emission from the LED quad is more efficient than coloured LED sources which means RGBW strips are more high performance and suitable for professional uses.

They can be interfaced with special 4 channel controllers, Code ZKCDMXW to obtain all required tones in a continuous way.

USAGE INFORMATION

Dimmable 0-100%

DMX

Analogue and digital domotic control systems

CASAMBI compatible

POWER SUPPLY

Full power RGB+White = 75W; only white = 18W; only red = 22W; only blue = 18W; only green = 16W.

Full power RGB+ White = 47W; only white = 28W; only RGB = 19W.

PACKAGING

Packaged in 5 meters reels.

NOTES

Different LED packaging technology with this strip with 4-in-1 CHIP that makes it possible to obtain an unrivalled uniform light output. A perfect colour mix.

LED

LED 5050RGB 4-in-1

24VDC

Lifetime: >30,000h

Warranty: 3 years

COLOUR OF THE LIGHT

RGB + 2700K

RGB + 3000K

CONNECTIONS

Complete with a 15 cm long IP65/68 M/F cable on 2 sides.

Maximum connection length 5 m. Max 4A in total.

For longer connections, connect in series or parallel, see diagram.

Strips can be cut to size by following the cutting indications printed on the strips.

For IP65/IP68 strips, restore the IP protection after cutting.



CUSTOM PRODUCTIONS

See details at the beginning of Linear Systems

Cutting DuraStrip to size*:


Fixed cost of piece work

* Respect the cutting pitch. Supplied with 15 cm cable.





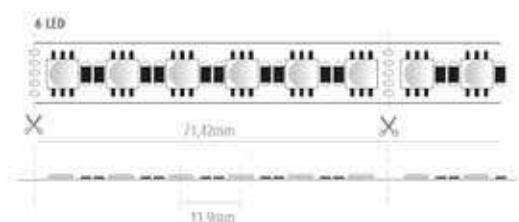


VA01


LED SPACING AND PITCH CUT



DURASTRIP

DURASTRIP RGB + WHITE IP68

PRO	24 Vdc		30000 h L70B20	IP68	-25°C +35°C	Risk Group 0				
------------	--------	---	-------------------	------	----------------	-----------------	---	---	---	---

W	lm/m	K	LED/ m	L	L1	H		ART.
75	520	3000K + RGB	84	5000	15	4	20 / 20	07375RGBW ◆

◆ Only available with MOQ (20 Reels of 5mt): contact sales department for more information.

KIT FOR RGBW STRIP



	ART.
Cutting kit for RGBW strip	KT68PA-RGBW ▼

Kit for RGBW strip.
This kit includes 4 terminal blocks with 15 cm wire, 10 pcs end caps, 10 pcs silicone fixing bridges with screws.
▼ To be discontinued.

DURASTRIP

DURASTRIP EXTRA NARROW RGB

The EXTRA NARROW series is a concentrate of quality materials that they share with other DURASTRIP: high quality choices to ensure a professional level performance, excellent heat dissipation and long duration.

EXTRA NARROW is the range with the smallest substrate in the entire collection. Just 5 mm wide - 6 mm for the RGB version- it solves all needs not only connected to confined spaces but above all for particularly light and characteristic "light designs", even when using the infinite range of RGB colours.

The type of LED source used and the short LEDS' center to center distance eliminate the dot effect also in profiles with lenses that are very close to the base.

INSTALLATION

Complete with 3M double-sided tape to attach to the surface. When using double-sided tape degrease the application surface adequately.

USAGE INFORMATION

Dimmable 0-100%

DALI - DMX

Analogue and digital domotic control systems

Push Dali with ZKCDA controllers

CASAMBI compatible

PACKAGING

Packaged in 3 meters reels.

LED

LED 3535RGB

120 LED/m

Lifetime: >50,000h

Warranty: 5 years

COLOUR OF THE LIGHT

RGB

CONNECTIONS

IP20: terminals with free wires.

Maximum connection length 5 m. Max 4A.

For longer connections, connect in series or parallel, see diagram.

Strips can be cut to size by following the cutting indications printed on the strips.



CUSTOM PRODUCTIONS

See details at the beginning of Linear Systems

Cutting DuraStrip to size*:


Fixed cost of piece work

* Respect the cutting pitch. Supplied with 15 cm cable.







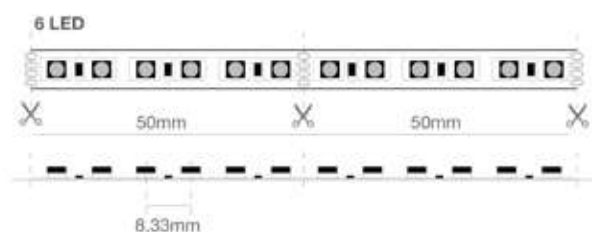


VA01

LED SPACING AND PITCH CUT



DURASTRIP

DURASTRIP EXTRA NARROW RGB

PRO	24 Vdc		50000 h L70B20	IP20	-25°C +35°C	Risk Group 0				
W	W/m		LED/ m	L	L1	H		ART.		
43.2	14.4	RGB	120	3000	6	3.5	1 / 20	07URGB2412INEN ▼		

▼ To be discontinued.



DURANEONFLEX

The DuraNeonFlex collection is the best tool for following the fluid shapes of contemporary architecture or creative lighting, obtaining unprecedented effects: a light strip that can be twisted up to 360° in one meter! DuraNeonFlex are made from high-quality materials and offer a choice of three types of connection: in-line, side or rear.


Here below the various options of the DuraNeonFlex collection:

DURANEONFLEX




DuraNeonFlex is an extruded flexible silicone profile, complete of with a 120 LEDs per metre strip.

DURANEONFLEX-Q

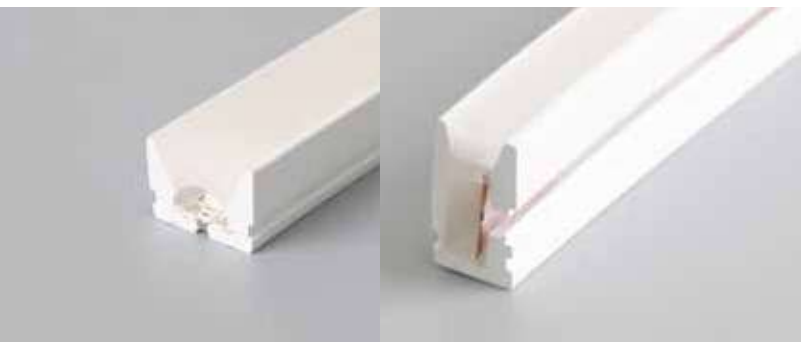

DURANEONFLEX-Q
This is the rectangular section proposal: both models include Top and VERT versions, for bending radii of up to 12 cm!

DURANEONFLEX TWIST

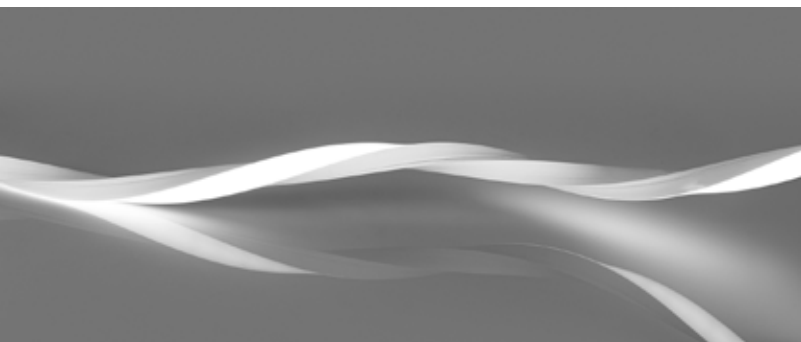


DuraNeonFlex Twist è lo strumento ottimale per seguire le forme fluide dell'architettura contemporanea, in grado di seguire percorsi curvilinei.

DURANEONFLEX MINI



Una linea di luce molto sottile (8mm), senza puntinatura, senza limitazioni di taglio, flessibile fino a poter creare curve di 30mm e con la disponibilità di 8 colori oltre alla luce bianca.

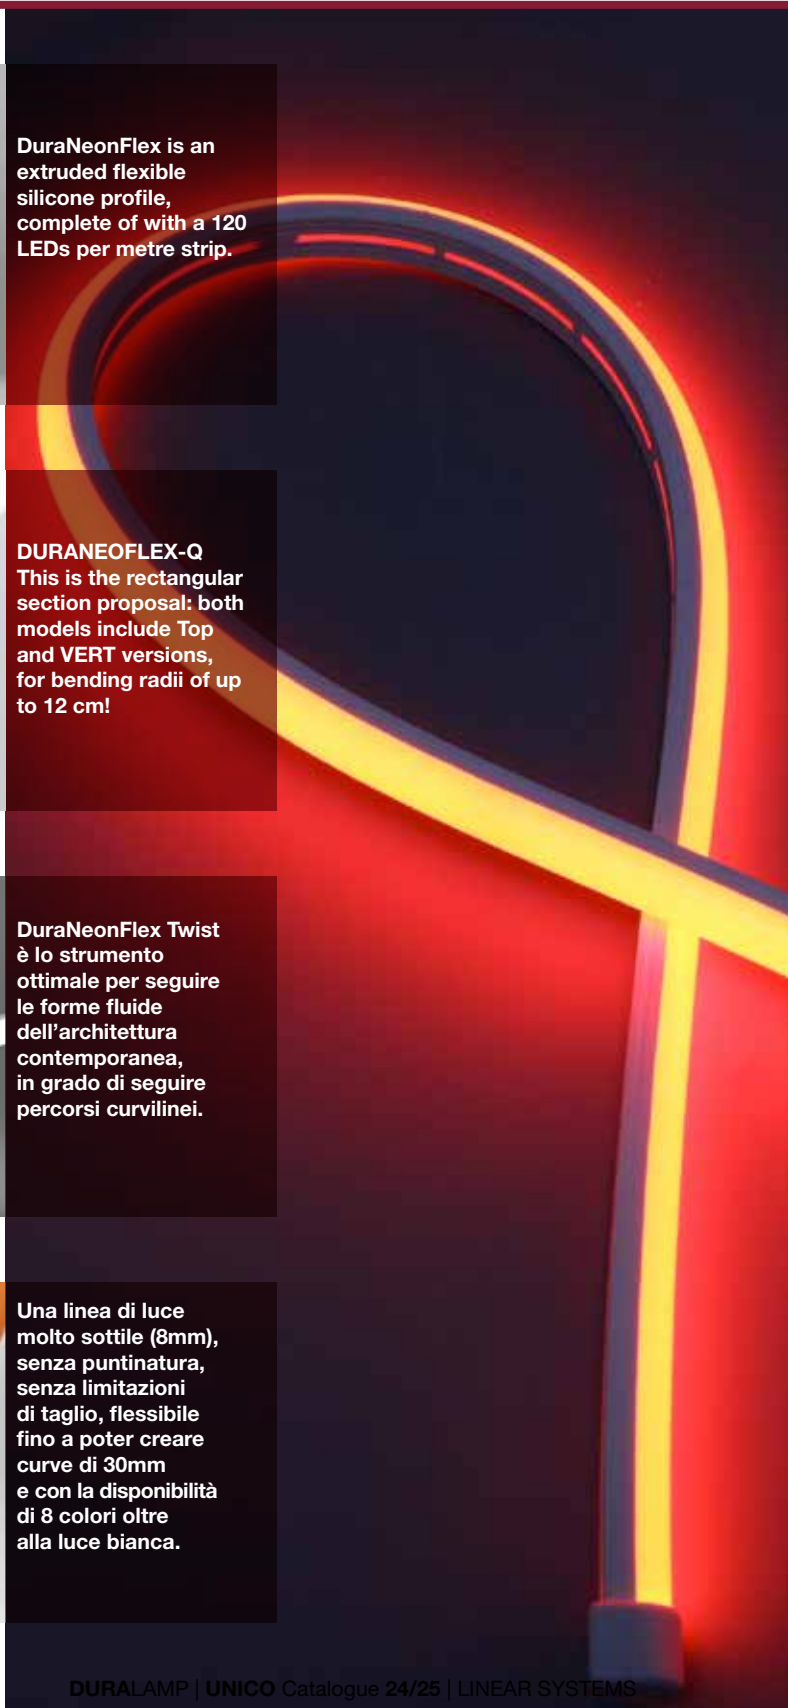

COMPARISON TABLE OF DNF CHARACTERISTICS


				
	DNF FLEX	DNF FLEX-Q	DNF TWIST	DNF MINI
LIGHT EMISSION	TOP/VERT	TOP/VERT	TWIST	TOP/VERT
PITCH OF CUT	5 cm	5 cm	Free cut!	Free cut!
MAXIMUM LENGTH	10 metres	10 metres	5 metres	10 metres
DIMENSIONS	TOP: 16 x 15h mm VERT: 8,8 x 20h mm	TOP: 16 x 12h mm VERT: 8,8 x 17h mm	16 x 15h mm	7 x 15h mm
BENDING RADIUS	TOP: 200 mm VERT: 120 mm	TOP: 300 mm VERT: 120 mm	60 mm	60 mm
TORSION	No twisting allowed	No twisting allowed	360° in 1 m	360° in 30 cm
LIGHT COLOUR	White light Colours	White light Colours	White light	White light Colours
CONNECTIONS	- IN LINE - LATERAL - REAR	- IN LINE - LATERAL - REAR	- IN LINE - LATERAL - REAR	- IN LINE - LATERAL - REAR
ACCESSORIES	Flexible profile Rigid profile Fixing clips	Flexible profile Rigid profile Fixing clips	Flexible profile Rigid profile Fixing clips	Fixing clips
DIMMERABILITY	0-100%	0-100%	0-100%	0-100%
IP	IP65	IP65	IP65	IP65
LIFETIME	50000h INDOOR 35000h OUTDOOR	50000h INDOOR 35000h OUTDOOR	50000h INDOOR 35000h OUTDOOR	50000h INDOOR 35000h OUTDOOR
WARRANTY				

CHOICE OF COLOURS
AMONG
THE VARIOUS MODELS:
WHITES
AND PURE COLOURS





DURANEONFLEX

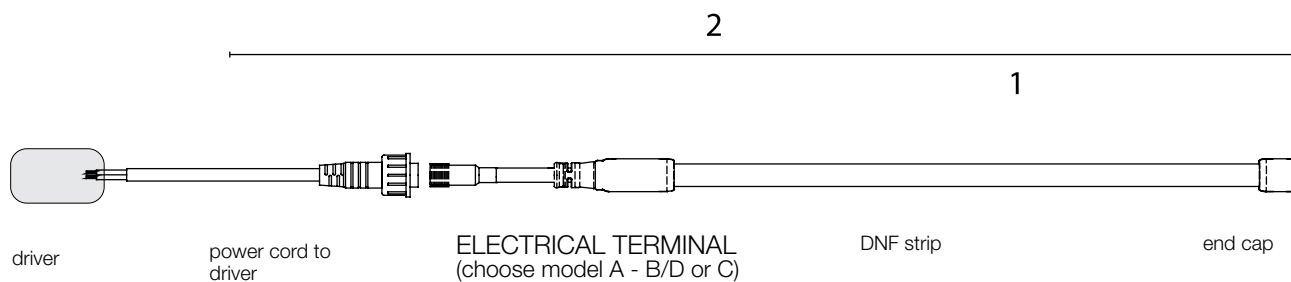

Duraneonflex (in short DNF) is configured in the following 2 methods both with a minimum quantity to be confirmed with the sales force:

1

DURANEONFLEX

without terminals



Provided by meters, max length 10 m according to model (professional use 50 mt reel also available); cut every 5 cm. They can be field cut as the cutting point is clearly indicated. Terminals and other accessories must be ordered with their separate codes.

DNF Strips with end cap are IP40; if properly sealed with glue they provide IP65.

SUPPLIED ALREADY CUT AT REQUESTED MEASURES

FOR OUTDOOR AND INDOOR USE, CUT AT REQUESTED MEASURES

2





DURANEONFLEX

complete with terminal: A - B/D - C



Factory prepared DNF are complete with the chosen terminal and end cap. The power cord with plug for driver connection is INCLUDED into the package. Provided in meters, max length 10 m; cut every 5 cm.

Factory prepped DNF Strips are IP65.



Code composition


The list of principal codes for DuraNeonFlex TOP and VERT can be found on the following pages.

DNF strips without terminals are available both in 10 m standard reels (50 m professional reel also available) or with custom cut size.


Maximum length per single power supply: 10 m.

The required length for your custom cut is to be added at the end of the code using 4 digits for the size in cm. Max length is 10 m.

Only strip: accessories to be added

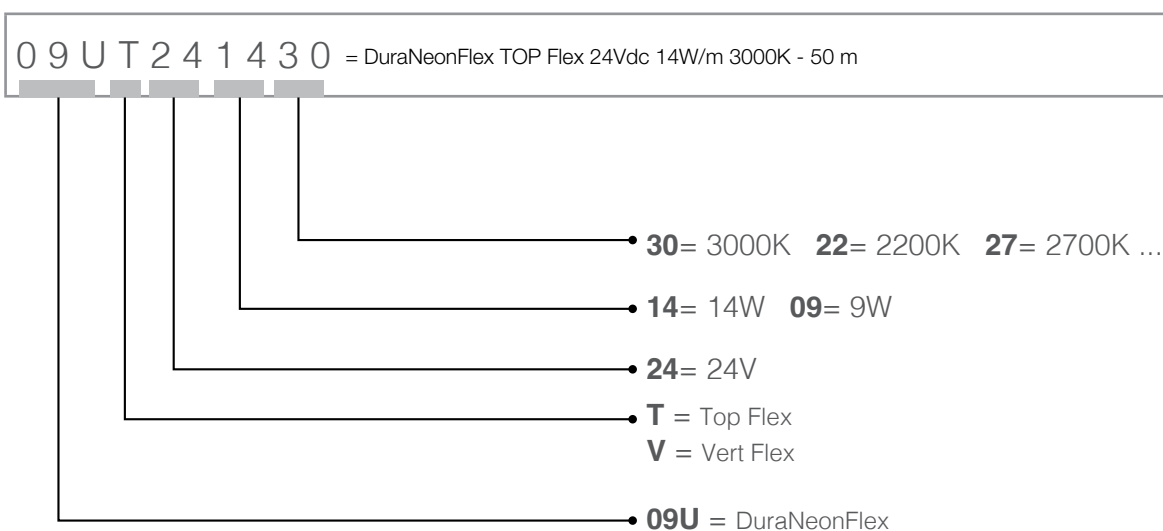

Strip complete with connector, power cord and end cap

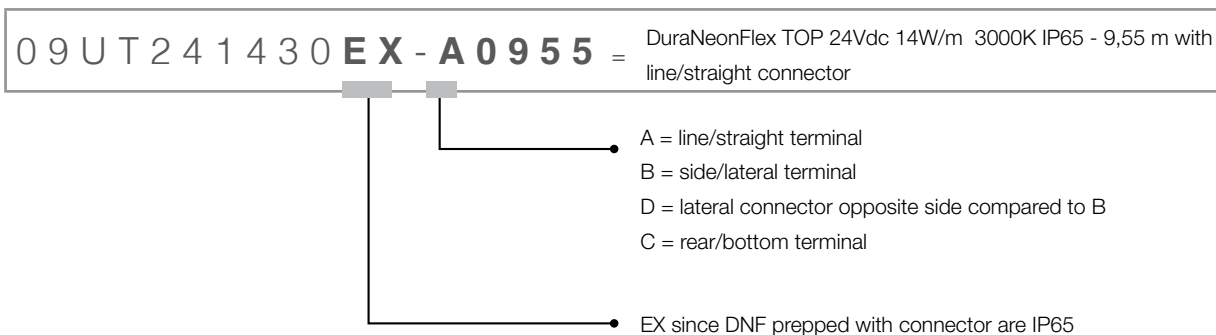



FLEXIBILITY, RELIABILITY, SAFETY.

But also light quality and light colour stability over time.


And the possibility of creating long lines of light, excellent colour rendering, etc.

DURASTRIP and DuraNeonFlex range: loved by lighting designers all over the world!




MOUNTING, CABLING AND CONNECTION SOLUTIONS

Terminal wiring

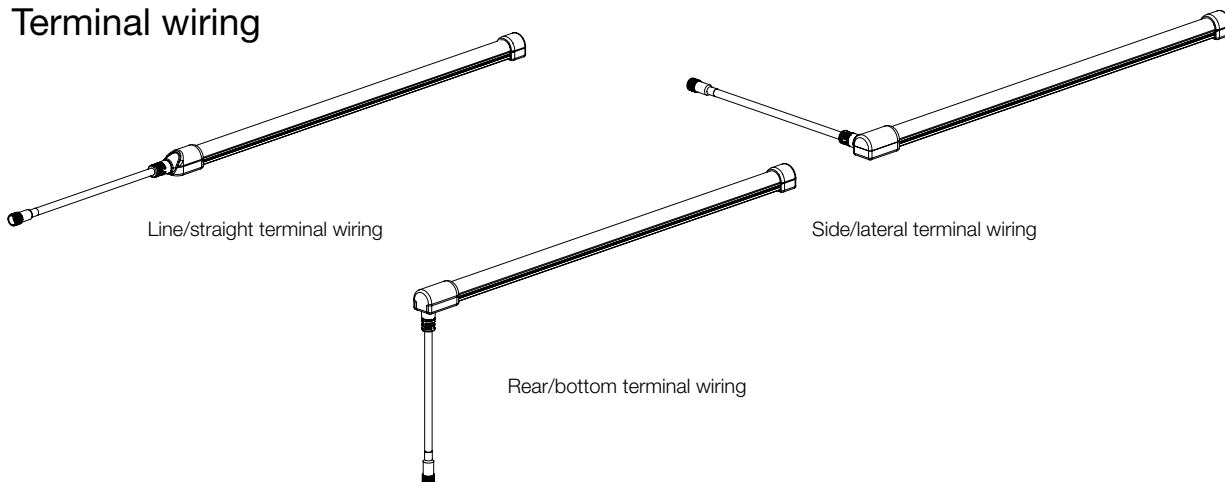

Jumper for strips connection



Jumper for 'in line'* cabling connections




Jumper for 'lateral'* cabling connections




Jumper for 'rear'* cabling connections

Surface mounting

Transparent 'omega shape' clips




Aluminum channel

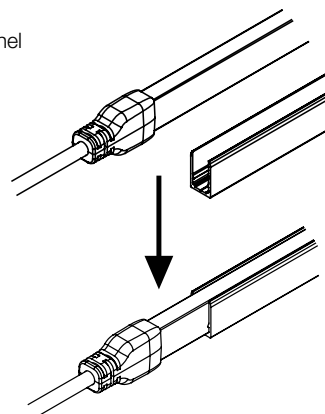


Recessed mounting

PC clip for DNF anchoring



Flexible metal profile

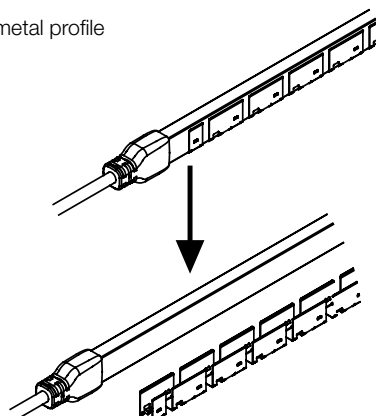

DuraNeonFlex

DURANEONFLEX TOP

DuraNeonFlex is a flexible extruded silicone profile, complete with 120 LEDs per meter strip.

The narrow pitch of the chips and Integrated Circuit technology make DNF a perfect light line, homogenous on all its 10 meters of length.

TPOLOGY

DuraNeonFlex features a rounded section.

TOP flex Version: the light is emitted on the upper side of the light channel.

FEATURES

Flexible light line with continuous lighting: so flexible you can create curves with a minimum diameter of 12 cm for VERT models.

Anti-glare diffuser function.

Maximum length per single power supply: 10 metres.

INSTALLATION

It is attached to the surface with the clips; it can be cut following the cutting marks (5cm).

DNF is equipped with different terminals for power supply: in-line, side and rear connection to the profile to meet any installation requirement.

MATERIAL

Extremely flexible, impact resistant and weatherproof extruded silicone.

USAGE INFORMATION

DuraNeonFlex are dimmable like all DURASTRIP.

PACKAGING

DNF can be supplied at any specific length (max length 10 meters for single power supply, cut every 5 cm) with or without the electrical terminals or in 10 m and 50 m reels without terminals.



CUSTOM PRODUCTIONS

See details at the beginning of Linear Systems

Cutting DuraNeonFlex to size*:

VA02








Fixed cost of piece work

* Respect the cutting pitch. Supplied with 30 cm cable.

DuraNeonFlex

DURANEONFLEX TOP

PLUS	24 Vdc	Ra >80		36000 h L70B20	IP65	IK07	-25°C +35°C	Risk Group 0				
-------------	--------	--------	---	-------------------	------	------	----------------	-----------------	---	---	---	---










DURANEONFLEX TOP WHITE

W	W/m	lm/m	K	L	L1	H		ART.
90	9	510	2700	10000	16	15	1 / 1	09UT240927
90	9	540	3000	10000	16	15	1 / 1	09UT240930
90	9	540	3500	10000	16	15	1 / 1	09UT240935 ♦
90	9	570	4000	10000	16	15	1 / 1	09UT240940
90	9	590	6500	10000	16	15	1 / 1	09UT240965 ♦
140	14	760	2700	10000	16	15	1 / 1	09UT241427
140	14	800	3000	10000	16	15	1 / 1	09UT241430
140	14	800	3500	10000	16	15	1 / 1	09UT241435 ♦
140	14	840	4000	10000	16	15	1 / 1	09UT241440
140	14	880	6500	10000	16	15	1 / 1	09UT241465 ♦

♦ Only available with MOQ (5 Reels of 10 mt): contact sales department for more information.

PLUS	24 Vdc		36000 h L70B20	IP65	IK07	-25°C +35°C	Risk Group 0				
-------------	--------	---	-------------------	------	------	----------------	-----------------	---	---	---	---

DURANEONFLEX TOP COLOR

	W	W/m	L	L1	H		ART.
	90	9	10000	16	15	1 / 1	09UT2409RD ♦
	90	9	10000	16	15	1 / 1	09UT2409VR ♦
	90	9	10000	16	15	1 / 1	09UT2409GL ♦
	90	9	10000	16	15	1 / 1	09UT2409OR ♦
	90	9	10000	16	15	1 / 1	09UT2409BL ♦
	90	9	10000	16	15	1 / 1	09UT2409AM ♦
	140	14	10000	16	15	1 / 1	09UT24RGB ♦

♦ Only available with MOQ (5 Reels of 10 mt): contact sales department for more information.

DNF TOP WIRING KIT



		ART.
DNF TOP wiring kit	1 / 1	KT09UTL1
DNF TOP RGB wiring kit	1 / 1	KT09UTRGL1 ●

DNF TOP wiring kit including output line/straight exit wire + end cap + 30 cm long power cord for driver connection.

DNF Strips with end cap are IP40; if properly sealed with glue they provide IP65.

This wiring kit corresponds to the suffix **A** in the codes of finished end prepared product.


● On request.

Accessories

DURANEONFLEX TOP

DNF TOP LINEAR WIRING





		
DNF TOP linear wiring	1 / 1	KT09UTJM1
DNF TOP RGB wiring jumper	1 / 1	KT09UTRGBJM1 ●

DNF TOP linear wiring jumper 30 cm (3 pieces).

● On request.

DNF TOP WIRING KIT



		
DNF TOP wiring kit	1 / 1	KT09UTL2
DNF TOP RGB wiring kit	1 / 1	KT09UTRGBL2 ●

DNF TOP wiring kit including output side/lateral terminal + end cap.

DNF Strips with end cap are IP40; if properly sealed with glue they provide IP65.

This wiring kit corresponds to the suffix **B** in the codes of finished end prepared product.

● On request.



		
DNF TOP wiring kit	1 / 1	KT09UTL2D



DNF TOP wiring kit including output side/lateral exit wire "D" (opposite direction with L2B), free wires + silicone end cap.

DNF Strips with end cap are IP40; if properly sealed with glue they provide IP65.

This wiring kit corresponds to the suffix **D** in the codes of finished end prepared product.

DNF TOP FLEX WIRING KIT



		
DNF TOP wiring kit	1 / 1	KT09UTL3
DNF TOP RGB wiring kit	1 / 1	KT09UTRGBL3 ●


DNF TOP Flex wiring kit including rear/bottom exit wire + end cap + 30 cm long power cord for driver connection.

DNF Strips with end cap are IP40; if properly sealed with glue they provide IP65.

This wiring kit corresponds to the suffix **C** in the codes of finished end prepared product.

● On request.

DNF TOP RGB WIRING JUMPER



		
DNF TOP RGB wiring jumper	1 / 1	KT09UTRGBJM3 ●

DNF TOP RGB Flex rear wiring jumper 30 cm (3 pieces).

● On request.

DNF TOP FLEX TRANSPARENT 'OMEGA SHAPE' CLIPS KIT



		
DNF TOP clips kit	1 / 1	KT09UTS1

Includes 5 clips and 10 screws.

Accessories

DURANEONFLEX TOP

DNF TOP FLEX CLIPS KIT



DNF TOP bottom fixing clips

DNF TOP Flex bottom fixing clips.
Includes 5 clips and 5 screws.



1 / 1



KT09UTC1

CONNECTORS



Junction connector

TOP Flex Junction connector between two sections of DNF.
Available only for DNF TOP Flex models.



1 / 1



KT09UTJ1

DNF TOP FLEX ALUMINUM CHANNEL



DNF TOP aluminum channel

DNF TOP Flex 1 pcs of aluminum channel length 965 mm + 2 pcs of screws (terminals rest outside of the channel).

● On request.



1 / 1



KT09UTP1 ●

FLEXIBLE PROFILE FOR DNF TOP AND DNF-Q TOP



Flexible profile L.20 m

Flexible metal profile for DNF TOP and DNF-Q TOP models.



1 / 1




KTUTFP2



KT09UTP1





KTUTFP2

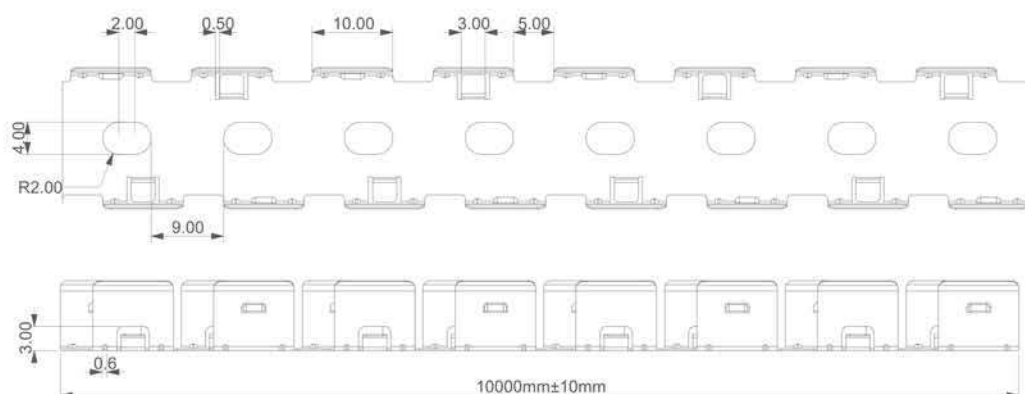








INSTALLATION AND ASSEMBLY DETAILS

DNF are extremely flexible strips but it is important not to force the curvature beyond the specified limits. Installations that do not comply with these instructions cannot be covered by warranty. Take care not to twist the product during installation.

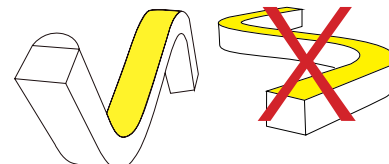



TWISTING
No twisting allowed


DNF / VERT




Connector insertion details

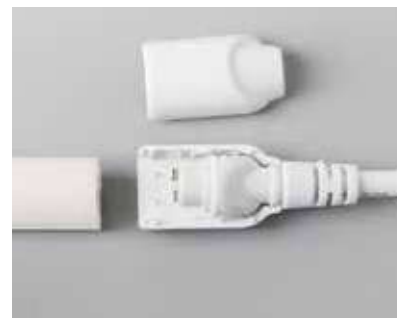


LED chip protections



Insert the protection on top of the strip to avoid squashing the chip




Insert the connector to the back of the strip (if inserted on top of the strip the LED can be damaged)






Add silicone glue in the groove for sealing

TECH DRAWINGS

DNF TOP

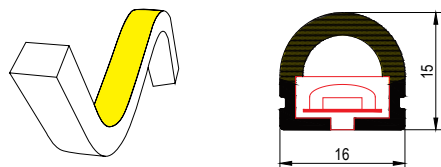


DNF VERT

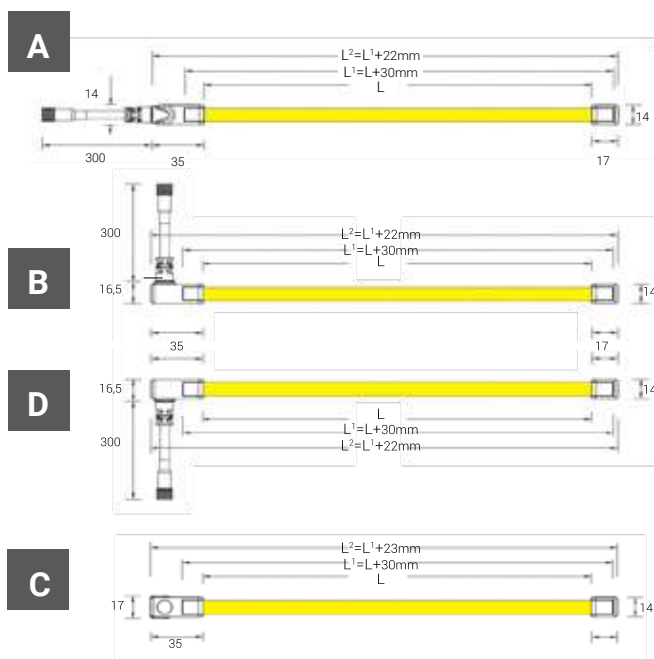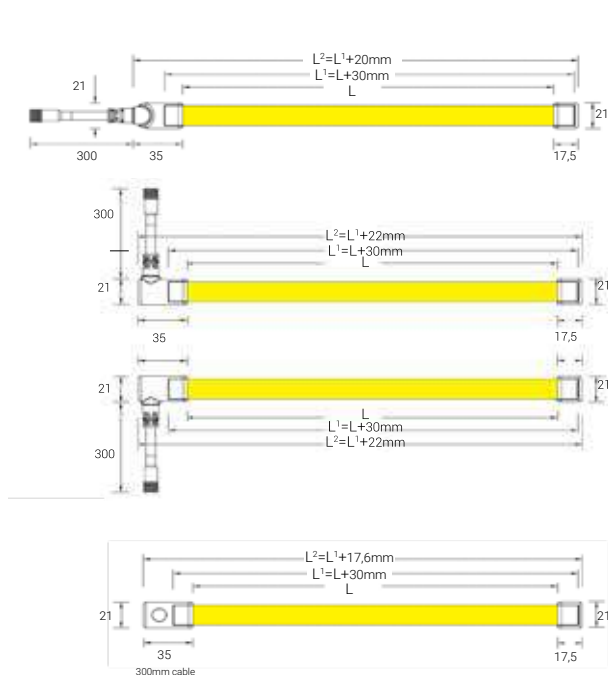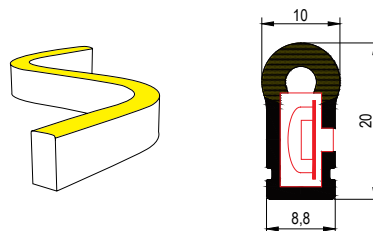


DATA

DNF TOP



DNF VERT



DuraNeonFlex

DURANEONFLEX VERT

DuraNeonFlex is a flexible extruded silicone profile, complete with 120 LEDs per meter strip.

The narrow pitch of the chips and Ic technology make DNF a perfect light line, homogenous on all its 10 meters of length.

TPOLOGY

DuraNeonFlex features a rounded section.

VERT flex Version: vertical emission away from the bottom of the channel.

FEATURES

Flexible light line with continuous lighting: so flexible you can create curves with a minimum diameter of 12 cm for VERT models.

Anti-glare diffuser function.

Maximum length per single power supply: 10 metres.

INSTALLATION

It is attached to the surface with the clips; it can be cut following the cutting marks (5cm).

DNF is equipped with different terminals for power supply: in-line, side and rear connection to the profile to meet any installation requirement.

MATERIAL

Extremely flexible, impact resistant and weatherproof extruded silicone.

USAGE INFORMATION

DuraNeonFlex are dimmable like all DURASTRIP.

PACKAGING

DNF can be supplied at any specific length (max length 10 meters for single power supply, cut every 5 cm) with or without the electrical terminals or in 10 m and 50 m reels without terminals.



CUSTOM PRODUCTIONS

See details at the beginning of Linear Systems

Cutting DuraNeonFlex to size*:

VA02





Fixed cost of piece work

* Respect the cutting pitch. Supplied with 30 cm cable.




DuraNeonFlex

DURANEONFLEX VERT

PLUS	24 Vdc	Ra >80		36000 h L70B20	IP65	IK07	-25°C +35°C	Risk Group 0			150°		
-------------	--------	--------	---	-------------------	------	------	----------------	-----------------	---	---	------	---	---









DURANEONFLEX VERT WHITE

W/m	lm/m	K	L	L1	H		ART.
9	380	2700	10000	8.8	20	1 / 1	09UV240927
9	400	3000	10000	8.8	20	1 / 1	09UV240930
9	400	3500	10000	8.8	20	1 / 1	09UV240935 ♦
9	420	4000	10000	8.8	20	1 / 1	09UV240940
9	440	6500	10000	8.8	20	1 / 1	09UV240965 ♦
14	425	2700	10000	8.8	20	1 / 1	09UV241427
14	450	3000	10000	8.8	20	1 / 1	09UV241430
14	460	3500	10000	8.8	20	1 / 1	09UV241435 ♦
14	630	4000	10000	8.8	20	1 / 1	09UV241440
14	600	6500	10000	8.8	20	1 / 1	09UV241465 ♦

♦ Only available with MOQ (5 Reels of 10 mt): contact sales department for more information.

PLUS	24 Vdc		36000 h L70B20	IP65	IK07	-25°C +35°C	Risk Group 0			150°		
-------------	--------	---	-------------------	------	------	----------------	-----------------	---	---	------	---	---

DURANEONFLEX VERT COLOR


	W	W/m	L	L1	H		ART.
	90	9	10000	8.8	20	1 / 1	09UV2409RD ♦
	90	9	10000	8.8	20	1 / 1	09UV2409VR ♦
	90	9	10000	8.8	20	1 / 1	09UV2409GL ♦
	90	9	10000	8.8	20	1 / 1	09UV2409OR ♦
	90	9	10000	8.8	20	1 / 1	09UV2409BL ♦
	90	9	10000	8.8	20	1 / 1	09UV2409AM ♦
	140	14	10000	8.8	20	1 / 1	09UV24RGB ●

● On request.

♦ Only available with MOQ (5 Reels of 10 mt): contact sales department for more information.

DNF VERT WIRING KIT



		ART.
DNF VERT wiring kit	1 / 1	KT09UVL1
DNF VERT RGB wiring kit	1 / 1	KT09UVRGBL1 ●

DNF VERT wiring kit including output line/straight exit wire + end cap + 30 cm long power cord for driver connection.

DNF Strips with end cap are IP40; if properly sealed with glue they provide IP65.

This wiring kit corresponds to the suffix **A** in the codes of finished end prepared product.


● On request.

Accessories

DURANEONFLEX VERT


DNF VERT LINEAR WIRING



		ART.
DNF VERT linear wiring	1 / 1	KT09UVJM1
DNF VERT RGB linear wiring	1 / 1	KT09UVRGBJM1 ●
DNF VERT linear wiring jumper 30 cm (3 pieces).		
● On request.		


DNF VERT WIRING KIT




		ART.
DNF VERT wiring kit	1 / 1	KT09UVL2
DNF VERT RGB wiring kit	1 / 1	KT09UVRGBL2 ●
DNF VERT wiring kit including output side/lateral exit wire + end cap. DNF Strips with end cap are IP40; if properly sealed with glue they provide IP65. This wiring kit corresponds to the suffix B in the codes of finished end prepared product.		
● On request.		


DNF VERT FLEX WIRING KIT



		ART.
DNF VERT wiring kit	1 / 1	KT09UVL3
DNF VERT RGB wiring kit	1 / 1	KT09UVRGBL3 ●
DNF VERT Flex wiring kit including rear/bottom exit wire + end cap + 30 cm long power cord for driver connection. DNF Strips with end cap are IP40; if properly sealed with glue they provide IP65. This wiring kit corresponds to the suffix C in the codes of finished end prepared product.		
● On request.		


DNF VERT RGB LINEAR WIRING



		ART.
DNF VERT RGB linear wiring	1 / 1	KT09UVRGBJM3 ●
DNF VERT RGB Flex rear wiring jumper 30 cm (3 pieces).		
● On request.		


DNF VERT FLEX TRANSPARENT 'OMEGA SHAPE' CLIPS KIT



		ART.
DNF VERT clips kit	1 / 1	KT09UVS1
DNF VERT Flex Transparent 'omega shape' clips kit. Includes 5 clips and 10 screws.		

DNF VERT FLEX CLIP KIT



		ART.
DNF VERT bottom fixing clips	1 / 1	KT09UVC1
DNF VERT Flex bottom fixing clips kit. Includes 5 clips and 5 screws.		

Accessories

DURANEONFLEX VERT

DNF VERT FLEX ALUMINUM CHANNEL



DNF VERT aluminum channel



1 / 1

ART.

KT09UVP1 ●

DNF VERT Flex 1 pcs of aluminum channel length 965 mm + 2 pcs of screws (terminals rest outside of the channel).

● On request.

FLEXIBLE PROFILE FOR DNF TOP AND DNF-Q TOP



Flexible profile L.20 m




1 / 1

ART.


KTUVFP2

Flexible metal profile for DNF VERT and DNF-Q VERT models.



KT09UVP1

KT09UVP2





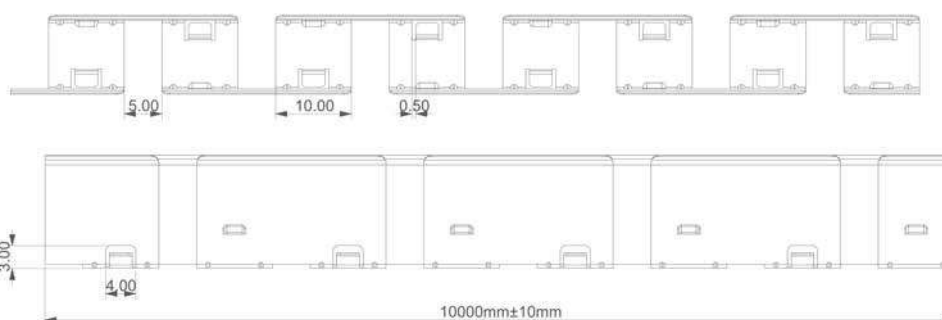









INSTALLATION AND ASSEMBLY DETAILS

DNF are extremely flexible strips but it is important not to force the curvature beyond the specified limits. Installations that do not comply with these instructions cannot be covered by warranty. Take care not to twist the product during installation.


DNF-Q / TOP




DNF-Q / VERT




Connector insertion details




Discovering welding points: First, identify the terminal part that will lead to the power feeder. Peel off the silicone above the bottom layer of PCB, to bare the solder pads. Please work with care, do not scratch or damage the PCB layout, otherwise the fixture will not work!




Insert power cable into the chosen terminal cap. Make sure the end cap is the correct power feeder method as required. Move and adjust the end cap to the right location for appropriate soldering process.



Make sure of the correct polarity, to avoid non-working for the luminary. Good soldering quality should be made in full and firm solder point without cold solder joint. Same process for the RGB colour luminary. Seal with silicone glue.




Apply the glue to the right parts around the terminal as the diagram. Push and fix the endcap onto the terminal, then get rid of residual glue. After 10 minutes the glue's surface can be cured and hard, after 24 hours the glue can be cured completely and achieve the strongest adhesive capacity. The strip should rest flat while the glue is being cured, do not pull or push the end cap. Same process for the end cap.




Mounting complete

TECH DRAWINGS

DNF -Q/ TOP

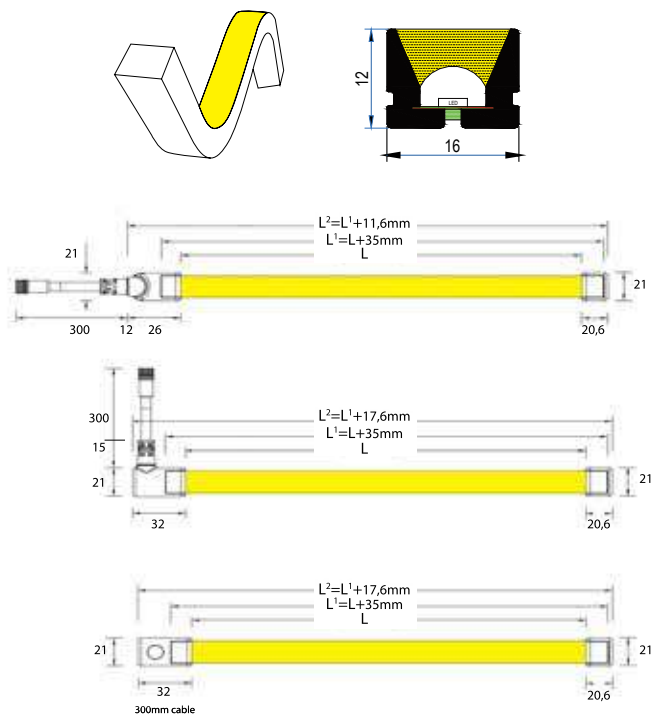


DNF-Q / VERT

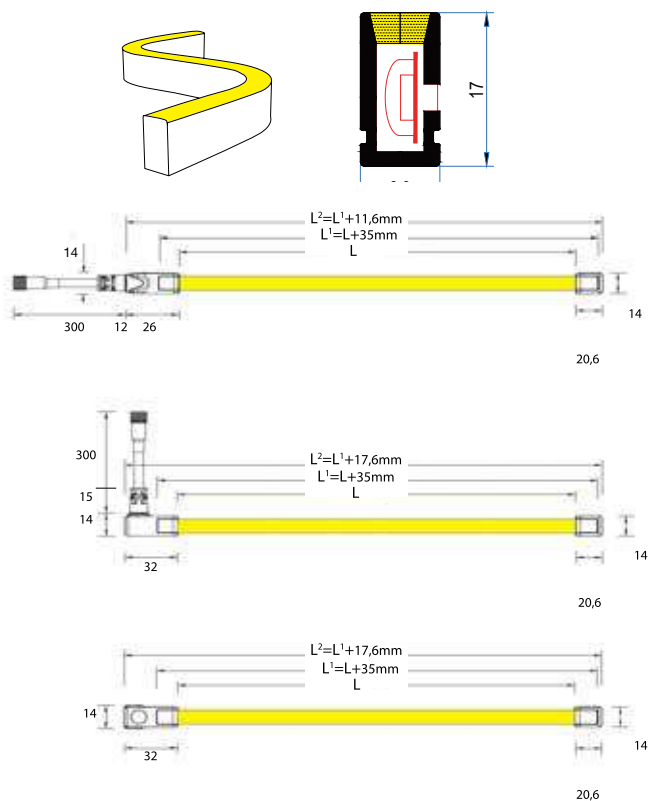

LIGHTING DATA

DNF-Q / TOP




Light output average:

art.	W/m	K	lm/m	K	lm/m	K	lm/m	K	lm/m
TOP FLEX	14	2700	600	3000/3500	630	4000	660	6500	655
TOP FLEX	9	2700	400	3000/3500	425	4000	450	6500	460

Average beam angle
(50%): 114.0°

DNF-Q / VERT



Light output average:

art.	W/m	K	lm/m	K	lm/m	K	lm/m	K	lm/m
VERT FLEX	14	2700	350	3000/3500	370	4000	350	6500	405
VERT FLEX	9	2700	250	3000/3500	265	4000	275	6500	230

Average beam angle (50%):
114.4°

DuraNeonFlex

DURANEONFLEX-Q TOP

DuraNeonFlex is a flexible extruded silicone profile, complete with 120 LEDs per meter strip.

The narrow pitch of the chips and Ic technology make DNF a perfect light line, homogenous on all its 10 meters of length.

TPOLOGY

DuraNeonFlex-Q has a square section.

TOP flex Version: the light is emitted on the upper side of the light channel.

FEATURES

Flexible light line with continuous lighting: so flexible you can create curves with a minimum diameter of 12 cm for VERT models.

Anti-glare diffuser function.

Maximum length per single power supply: 10 metres.

INSTALLATION

It is attached to the surface with the clips; it can be cut following the cutting marks (5cm).

DNF is equipped with different terminals for power supply: in-line, side and rear connection to the profile to meet any installation requirement.

MATERIAL

Extremely flexible, impact resistant and weatherproof extruded silicone.

USAGE INFORMATION

DuraNeonFlex are dimmable like all DURASTRIP.

PACKAGING

DNF can be supplied at any specific length (max length 10 meters for single power supply, cut every 5 cm) with or without the electrical terminals or in 10 m and 50 m reels without terminals.



CUSTOM PRODUCTIONS

See details at the beginning of Linear Systems

Cutting DuraNeonFlex to size*:

VA02






Fixed cost of piece work

* Respect the cutting pitch. Supplied with 30 cm cable.




DuraNeonFlex

DURANEONFLEX-Q TOP










PLUS	24 Vdc	Ra >80		36000 h L70B20	IP65	IK07	-25°C +35°C	Risk Group 0				
-------------	--------	--------	---	-------------------	------	------	----------------	-----------------	---	---	---	---

DURANEONFLEX-Q TOP WHITE

W/m	lm/m	K	L	L1	H		ART.
9	400	2700	10000	16	12	1 / 1	10UT240927
9	425	3000	10000	16	12	1 / 1	10UT240930
9	425	3500	10000	16	12	1 / 1	10UT240935 ♦
9	450	4000	10000	16	12	1 / 1	10UT240940
9	460	6500	10000	16	12	1 / 1	10UT240965 ♦
14	600	2700	10000	16	12	1 / 1	10UT241427
14	630	3000	10000	16	12	1 / 1	10UT241430
14	630	3500	10000	16	12	1 / 1	10UT241435 ♦
14	660	4000	10000	16	12	1 / 1	10UT241440
14	655	6500	10000	16	12	1 / 1	10UT241465 ♦

♦ Only available with MOQ (5 Reels of 10 mt): contact sales department for more information.

DURANEONFLEX-Q TOP COLOR

	W	W/m	L	L1	H		ART.
	90	9	10000	16	12	1 / 1	10UT2409RD ♦
	90	9	10000	16	12	1 / 1	10UT2409VR ♦
	90	9	10000	16	12	1 / 1	10UT2409GL ♦
	90	9	10000	16	12	1 / 1	10UT2409OR ♦
	90	9	10000	16	12	1 / 1	10UT2409BL ♦
	90	9	10000	16	12	1 / 1	10UT2409AM ♦
	140	14	10000	16	12	1 / 1	10UT24RGB ♦

♦ Only available with MOQ (5 Reels of 10 mt): contact sales department for more information.

DNF-Q TOP WIRING KIT



		ART.
DNF-Q TOP wiring kit	1 / 1	KT10UTL1
DNF-Q TOP RGB wiring kit	1 / 1	KT10UTRGBL1

DNF-Q TOP wiring kit including output line/straight exit wire + end cap + 30 cm long power cord for driver connection.

DNF Strips with end cap are IP40; if properly sealed with glue they provide IP65.

This wiring kit corresponds to the suffix **A** in the codes of finished end prepared product.

DNF-Q TOP WIRING JUMPER



		ART.
DNF-Q TOP wiring jumper	1 / 1	KT10UTJM1
DNF-Q TOP RGB wiring jumper	1 / 1	KT10UTRGBJM1

DNF-Q TOP linear wiring jumper 30 cm (3 pieces).

Accessories

DURANEONFLEX-Q TOP

DNF-Q TOP WIRING KIT



		ART.
DNF-Q TOP wiring kit	1 / 1	KT10UTL2
DNF-Q TOP RGB wiring kit	1 / 1	KT10UTRGBL2

DNF-Q TOP wiring kit includes output side/lateral exit wire + silicone end cap.
DNF Strips with end cap are IP40; if properly sealed with glue they provide IP65.
This wiring kit corresponds to the suffix **B** in the codes of finished end prepared product.


NOTE

DNF Q lateral terminal: the caps on DNF-Q terminals are silicone and can be positioned indifferently on both sides of the strip.

For on site assembly order code KT10UTL2 to use on both sides.

In the event of orders of goods to be supplied complete with terminals specify which side by adding code B or D depending on the request about the installation side of the terminal.

DNF-Q TOP WIRING JUMPER



		ART.
DNF-Q TOP wiring jumper	1 / 1	KT10UTJM2
DNF-Q TOP RGB wiring jumper	1 / 1	KT10UTRGBJM2

DNF-Q TOP lateral/side wiring jumper.


DNF-Q TOP WIRING KIT



		ART.
DNF-Q TOP wiring kit	1 / 1	KT10UTL3
DNF TOP RGB wiring kit	1 / 1	KT10UTRGBL3

DNF-Q TOP wiring kit including rear/bottom exit wire + end cap + 30 cm long power cord for driver connection.
DNF Strips with end cap are IP40; if properly sealed with glue they provide IP65.

DNF-Q TOP WIRING JUMPER



		ART.
DNF-Q TOP wiring jumper	1 / 1	KT10UTJM3
DNF-Q TOP RGB wiring jumper	1 / 1	KT10UTRGBJM3

DNF-Q TOP flex rear wiring jumper 30 cm (3 pieces).

DNF-Q TOP CLIPS KIT



		ART.
DNF-Q TOP clips kit	1 / 1	KT10UTS1

DNF-Q TOP Transparent 'omega shape' clips kit.
Includes 5 clips and 10 screws.



		ART.
DNF-Q TOP base fixing clip kit	1 / 1	KT10UTC1

DNF-Q TOP bottom fixing clips.
Includes 5 white clips and 5 screws.

Accessories

DURANEONFLEX-Q TOP

DNF-Q TOP ALUMINUM CHANNEL



DNF-Q TOP aluminum channel



1 / 1

ART.

KT10UTP1

DNF-Q TOP Flex 1 pcs of aluminum channel length 965 mm + 2 pcs of screws (terminals rest outside of the channel).

FLEXIBLE PROFILE FOR DNF TOP AND DNF-Q TOP



Flexible profile L.20 m




1 / 1

ART.



KTUTFP2

Flexible metal profile for DNF TOP and DNF-Q TOP models.



KT10UTP1

KTUTFP2

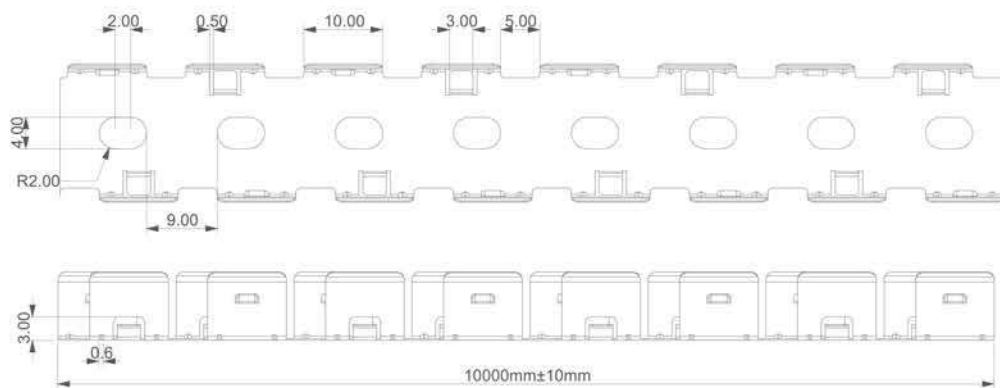

DuraNeonFlex

DURANEONFLEX-Q VERT

DuraNeonFlex is a flexible extruded silicone profile, complete with 120 LEDs per meter strip. The narrow pitch of the chips and Ic technology make DNF a perfect light line, homogenous on all its 10 meters of length.

TYOLOGY

DuraNeonFlex-Q has a square section.

VERT flex Version: vertical emission away from the bottom of the channel.

FEATURES

Flexible light line with continuous lighting: so flexible you can create curves with a minimum diameter of 12 cm for VERT models.

Anti-glare diffuser function.

Maximum length per single power supply: 10 metres.

INSTALLATION

It is attached to the surface with the clips; it can be cut following the cutting marks (5cm).

DNF is equipped with different terminals for power supply: in-line, side and rear connection to the profile to meet any installation requirement.

MATERIAL

Extremely flexible, impact resistant and weatherproof extruded silicone.

USAGE INFORMATION

DuraNeonFlex are dimmable like all DURASTRIP.

PACKAGING

DNF can be supplied at any specific length (max length 10 meters for single power supply, cut every 5 cm) with or without the electrical terminals or in 10 m and 50 m reels without terminals.



CUSTOM PRODUCTIONS

See details at the beginning of Linear Systems

Cutting DuraNeonFlex to size*:

VA02





Fixed cost of piece work

* Respect the cutting pitch. Supplied with 30 cm cable.




DuraNeonFlex

DURANEONFLEX-Q VERT










PLUS	24 Vdc	Ra >80		36000 h L70B20	IP65	IK07	-25°C +35°C	Risk Group 0				
-------------	--------	--------	---	-------------------	------	------	----------------	-----------------	---	---	---	---

DURANEONFLEX-Q VERT WHITE

W/m	lm/m	K	L	L1	H		ART.
9	250	2700	10000	8.8	17	1 / 1	10UV240927
9	265	3000	10000	8.8	17	1 / 1	10UV240930
9	265	3500	10000	8.8	17	1 / 1	10UV240935 ♦
9	275	4000	10000	8.8	17	1 / 1	10UV240940
9	230	6500	10000	8.8	17	1 / 1	10UV240965 ♦
14	350	2700	10000	8.8	17	1 / 1	10UV241427
14	370	3000	10000	8.8	17	1 / 1	10UV241430
14	370	3500	10000	8.8	17	1 / 1	10UV241435 ♦
14	350	4000	10000	8.8	17	1 / 1	10UV241440
14	405	6500	10000	8.8	17	1 / 1	10UV241465 ♦

♦ Only available with MOQ (5 Reels of 10 mt): contact sales department for more information.

DURANEONFLEX-Q -VERT COLOR

	W	W/m	L	L1	H		ART.
	90	9	10000	8.8	17	1 / 1	10UV2409RD ♦
	90	9	10000	8.8	17	1 / 1	10UV2409VR ♦
	90	9	10000	16	12	1 / 1	10UV2409GL ♦
	90	9	10000	16	12	1 / 1	10UV2409OR ♦
	90	9	10000	8.8	17	1 / 1	10UV2409BL ♦
	90	9	10000	8.8	17	1 / 1	10UV2409AM ♦
	140	14	10000	8.8	17	1 / 1	10UV24RGB ♦

♦ Only available with MOQ (5 Reels of 10 mt): contact sales department for more information.

DNF-Q VERT WIRING KIT



		ART.
DNF-Q VERT wiring kit	1 / 1	KT10UVL1
DNF-Q VERT RGB wiring kit	1 / 1	KT10UVRGBL1

DNF-Q VERT wiring kit including output line/straight exit wire + end cap + 30 cm long power cord for driver connection.

DNF Strips with end cap are IP40; if properly sealed with glue they provide IP65.

This wiring kit corresponds to the suffix **A** in the codes of finished end prepared product.

DNF-Q VERT LINEAR WIRING



		ART.
DNF-Q VERT wiring jumper	1 / 1	KT10UVJM1
DNF-Q VERT RGB wiring jumper	1 / 1	KT10UVRGBJM1


DNF-Q VERT linear wiring jumper 30 cm (3 pieces).

Accessories

DURANEONFLEX-Q VERT

DNF-Q VERT WIRING KIT



		ART.
DNF-Q VERT wiring kit	1 / 1	KT10UVL2
DNF-Q VERT RGB wiring kit	1 / 1	KT10UVRGBL2

DNF-Q VERT Wiring kit includes output side/lateral exit wire + end cap.
DNF Strips with end cap are IP40; if properly sealed with glue they provide IP65.
This wiring kit corresponds to the suffix **B** in the codes of finished end prepared product.


NOTE

DNF Q lateral terminal: the caps on DNF-Q terminals are silicone and can be positioned indifferently on both sides of the strip.

For on site assembly order code KT10UTL2 to use on both sides.

In the event of orders of goods to be supplied complete with terminals specify which side by adding code B or D depending on the request about the installation side of the terminal.


DNF-Q VERT LINEAR WIRING



		ART.
DNF-Q VERT wiring jumper	1 / 1	KT10UVJM2
DNF-Q VERT RGB wiring jumper	1 / 1	KT10UVRGBJM2

DNF-Q VERT lateral/side wiring jumper.

DNF-Q VERT FLEX WIRING KIT




		ART.
DNF-Q VERT wiring kit	1 / 1	KT10UVL3
DNF-Q VERT RGB wiring kit	1 / 1	KT10UVRGBL3

DNF-Q VERT Flex wiring kit including rear/bottom exit wire + end cap + 30 cm long power cord for driver connection.

DNF Strips with end cap are IP40; if properly sealed with glue they provide IP65.

This wiring kit corresponds to the suffix **C** in the codes of finished end prepared product.

DNF-Q VERT RGB LINEAR WIRING



		ART.
DNF-Q VERT wiring jumper	1 / 1	KT10UVJM3
DNF-Q VERT wiring jumper	1 / 1	KT10UVRGBJM3

DNF-Q VERT RGB Flex rear wiring jumper 30 cm (3 pieces).

DNF-Q VERT CLIP KIT



		ART.
DNF-Q VERT clips kit	1 / 1	KT10UVS1

DNF-Q VERT Transparent 'omega shape' clips kit.
Includes 5 clips and 10 screws.



		ART.
DNF-Q VERT base fixing clip kit	1 / 1	KT10UVC1

DNF-Q VERT bottom fixing clips.
Includes 5 white clips and 5 screws.

Accessories

DURANEONFLEX-Q VERT

DNF-Q VERT ALUMINUM CHANNEL



DNF-Q VERT aluminum channel



1 / 1

ART.

KT10UVP1

DNF-Q VERT Flex 1 pcs of aluminum channel length 965 mm + 2 pcs of screws (terminals rest outside of the channel).

FLEXIBLE PROFILE FOR DNF TOP AND DNF-Q TOP



Flexible profile L.20 m




1 / 1

ART.

KTUVFP2

Flexible metal profile for DNF VERT and DNF-Q VERT models.

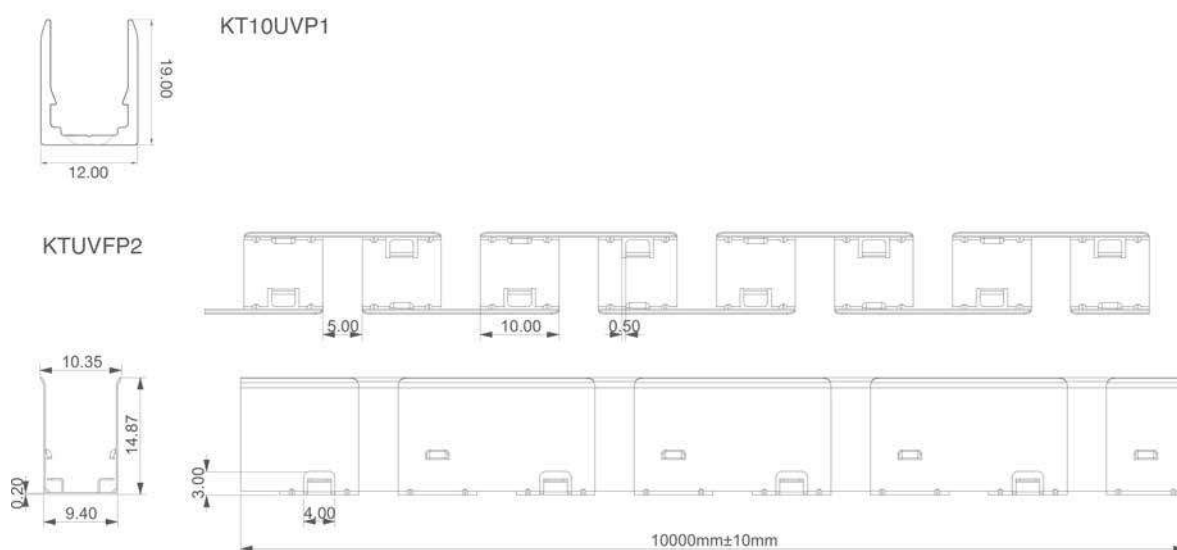



DuraNeonFlex

DURANEONFLEX TWIST

DuraNeonFlex Twist is the ideal tool to follow the fluid form of contemporary architecture and is able to follow curved paths that change direction in unexpected and surprising ways, DNF Twist can be twisted both vertically and horizontally and may be cut to size at any point making it possible to obtain the exact lengths necessary for any project.

FEATURES

Flexible light line with continuous lighting: so flexible you can create curves with a minimum diameter of 6 cm and allows twisting of 360° in one meter!

Lifetime: internal use >50,000h; external use>35,000h

Warranty: 3 years

IP65 with free wires

INSTALLATION

DNF is equipped with different terminals for power supply: in-line, side and rear connection to the profile to meet any installation requirement.

MATERIAL

Extremely flexible, impact resistant and weatherproof extruded silicone.

USAGE INFORMATION

Dimmable 0-100%

DALI - DMX

Analogue and digital domotic control systems

Push Dali with ZKCDAFF controllers

CASAMBI compatible

PACKAGING

Packaged in 5 meters reels.

DuraNeonFlex Twist can be ordered in custom lengths, with a max of 5 meters per electrical connection - with no minimum cut size - without or without the terminals needed for the project (in-line, side, or rear connection).



CUSTOM PRODUCTIONS

See details at the beginning of Linear Systems

Cutting DuraNeonFlex to size*:

VA02





Fixed cost of piece work

* Respect the cutting pitch. Supplied with 30 cm cable.

DuraNeonFlex

DURANEONFLEX TWIST


PLUS	24 Vdc	Ra >80		IP65	IK07	-25°C +35°C		120°		
-------------	--------	--------	---	------	------	----------------	---	------	---	---

W/m	lm/m	K	L	L1	H		ART.
9	400	2700	5000	16	15	1 / 1	12UM240927
9	425	3000	5000	16	15	1 / 1	12UM240930
9	425	3500	5000	16	15	1 / 1	12UM240935 ♦
9	450	4000	5000	16	15	1 / 1	12UM240940
9	450	6500	5000	16	15	1 / 1	12UM240965 ♦


♦ Only available with MOQ (5 Reels of 10 mt): contact sales department for more information.

DNF TOP TWIST WIRING KIT




		ART.
DNF TOP TWIST wiring kit	1 / 1	KT12UL1
DNF TOP TWIST wiring kit including output line/straight exit wire, free wires + end cap. DNF Strips with end cap are IP40; if properly sealed with glue they provide IP65. This wiring kit corresponds to the suffix A in the codes of finished end prepared product.		




		ART.
DNF TOP TWIST wiring kit	1 / 1	KT12UL2
DNF TOP TWIST wiring kit includes output side/lateral exit wire, free wires + end cap. DNF Strips with end cap are IP40; if properly sealed with glue they provide IP65. This wiring kit corresponds to the suffix B in the codes of finished end prepared product.		



		ART.
DNF TOP TWIST wiring kit	1 / 1	KT12UL3
DNF TOP TWIST wiring kit includes rear/bottom exit wire, free wires + end cap. DNF Strips with end cap are IP40; if properly sealed with glue they provide IP65. This wiring kit corresponds to the suffix C in the codes of finished end prepared product.		


DNF TOP TWIST CLIP KIT



		ART.
DNF TWIST clips kit	1 / 1	KT12UMS1
DNF TOP TWIST transparent 'omega shape' clips kit. Includes 5 clips and 10 screws.		

DNF TOP FLEX CLIPS KIT



		ART.
DNF TOP bottom fixing clips	1 / 1	KT09UTC1
DNF TOP Flex bottom fixing clips. Includes 5 clips and 5 screws.		

Accessories

DURANEONFLEX TWIST

DNF-Q TOP ALUMINUM CHANNEL



DNF-Q TOP aluminum channel



1 / 1



KT10UTP1

DNF-Q TOP Flex 1 pcs of aluminum channel length 965 mm + 2 pcs of screws (terminals rest outside of the channel).

DNF TWIST METAL PROFILE



Flexible profile L.20 m



1 / 1




KT12UMFP2


Flexible metal profile for DNF TWIST.

Tech Drawings


DNF TWIST + A (KT12UL1)

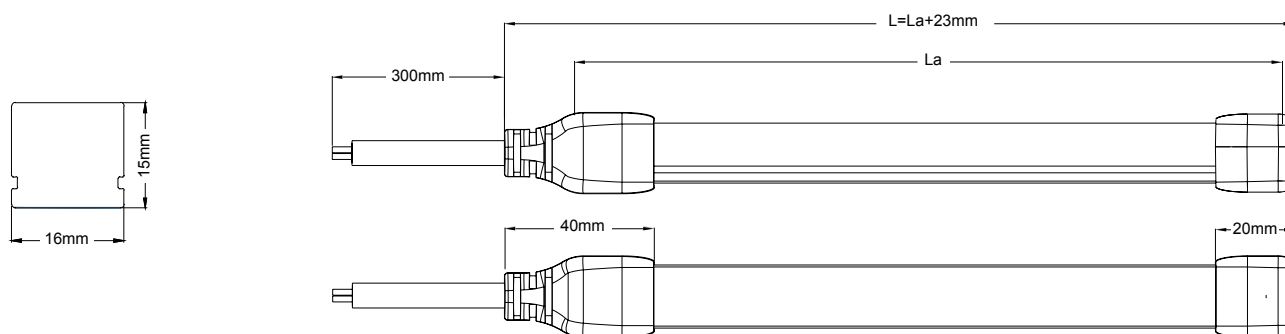

DNF TWIST + B (KT12UL2)

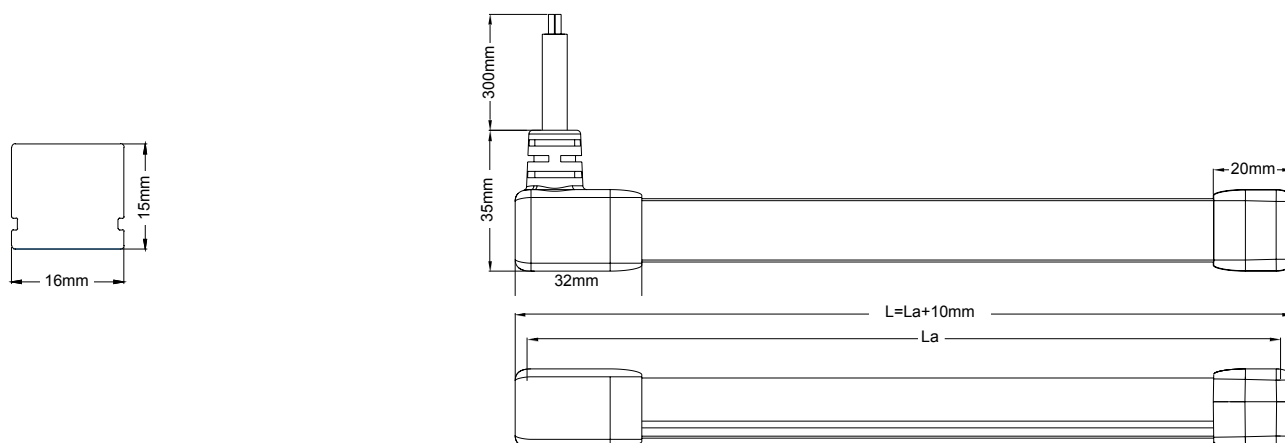


DNF TWIST + C (KT12UL3)

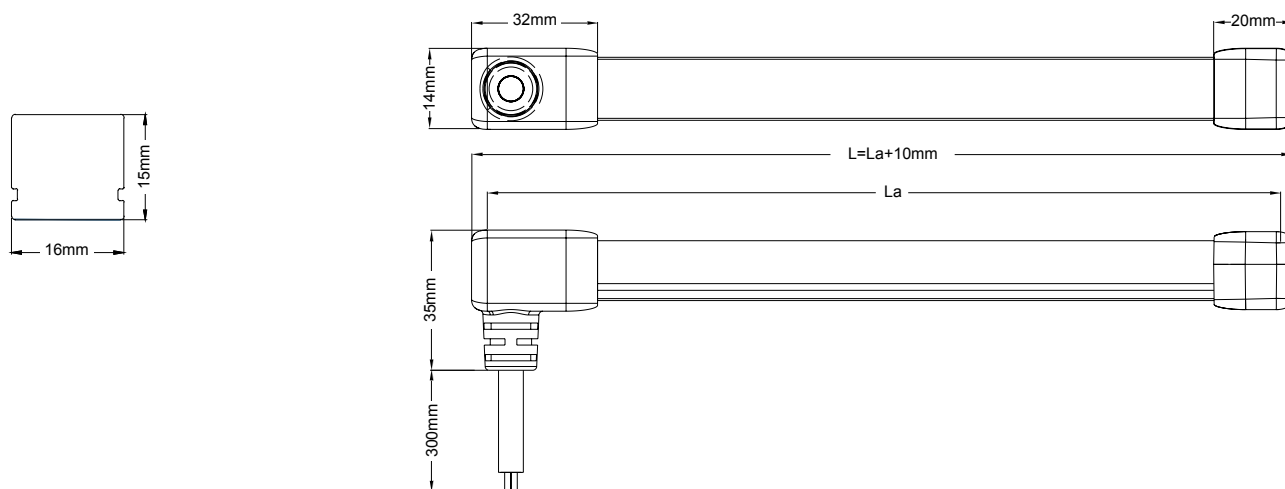

Data

DNF TWIST



Light output average:

art.	W/m	K	lm/m	K	lm/m	K	lm/m	K	lm/m
TWIST	9	2700	400	3000/3500	425	4000	450	6500	450

Average beam angle (50%): 118.4°



DuraNeonFlex

DURANEONFLEX MINI

A very slim line of light (8 mm) with no LED dotting, without cut limitations, flexible enough to be able to create 60 mm curves and available in 8 colours besides white light: DNF MINI is a small part of an amazing family!

Entirely extruded in high transmittance silicone, weather proof and impact resistant, it is suitable for creating particularly detailed and attractive light patterns, even in a single connection of 10 meters. The closing terminals are in a translucent silicone allowing the light to pass through to be the same colour as the strip.

TPOLOGY

Flexible light lines in extruded silicone, 8 mm thick with uniform and balanced VERT light emission and no LED dotting.

FEATURES

Flexible light line with a continuous lighting effect: so flexible you can create curves with a minimum diameter of 3 cm and allows twisting of 360° in 30 cm!

24VDC

Ra>80

Lifetime: internal use >50,000h; external use>35,000h

Warranty: 3 years

INSTALLATION

Surface mounted with clips; can be cut at any point (free cut). Fitted with different outputs for power supply.

MATERIAL

Extremely flexible, impact resistant and weatherproof extruded silicone.

USAGE INFORMATION

Dimmable 0-100%

DALI - DMX

Analogue and digital domotic control systems

Push Dali with ZKCDAFF controllers

CASAMBI compatible

PACKAGING

Packaged in 10 meters reels.

DNF MINI can be ordered in custom lengths, with a max of 5 meters per electrical connection - with no minimum cut size - without or without the terminals needed for the project (in-line, side, or rear connection).



CUSTOM PRODUCTIONS

See details at the beginning of Linear Systems

Cutting DuraNeonFlex to size*:

VA02

Fixed cost of piece work

* Respect the cutting pitch. Supplied with 30 cm cable.



DuraNeonFlex

DURANEONFLEX MINI



DNF MINI

New

	W/m	lm/m	K	L	L1	H		ART.
	9	218	2700	10000	7	15	1 / 1	11UV240927
	9	230	3000	10000	7	15	1 / 1	11UV240930
	9	230	3500	10000	7	15	1 / 1	11UV240935 ♦
	9	250	4000	10000	7	15	1 / 1	11UV240940
	9	250	6500	10000	7	15	1 / 1	11UV240965 ♦
	9			10000	7	15	1 / 1	11UV2409RD ♦
	9			10000	7	15	1 / 1	11UV2409VR ♦
	9			10000	7	15	1 / 1	11UV2409GL ♦
	9			10000	7	15	1 / 1	11UV2409OR ♦
	9			10000	7	15	1 / 1	11UV2409BL ♦
	9			10000	7	15	1 / 1	11UV2409CY ♦
	9			10000	7	15	1 / 1	11UV2409PU ♦

♦ Only available with MOQ (5 Reels of 10 mt): contact sales department for more information.

DNF MINI WIRING KIT



			ART.
	DNF MINI wiring kit	1 / 1	KT11UVL1
	DNF MINI wiring kit	1 / 1	KT11UVBLL1 ●
	DNF MINI wiring kit	1 / 1	KT11UVCYL1 ●
	DNF MINI wiring kit	1 / 1	KT11UVGLL1 ●
	DNF MINI wiring kit	1 / 1	KT11UVORL1 ●
	DNF MINI wiring kit	1 / 1	KT11UVPUL1 ●
	DNF MINI wiring kit	1 / 1	KT11UVRDL1 ●
	DNF MINI wiring kit	1 / 1	KT11UVVRL1 ●

DNF MINI Wiring kit including output line/straight exit wire, free wires + silicone end cap.
DNF Strips with end cap are IP40; if properly sealed with glue they provide IP65.
This wiring kit corresponds to the suffix **A** in the codes of finished end prepared product.

● On request.



			ART.
	DNF MINI wiring kit	1 / 1	KT11UVL2
	DNF MINI wiring kit	1 / 1	KT11UVBLL2 ●
	DNF MINI wiring kit	1 / 1	KT11UVCYL2 ●
	DNF MINI wiring kit	1 / 1	KT11UVGLL2 ●
	DNF MINI wiring kit	1 / 1	KT11UVORL2 ●
	DNF MINI wiring kit	1 / 1	KT11UVPUL2 ●
	DNF MINI wiring kit	1 / 1	KT11UVRDL2 ●
	DNF MINI wiring kit	1 / 1	KT11UVVRL2 ●

DNF MINI Wiring kit includes output side/lateral exit wire, free wires + silicone end cap.
DNF Strips with end cap are IP40; if properly sealed with glue they provide IP65.
This wiring kit corresponds to the suffix **B** in the codes of finished end prepared product.

● On request.

Accessories

DURANEONFLEX MINI

DNF MINI WIRING KIT



	DNF MINI wiring kit	1 / 1	KT11UVL3
	DNF MINI wiring kit	1 / 1	KT11UVBLL3 ●
	DNF MINI wiring kit	1 / 1	KT11UVCYL3 ●
	DNF MINI wiring kit	1 / 1	KT11UVGLL3 ●
	DNF MINI wiring kit	1 / 1	KT11UVORL3 ●
	DNF MINI wiring kit	1 / 1	KT11UVPUL3 ●
	DNF MINI wiring kit	1 / 1	KT11UVRDL3 ●
	DNF MINI wiring kit	1 / 1	KT11UVVRL3 ●

DNF MINI Wiring kit includes rear/bottom exit wire, free wires + end cap.

DNF Strips with end cap are IP40; if properly sealed with glue they provide IP65.

This wiring kit corresponds to the suffix **C** in the codes of finished end prepared product.

● On request.

DNF MINI CLIP KIT




DNF MINI base fixing clip kit	1 / 1	KT11UVC1
-------------------------------	-------	-----------------


DNF MINI Bottom fixing clips.
Includes 5 clips and 5 screws.

TECH DRAWINGS


DNF MINI + A (KT11UVL1)

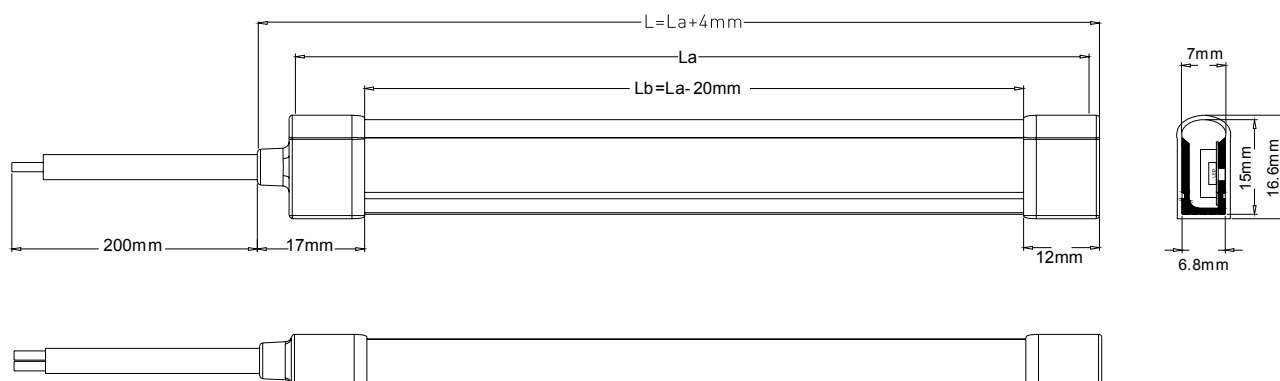

DNF MINI + B (KT11UVL2)

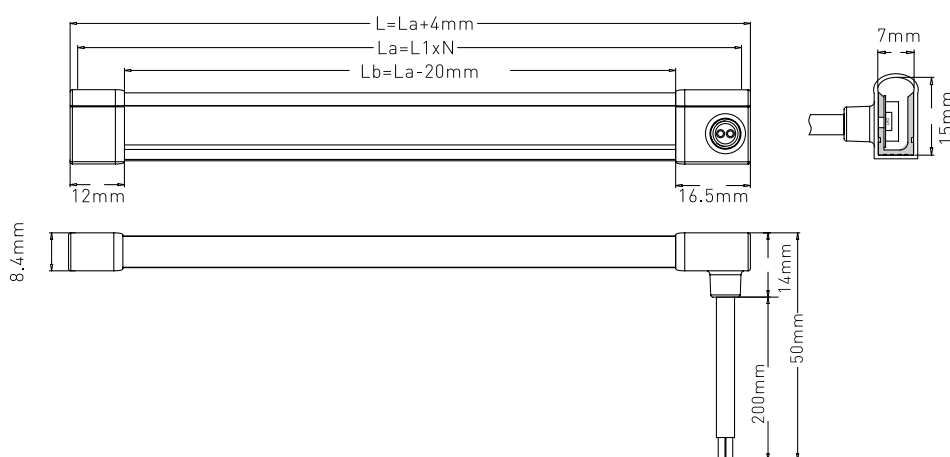

DNF MINI + C (KT11UVL3)

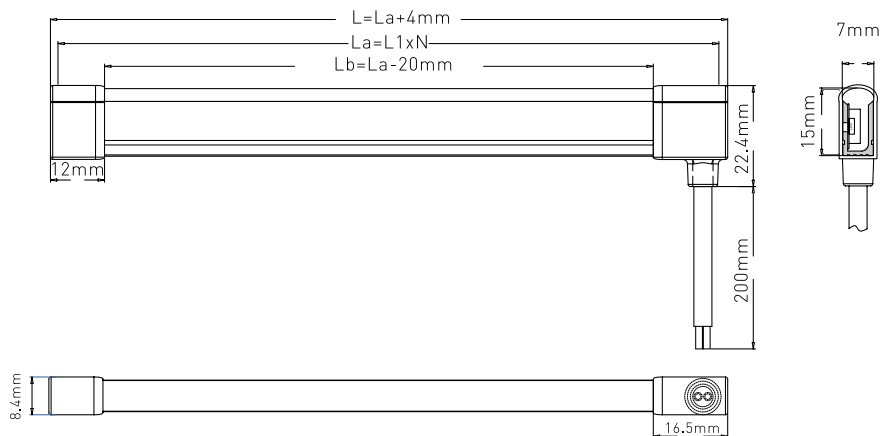



DURASTRIP HIGH VOLT

DURASTRIP HiVOLT for direct mains connection provides the advantage of being able to reach a length of 50 metres with power directly from mains electrical supply whilst offering lighting uniformity and colour along the entire length of the strip. Without the inconvenience of a remote LED driver, the strips can be used in surface mounted installations. With a shuko plug the product is IP44 but supplied already cut to the required length with a free wire arrangement, it is possible to achieve an IP65 protection provided the cables are terminated into a suitably rated enclosure making DURASTRIP HiVolt easy to maintain and resist the most common aggressive environments.

**Supplied already cut at
Requested measures**



IP44

with plug

**Single feed maximum length:
50 metres**



IP65

free wires





DURASTRIP HiVolt
120V
CCT+DIM-TO-WARM

DURASTRIP HiVolt
230V

DURASTRIP HiVolt
230V - 120V
TRIAC DIMM



Dedicated to 120V: variable colour temperature from 2700K to 6500K, all white shades possible to vary the atmosphere and environment. Version from 1800K to 3000K: Dim to Warm for warm and welcoming atmospheres.



Thick extruded silicone profile, extremely sturdy.



Latest generation extruded anti-yellowing PVC also for outdoor use, with white base and small closures, similar to strips.

MAXIMUN LENGTH - 50 mètres

PITCH CUT - 20 cm

COLOURS OF LIGHT

1800-3000K

2700-6500K

DIMMABILITY

Dimmable TRIAC leading edge

IP40

IP65

COLOURS OF LIGHT

2700K - 3000K - 4000K

DIMMABILITY

Dimmable with DMX dimmer code ZKCDMX-HV.

IP44

IP65

COLOURS OF LIGHT

2700K - 3000K - 4000K

DIMMABILITY

Dimmable TRIAC leading edge

IP40

IP44

IP65



CONFIGURATION OF THE "CUSTOM MADE" PRODUCT

Here are the necessary specifications to define the "custom made" HIVOLT DURASTRIP, complete with cable and plug or with free wires.

The following elements must be defined:



1

Existing product code



2

Length of strip segment


The requested length must take into account the cutting spacing of 20 cm, max 50m single feed.

(ALWAYS CONSIDER THE 20 CM CUTTING SPACE)


If a strip complete with a plug is requested, consider the size of the accessories: see the technical drawing to be sure

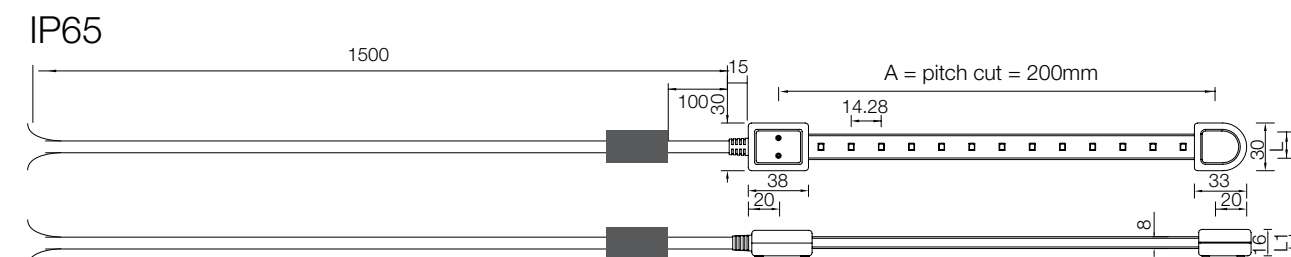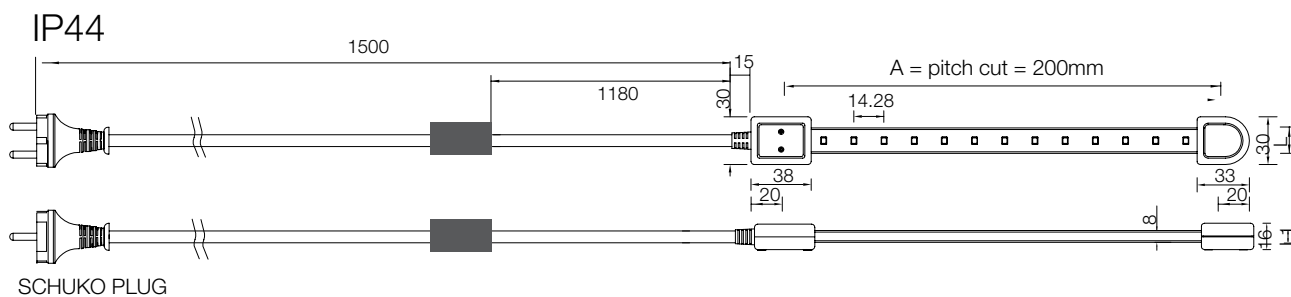

FREE WIRES

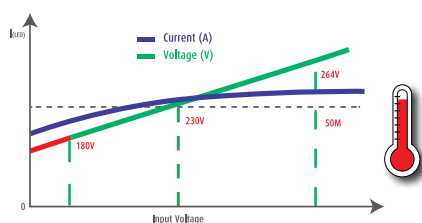

**EASY MOUNTING:
IT CAN BE FIXED WITH
FIXING BRIDGES.**



ENCODING SYSTEM FOR PROJECT PLANNING



art.
07U27HVE12-d

DURASTRIP HiVolt 2700K
12W/m DIMM

Strip length (cm)
1560

Strip length
(excluding cables) 15,60m



Order code:
07U27HVE12-D1560



For processes with IP40 terminals with SHUKO plug,
add **IN** to the code

For processes with terminals IP44 WITH Shuko PLUG
add **EX** to the code

For processes with free-wires terminals IP65 WITHOUT PLUG:
please specify when ordering.



Order code:
07U27HVE12-DIN1560

Please consider the additional cut and component fixed
fee as well as the cost of the single piece.

Cutting DURASTRIP HIVOlt to size*:

fixed cost of piece work

* Please consider pitch cut. Includes a 1.5 m cable.

VA00

DURASTRIP HiVolt

DURASTRIP HIVOLT

DURASTRIP HiVolt differs from similar products due to its extreme sturdiness: the protective sheath is reinforced by a double extrusion layer which provides a solid and highly resistant compacted quality. DURASTRIP HiVOLT for direct mains connection provides the advantage of being able to reach a length of 50 metres with power directly from mains electrical supply whilst offering lighting uniformity and colour along the entire length of the strip. Supplied already cut and wired to the required size. Equipped with a Shuko plug for direct connection to the network, it has an IP44 degree of protection that makes it easy to maintain and resistant to the most common wearing agents.

INSTALLATION

We recommend to order the assembly clips considering to use 4 clips for every metre. Any particular requests will be specified in the project form.

USAGE INFORMATION

Dimmable with DMX dimmer code ZKCDMX-HV.

ACCESSORIES

Fixing bridges.

PACKAGING

Supplied already cut to measures.

LED

LED 2835

70 LED/m

Ra>80

Lifetime: internal use >50,000h; external use>35,000h

Warranty: 3 years

COLOUR OF THE LIGHT

Choice of white colour temperatures.

BINNING

ANSI/SDCM: 3 step 1 bin.

CONNECTIONS

Up to 50 metres with a single power supply.

HiVolt IP65 strips are supplied ready to be installed complete with a cable of 1.50 m (black) equipped with a Schuko plug (full collar Schuko IP44) or supplied with free wires (IP65).

In addition to the value of the goods ordered consider the cost of cutting and installing components for every single piece (1.5 m cable, fuse, Schuko plug and cut).



CUSTOM PRODUCTIONS

See details at the beginning of Linear Systems

Cutting DuraStrip HiVolt to size*:

Fixed cost of piece work





* Respect the cutting pitch. Supplied with 150 cm cable.




VA00

DURASTRIP HiVolt

DURASTRIP HIVOlt

PRO	220-240 Vac	Ra >80		35000 h L70B20	IP40/65	-25°C +35°C	Risk Group 0		 110°	
------------	-------------	--------	---	----------------	---------	----------------	--------------	---	--	---

W/m	lm/m	K	LED/m	L	L1	H		ART.
12	1150	2700	70	1000	16	8	1 / 1	07U27HVE12
12	1200	3000	70	1000	16	8	1 / 1	07U30HVE12
12	1280	4000	70	1000	16	8	1 / 1	07U40HVE12

FIXING BRIDGES SET



Fixing bridges kit for HiVOLT

Set mounting clip for HiV strip (10 pcs).



1 / 1

ART.

KTHVCL

DIMMER DMX FOR DURASTRIP HIVOlt



Dimmer DMX for
DURASTRIP HiVOLT

Volt
IN

220-240 Vac

L

170

L1

59

H

29




1 / 1

ART.

ZKCDMX-HV

Can be used with ZKTPC; 300 W/CH, 3 CH.

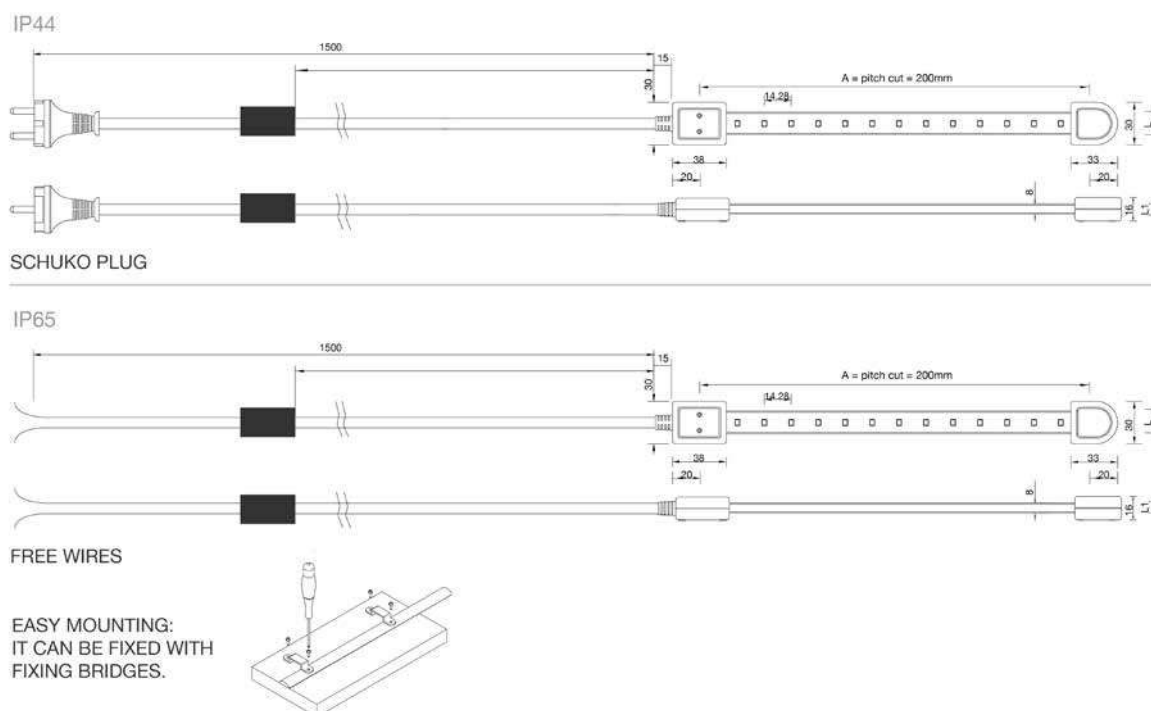

DURASTRIP HiVolt

DURASTRIP HIVOLT ARCH DIMMABLE

Dimmable version supplied with TRIAC soft dimming achieved with the built in control Chip.

Strip protected from over voltage & and overheating failure in each 20.3 cm strip segment.

Fitted with latest generation weatherproof and UV resistant Extruded PVC body for exterior use. Finished with white base and sides along with a transparent upper screen for a clean light emission.

System features miniature electrical connections and a closing end cap similar to the main strip.

Supplied already cut and wired in the requested measurement, may be provided with IP40 or IP65 rating depending on the installation environment.

INSTALLATION

We recommend to order the assembly clips considering to use 4 clips for every metre.

Any particular requests will be specified in the project form.

USAGE INFORMATION

230V: Dimmable TRIAC leading edge 10-100%

120V: Dimmable ELV 10-100%

Refer to the Duralamp site for details on compatible dimmers

ACCESSORIES

PC clip for anchoring.

PACKAGING

Packaged in 5 meters reels.

LED

LED 2835

70 LED/m

230V - 120V

Ra>90

Lifetime: internal use >50,000h; external use>35,000h

Warranty: 3 years

COLOUR OF THE LIGHT

Choice of white colour temperatures.

BINNING

ANSI/SDCM: 3 step 1 bin.

CONNECTIONS

Up to 50 metres with a single power supply.

HiVolt IP65 strips are supplied ready to be installed complete with a cable of 1.50 m (black) equipped with a Schuko plug (full collar Schuko IP44) or supplied with free wires (IP65).

In addition to the value of the goods ordered consider the cost of cutting and installing components for every single piece (1.5 m cable, fuse, Schuko plug and cut).



CUSTOM PRODUCTIONS

See details at the beginning of Linear Systems

Cutting DuraStrip HiVolt to size*:

Fixed cost of piece work






* Respect the cutting pitch. Supplied with 150 cm cable.




VA00






DURASTRIP HiVolt

DURASTRIP HIVOLT ARCH DIMMABLE


PRO	120 Vac	Ra >90		35000 h L70B20	IP40/65	-25°C +35°C	Risk Group 0		 110°		
------------	---------	--------	---	-------------------	---------	----------------	-----------------	--	--	---	---

DURASTRIP HIVOLT ARCH DIMMABLE - 230V

W/m	lm/m	K	LED/ m	L	L1	H		ART.
12	860	2700	80	1000	16.5	7	1 / 1	07U27HVE12-D
12	910	3000	80	1000	16.5	7	1 / 1	07U30HVE12-D
12	910	3500	80	1000	16.5	7	1 / 1	07U35HVE12-D
12	960	4000	80	1000	16.5	7	1 / 1	07U40HVE12-D
12	960	6000	80	1000	16.5	7	1 / 1	07U60HVE12-D

PRO	120 Vac	Ra >90		35000 h L70B20	IP40/65	-25°C +35°C	Risk Group 0		 110°		
------------	---------	--------	---	-------------------	---------	----------------	-----------------	--	--	---	---


DURASTRIP HIVOLT ARCH DIMMABLE - 120V

W/m	lm/m	K	LED/ m	L	L1	H		ART.
12	1000	2700	80	1000	16.5	7	1 / 1	07U27HVU12-D ●
12	1050	3000	80	1000	16.5	7	1 / 1	07U30HVU12-D ●
12	1050	3500	80	1000	16.5	7	1 / 1	07U35HVU12-D ●
12	1150	4000	80	1000	16.5	7	1 / 1	07U40HVU12-D ●
12	1150	6000	80	1000	16.5	7	1 / 1	07U60HVU12-D ●


● On request.




DURASTRIP HIVOLT ARCH DIMMABLE - 230V - IP40 TERMINAL "IN" WITH SCHUKO PLUG OR FREE WIRES

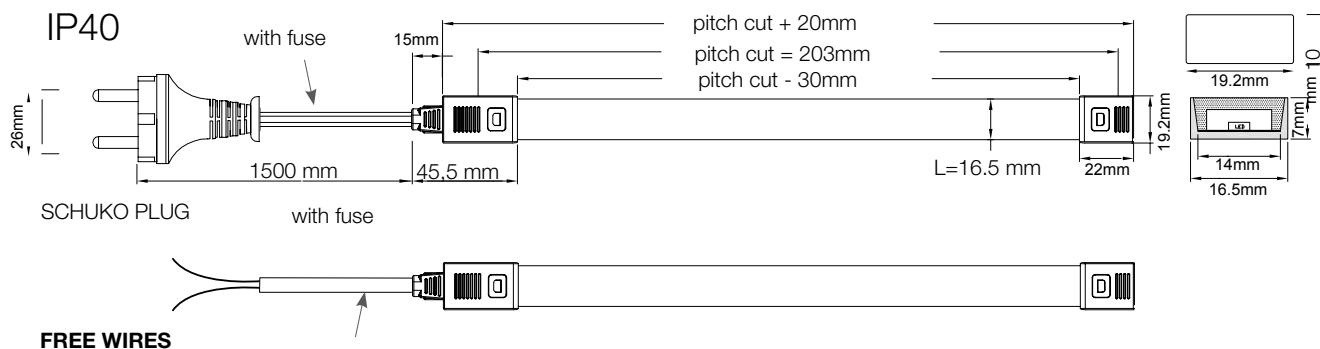

DURASTRIP HIVOLT ARCH DIMMABLE - 230V - IP65 TERMINAL "EX" WITH SCHUKO PLUG OR FREE WIRES

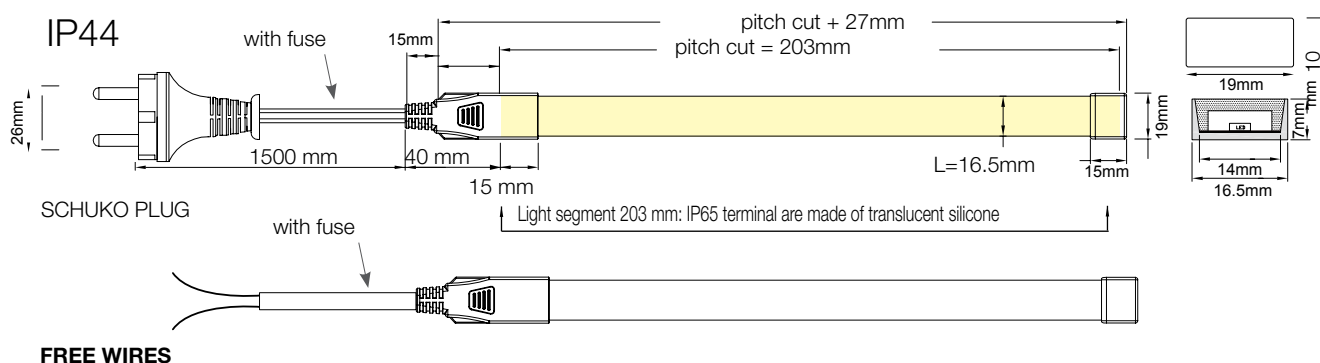


DURASTRIP HIVOLT ARCH DIMMABLE - 120V - IP40 TERMINAL "IN" WITH PLUG OR FREE WIRES

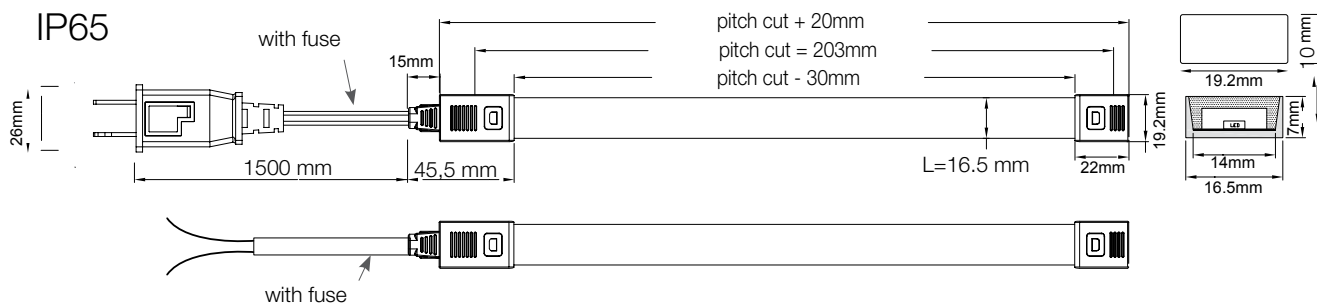

FREE WIRES

DURASTRIP HIVOLT ARCH DIMMABLE - 120V - IP65 TERMINAL "EX" WITH PLUG OR FREE WIRES

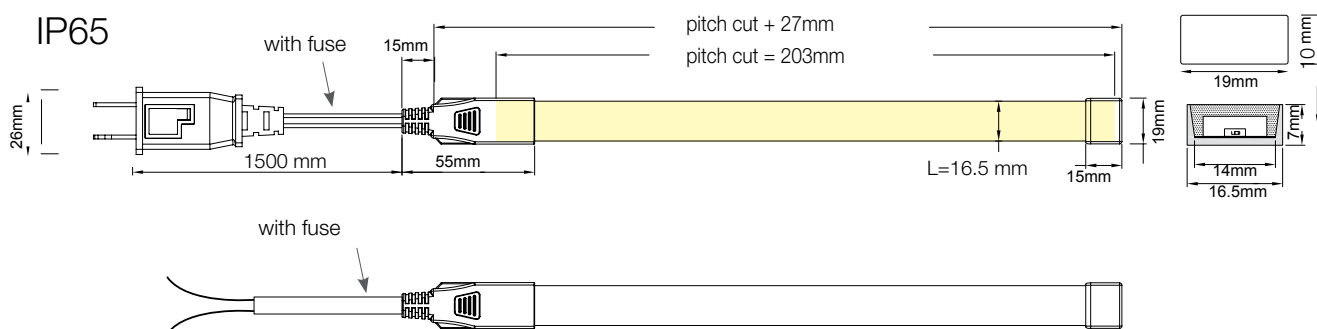

FREE WIRES



DURASTRIP HiVolt

DURASTRIP HIVOLT CCT + DIM TO WARM

Mains voltage strips, 120V with possibility of varying the colour temperature.
2700K to 6500K version to be able to take advantage of all of the potential white shades and vary the atmosphere of the areas.
Version from 1800K to 3000K for warm, welcoming and relaxing atmospheres: this strip warms up the colour of the light, lowering the colour temperature.

INSTALLATION

We recommend to order the assembly clips considering to use 4 clips for every metre.
Any particular requests will be specified in the project form.

USAGE INFORMATION

Dimmable ELV

ACCESSORIES

Mounting clips.

PACKAGING

Packaged in 5 meters reels.

LED

LED 2835
120 LED/m
120V

Ra>90
Lifetime: internal use >50,000h; external use>35,000h
Warranty: 3 years

COLOUR OF THE LIGHT

CCT: 2700K --> 6500K
DIM TO WARM: 1800K --> 3000K

BINNING

ANSI/SDCM: 3 step 1 bin.

CONNECTIONS

Up to 50 metres with a single power supply.
HiVolt IP65 strips are supplied ready to be installed complete with a cable of 1.50 m (black) equipped with a Schuko plug (full collar Schuko IP44) or supplied with free wires.
Strips can be supplied also with IP40 wiring.
In addition to the value of the goods ordered consider the cost of cutting and installing components for every single piece (1.5 m cable, fuse, Schuko plug if required and cut).



CUSTOM PRODUCTIONS

See details at the beginning of Linear Systems

Cutting Durastrip HiVolt to size*:

Fixed cost of piece work






* Respect the cutting pitch. Supplied with 150 cm cable.




VA00

DURASTRIP HiVolt

DURASTRIP HIVOLT CCT + DIM TO WARM


PRO	120 Vac	Ra >90		35000 h L70B20	IP40/65	-25°C +35°C	Risk Group 0		 110°		
------------	---------	--------	---	-------------------	---------	----------------	-----------------	---	--	---	---

DURASTRIP HIVOLT CCT - 120V

	W/m	max lm/m	K	LED/ m	L	L1	H		ART.
New	12	1050 (5000K)	2700-5000	120	1000	16.5	7	1 / 1	07UHVU2750K ●

● On request.


DURASTRIP HIVOLT DIM TO WARM - 120V

	W/m	max lm/m	K	LED/ m	L	L1	H		ART.
	12	950 (3000K)	1800-3000	120	1000	16.5	7	1 / 1	07UHVU1830K ●

● On request.

SPRING CLIPS



		ART.
Accessory for dimmable HiVolt	1 / 1	KTHV1-CL
Spring clips for dimmable HiVolt - 10 pcs.		

Strip **PROFILES**

**Surface
profiles**

**Recessed
profiles**

**Corner
profiles**


**Suspension
profiles**

Cutting Project profiles to size*:

fixed cost of piece work

VA04

* Includes mounting accessories.

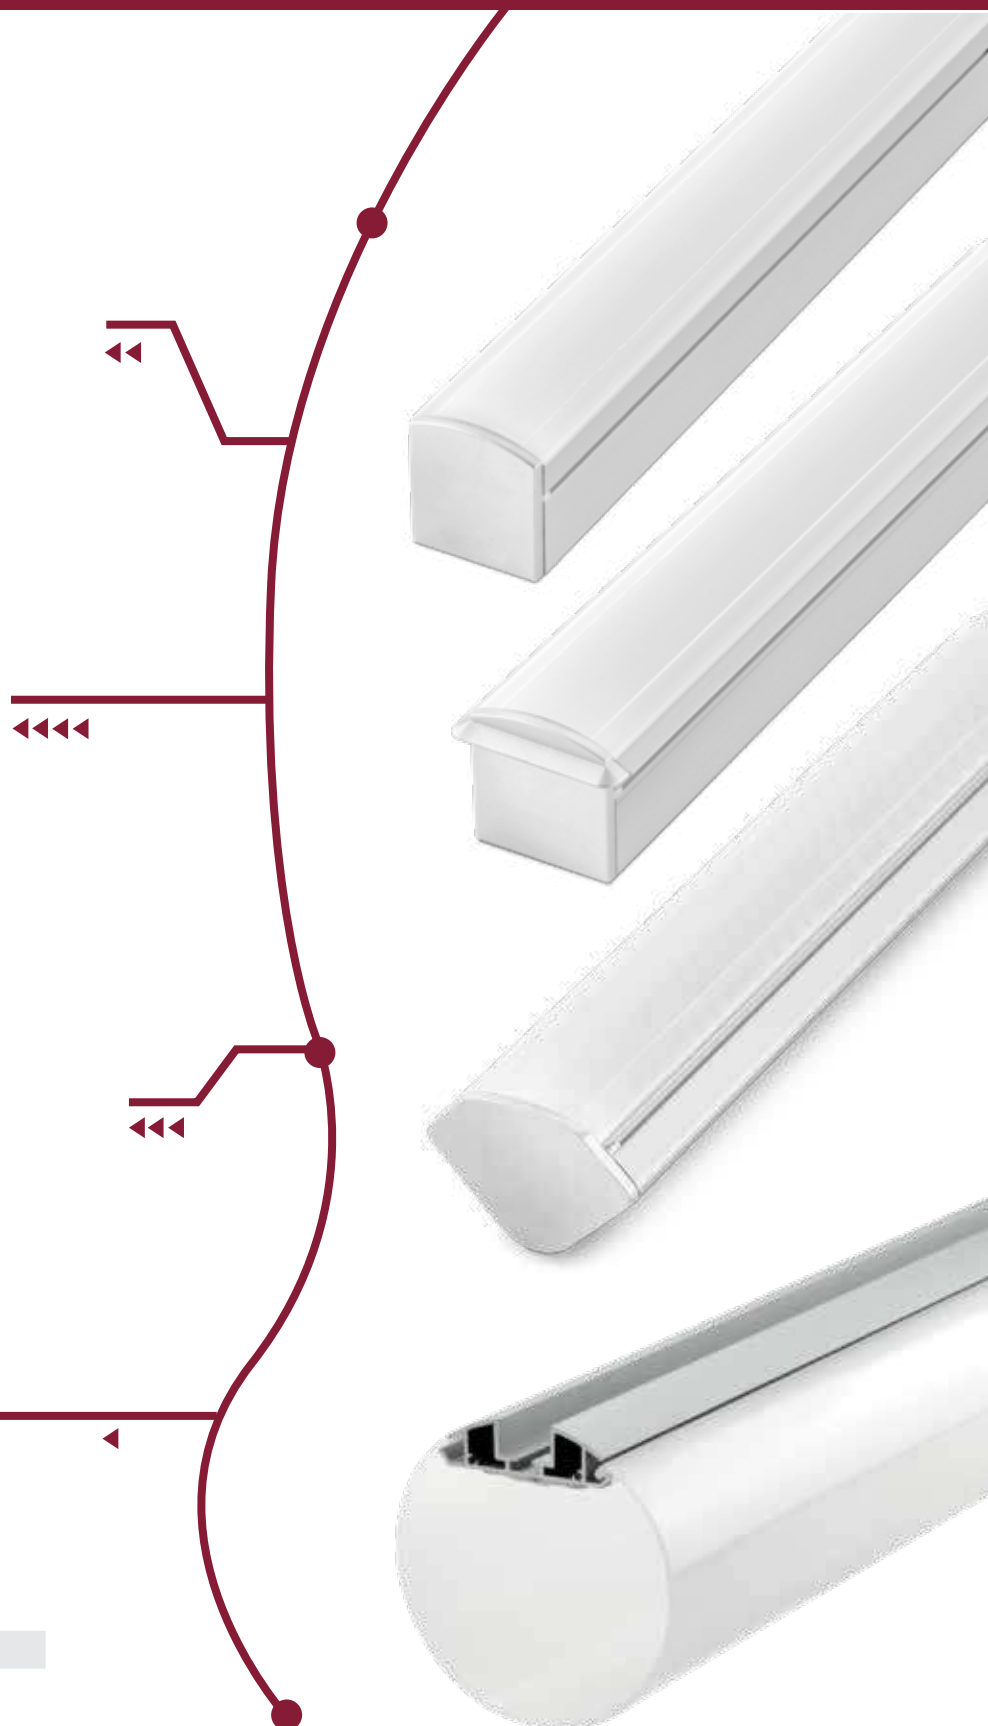

Strip **PROFILES**

Alluminum Profiles

ALUMINIUM 6063 = Aluminium-Magnesium-Silicon alloy ideal for even complex profile extrusion given its exceptional mechanical characteristics.

The excellent degree of finish is coupled with high resistance to atmospheric corrosion and good resistance to marine corrosion.

Density: 2.70 kg/dm³

Melting temperature: 600 °C

Thermal conductivity at 20 °C: 1,72W/cm°K

Absence of longitudinal torsion on the profile
Perfect mechanical quality on the length



Screens

PC= White polycarbonate. Used to cover all profiles that do not need to have any particular resistance to crushing.

Consider a reduction on light emission of the strip of 10%.



Accessories

Usually the end caps are supplied in pairs, one with a hole to allow the cable to pass through and one with a closed end. Unless otherwise indicated. In every pack there are a pair of end caps for every metre of profile: a 2 m profile will have 2 sets of end caps and 2 sets of clips (if they are part of the product); a 3 m profile will have 3 sets of end caps and 3 sets of accessories.

Cutting profiles to size*:

fixed cost of piece work

VA04

* Includes mounting accessories.






Profiles and LED strips

When choosing the profile and the strip that will be housed in it, consider whether the internal width and shape of the profile allow for the insertion of the strip including the terminals.

When using IP65/68 strips, the terminals will therefore remain outside the narrower profiles.

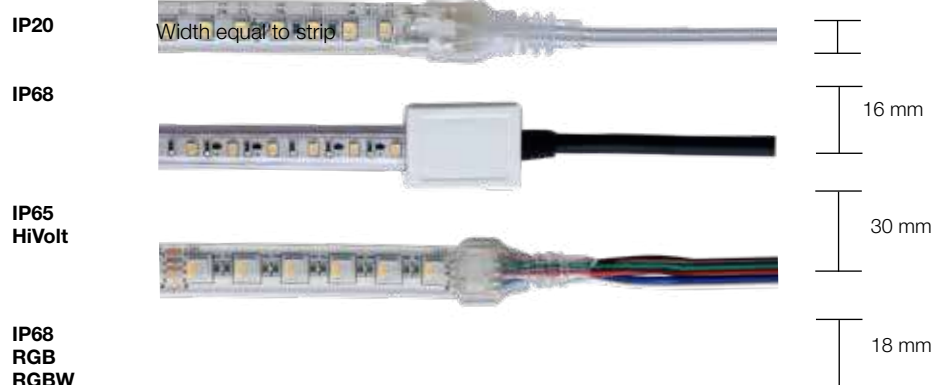

IP20, 65 or 68?

All profiles have an IP20 rating.

The simple end cap closing mechanism does not make it possible to achieve higher IP protection unless the strip positioned inside is itself protected from dust and water.

If the ends of the profiles are resinated and the strip is equipped with sufficient cabling then the profile can be used as IP65 (protected from low pressure water jets) or IP67 (protected from brief immersion in water).

IP68: factory custom made

In the event of significantly sized projects it is possible to request the profiles are sealed to obtain IP68.

All strips selected will be connected with a cable equipped with an IP68 jack and all profiles of the requested size will be sealed to obtain IP68 protection.

Profiles Summary Table

PROFILE DIMENSIONS AND MAXIMUM WIDTH OF STRIPS TO BE USED

article	Page	IP	Max strip mm	L1	H	L	USE
PRAP-U		IP20	18	22	19,8	2000	▶▶▶▶ surface
PRAP20-2MK		IP20	12	16	12	2000	
PRAP68-2MK		IP20	15	21	13	2000	
P02B-S-PF-200		IP20	12	17,5	13	2000	
P03B-S-PF-200		IP20	15	19,5	15,7	2000	
P03F-S-PF-200		IP20	12	28,85	19	2000	
P08D-S-PF-200		IP20	34	62,5	50,5	2000	
P055-200-KIT		IP20	10	41,7	41,7	2000	▶▶ recessed
P055-300-KIT		IP20		62	73	3000	
PRIN-U		IP20	18	26,7	22,3	2000	
PRIN20-2MK		IP20	10	24	12	2000	
PRIN68-2MK		IP20	15	29	13	2000	
P03E-S-PF-200		IP20	15	29	13	2000	
PRAN-U		IP20	18	32,8	19,9	2000	▶▶ corner
PRAN20-2MK		IP20	12			2000	
PRAN68-2MK		IP20	14			2000	
P01L-S-PF-200		IP20	35	46	50,5	2000	▶▶ suspensions
P06H-S-PF-200		IP20	30	Ø 60		2000	

Surface profiles

SURFACE PROFILES: PRAP-U

FEATURES

Aluminium profile for surface installation.
It houses both IP20 and IP68 strips up to 18 mm in width.
Equipped with a compartment to accommodate cables.

CAN BE USED WITH LED STRIPS WITH MAXIMUM WIDTH:
18 mm

INSTALLATION

Surface installation with its fixing clips.

MATERIAL


6063 Aluminium profile with a white PC screen.


ACCESSORIES

Every 2 metre bar is complete with 1 set of end caps (with and without holes) and 1 set of mounting clips.
Spare accessories available with a separate code.
Screens with different beam openings, spot, flood and asymmetrical available to replace the standard screen the profile is equipped with.

PACKAGING

Supplied in packages of 5 bars, each one measuring 2 meters complete with screen and accessories.



L	L1	H		ART.
2000	22	19.8	5 / 5	PRAP-U

STEEL SUPPORTS



Steel supports

Set of steel adjustable supports for profiles.
Can be used with the PRAP-U profile.



1 / 1

ART.

OR-DEV

SET OF ALUMINIUM MOUNTING HEADS FOR PRAP-U PROFILES



Set of aluminium mounting heads

To be ordered together with the code of the adjustable support to be fixed to the surface, code OR-DEV.



1 / 1

ART.

KTORDEV-U

END CAPS FOR PRAP-U



End caps for PRAP-U

Includes 5 PC end caps without hole + 5 PC end caps with hole for the cable, silver colour.
This same set of accessories is also available in the profile pack.
The accessory code must be added as a spare part or for additional cuts.



1 / 1

ART.

KTPRAP-UEC

Accessories

SURFACE PROFILES: PRAP-U

ACCESSORIES KIT FOR PRIN-U E PRAP-U



Clips kit for PRIN-U e PRAP-U

Includes 5 pairs of clips.



1 / 1



KTPRU-CL

REPLACEMENT LENSES FOR UNIVERSAL PROFILES 120°



Replacement lenses for Universal profiles 120°

5 pcs set.



5 / 5



PRU-LENS

OPTIONAL SPOT LENS FOR UNIVERSAL PROFILES



Optional SPOT lens

5 pcs set.



5 / 5



PRULENS30

OPTIONAL FLOOD LENS FOR UNIVERSAL PROFILES



Optional FLOOD lens

5 pcs set.



5 / 5



PRULENS60

OPTIONAL ASYMMETRICAL LENS FOR UNIVERSAL PROFILES



Optional ASYMMETRICAL lens

5 pcs set.



5 / 5



PRULENSASYM

Surface profiles

SURFACE PROFILES: PRAP

FEATURES

Aluminium profile for surface mounting installations.

Aluminium profiles allow for a more stable installation, in case of linear installations.

Recommended for indoor and outdoor (protected) applications and for high power strips in order to better heat dissipation.

CAN BE USED WITH LED STRIPS WITH MAXIMUM WIDTH:

12 mm (PRAP20) and 15 mm (PRAP68).

MAXIMUM POWER:

20W/m 20 Series

25W/m 68 Series

INSTALLATION

Surface installation with its fixing clips.

IP65 or IP68 strips the connectors rest outside the profile.

MATERIAL

6063 Aluminium profile with a white PC screen.


ACCESSORIES


Every 2 metre bar is complete with 1 set of end caps (with and without hole).

Spare accessories available with a separate code.

PACKAGING

Supplied in packages of 5 bars, each one measuring 2 meters complete with screen and accessories.

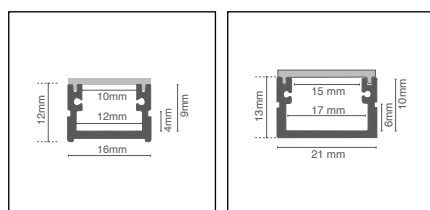

L	L1	H		ART.
2000	16	12	5 / 5	PRAP20-2MK
2000	21	13	5 / 5	PRAP68-2MK

ACCESSORIES KIT FOR PRAP



		ART.
Accessories kit for PRAP20	1 / 1	KTPRAP20
Accessories kit for PRAP68	1 / 1	KTPRAP68

Includes 5 end caps without hole + 5 end caps with hole for the cable.

STEEL SUPPORTS



		ART.
Steel supports	1 / 1	OR-DEV



Set of steel adjustable supports for profiles.
Can be used with the PRAP-U profile.

Accessories

SURFACE PROFILES: PRAP

ALUMINIUM MOUNTING HEADS FOR PRAP68-2M AND PRAP68-2MK



		
Set of aluminium mounting heads	1 / 1	OR-DEVKT68
<p>Set of aluminium mounting heads for PRAP68-2M and PRAP68-2MK. To be ordered together with the code of the adjustable support to be fixed to the surface, code OR-DEV.</p>		

Surface profiles

SURFACE PROFILES: P02B

FEATURES

Profile for surface or recessed installation with limited width.

CAN BE USED WITH LED STRIPS WITH MAXIMUM WIDTH:

12 mm

MAXIMUM POWER:

20W/m

INSTALLATION

Surface or recessed.

Cabling can be in line with the profile or exit the bottom of the profile.

MATERIAL

6063 aluminium profile with white PMMA screen.


ACCESSORIES

Every 2 metre bar is complete with 2 sets of end caps (with and without hole) and 2 sets of mounting clips.

PACKAGING

Supplied in minimum packages of 5 bars, each one measuring 2 meters complete with screen and accessories.

Spare accessories for additional cutting available with a separate code.



L	L1	H		ART.
2000	17.5	13.5	1 / 5	P02B-S-PF-200

END CAPS KIT



End caps for P02B



1 / 1

ART.

P02B-A-EC

Includes 3 PC end caps without hole + 3 PC end caps with hole for the cable, silver colour.

This same set of accessories is also available in the profile pack.

The accessory code must be added as a spare part or for additional cuts.

CLIPS KIT



Metal clips



1 / 1

ART.

P02B-A-MC

Includes 3 pairs of metal clips.

Surface profiles

SURFACE PROFILES: P03B

FEATURES

Profile for surface or recessed installation with limited width.

CAN BE USED WITH LED STRIPS WITH MAXIMUM WIDTH:

15 mm

MAXIMUM POWER:

25W/m

INSTALLATION

Surface or recessed.

Cabling can be in line with the profile or exit the bottom of the profile.

MATERIAL

6063 aluminium profile with white PMMA screen.


ACCESSORIES






Every 2 metre bar is complete with 2 sets of end caps (with and without hole) and 2 sets of mounting clips.

PACKAGING

Supplied in minimum packages of 5 bars, each one measuring 2 meters complete with screen and accessories.

Spare accessories for additional cutting available with a separate code.



				
L	L1	H		ART.
2000	19.5	15.7	1 / 5	P03B-S-PF-200

END CAPS KIT



End caps for P03B

Includes 3 PC end caps without hole + 3 PC end caps with hole for the cable, silver colour.
This same set of accessories is also available in the profile pack.
The accessory code must be added as a spare part or for additional cuts.



1 / 1



P03B-A-EC

CLIPS KIT



Metal clips

Includes 3 pairs of metal clips.



1 / 1



P03B-A-MC

Surface profiles

SURFACE PROFILES: P03F

FEATURES

Surface or recessed corner profile with edge protection finishing flaps to form pleasantly rounded relief.

CAN BE USED WITH LED STRIPS WITH MAXIMUM WIDTH:

12 mm

MAXIMUM POWER:

25W/m

INSTALLATION

Cabling can be in line with the profile or exit the bottom of the profile.

MATERIAL

6063 aluminium profile with white PMMA screen.


ACCESSORIES

Every 2 metre bar is complete with 2 sets of end caps (with and without hole) and 2 sets of mounting clips.

PACKAGING

Supplied in minimum packages of 5 bars, each one measuring 2 meters complete with screen and accessories.

Spare accessories for additional cutting available with a separate code.



L	L1	H		ART.
2000	26.85	19	1 / 5	P03F-S-PF-200

END CAPS KIT



End caps for P03F



1 / 1



P03F-A-EC

Includes 3 PC end caps without hole + 3 PC end caps with hole for the cable, silver colour.
This same set of accessories is also available in the profile pack.
The accessory code must be added as a spare part or for additional cuts.

CLIPS KIT



Metal clips



1 / 1



P03F-A-MC

Includes 6 metal mounting clips.

Recessed profiles

RECESSED PROFILES: PRIN-U

FEATURES

Aluminium profile for recessed installation.
It houses both IP20 and IP68 strips up to 18 mm in width.
Equipped with a compartment to accommodate cables.

CAN BE USED WITH LED STRIPS WITH MAXIMUM WIDTH:
18 mm

INSTALLATION

Recessed.

MATERIAL


6063 Aluminium profile with a white PC screen.

ACCESSORIES

Every 2 metre bar is complete with 1 set of end caps (with and without holes) and 1 set of mounting clips.
Spare accessories available with a separate code.
Screens with different beam openings, spot, flood and asymmetrical available to replace the standard screen it is equipped with.

PACKAGING

Supplied in packages of 5 bars, each one measuring 2 meters complete with screen and accessories.



L	L1	H		ART.
2000	22	19.8	5 / 5	PRIN-U

ACCESSORIES KIT FOR PRIN-U



End caps for PRIN-U

Includes 5 PC end caps without hole + 5 PC end caps with hole for the cable, silver colour.
This same set of accessories is also available in the profile pack.
The accessory code must be added as a spare part or for additional cuts.



1 / 1

ART.

KTPRIN-UEC

ACCESSORIES KIT FOR PRIN-U E PRAP-U



Clips kit for PRIN-U e PRAP-U

Includes 5 pairs of clips.



1 / 1

ART.

KTPRU-CL

REPLACEMENT LENSES FOR UNIVERSAL PROFILES 120°



Replacement lenses for Universal profiles 120°

5 pcs set.



5 / 5

ART.

PRU-LENS

Accessories

RECESSED PROFILES: PRIN-U

OPTIONAL SPOT LENS FOR UNIVERSAL PROFILES



Optional SPOT lens

5 pcs set.



5 / 5



PRULENS30

OPTIONAL FLOOD LENS FOR UNIVERSAL PROFILES



Optional FLOOD lens

5 pcs set.



5 / 5



PRULENS60

OPTIONAL ASYMMETRICAL LENS FOR UNIVERSAL PROFILES



Optional ASYMMETRICAL lens

5 pcs set.



5 / 5



PRULENSASYM

Recessed profiles

RECESSED PROFILES: PRIN

FEATURES

Aluminium profile for recessed installation.

Aluminium profiles allow for a more stable installation, in case of linear installations.

Recommended for indoor and outdoor (protected) applications and for high power strips in order to better heat dissipation.

CAN BE USED WITH LED STRIPS WITH MAXIMUM WIDTH:

13 mm (PRIN20) and 17 mm (PRIN68).

MAXIMUM POWER:

20W/m 20 Series

25W/m 68 Series

INSTALLATION

Recessed with its fixing clips.

IP65 or IP68 strips the connectors rest outside the profile.

MATERIAL

6063 Aluminium profile with a white PC screen.


ACCESSORIES


Every 2 metre bar is complete with 1 set of end caps (with and without hole).

Spare accessories available with a separate code.

PACKAGING


Supplied in packages of 5 bars, each one measuring 2 meters complete with screen and accessories.



L	L1	H		ART.
2000	24	12	5 / 5	PRIN20-2MK
2000	29	13	5 / 5	PRIN68-2MK

ACCESSORIES KIT FOR PRIN20



		ART.
Accessories kit for PRIN20	1 / 1	KTPRIN20
Accessories kit for PRIN68	1 / 1	KTPRIN68

Includes 5 end caps without hole + 5 end caps with hole for the cable.

Recessed profiles

RECESSED PROFILES: P08D

FEATURES

Recessed profile with edge protection finishing flaps.
Equipped with a guide to fix the LED strips to.

CAN BE USED WITH LED STRIPS WITH MAXIMUM WIDTH:
34 mm

MAXIMUM POWER:
40W/m

INSTALLATION

Recessed.

Cabling can be in line with the profile or exit the bottom of the profile.

MATERIAL


6063 aluminium profile with white PMMA screen.


ACCESSORIES

Every 2 metre bar is complete with 2 sets of end caps (with and without hole) and 2 sets of springs for the ceiling.
Spare accessories for additional cutting available with a separate code.

PACKAGING

Supplied in packaging of 1 bars of 2 meters complete with screen and accessories.



L	L1	H		ART.
2000	44	50.5	1 / 1	P08D-S-PF-200

END CAPS KIT



End caps for P08D



1 / 1

ART.

P08D-A-EC

Includes 2 PC metal end caps without hole + 2 PC metal end caps with hole for the cable.
This same set of accessories is also available in the profile pack.
The accessory code must be added as a spare part or for additional cuts.

SPRING FOR CEILING MOUNTING



Spring for ceiling mounting of P08D



1 / 1

ART.

P08D-A-SP

Includes 3 pairs of metal springs to attach to the ceiling.

Recessed profiles

RECESSED PROFILES: P055

FEATURES

Aluminium profile for recessed installation.

Aluminium profiles allow for a more stable installation, in case of linear installations.

Recommended for indoor and outdoor (protected) applications and for high power strips in order to better heat dissipation.

CAN BE USED WITH LED STRIPS WITH MAXIMUM WIDTH:

30 mm

MAXIMUM POWER:

42W/m

INSTALLATION

Recessed.

Steel spring mounting system for recessed ceiling installation from a minimum of 5mm.


MATERIAL


6063 Aluminium profile with a white PC screen.

ACCESSORIES

Every 2 metre bar is complete with 2 sets of end caps (with and without hole) and 2 sets of mounting clips.

Spring for false ceiling mounting of P055 available with separate code.



	L	L1	L2	H		ART.
New	3000	70	55	35	1 / 5	P055-300-KIT ●
New	2000	70	55	35	1 / 5	P055-200-KIT

● On request.

SPRING FOR CEILING MOUNTING



New Spring for ceiling mounting of P055



1 / 1

P055-A-FS



Recessed profiles

WALK OVER PROFILE: P03E

FEATURES

Rigid high impact resistant aluminum and PMMA profile complete with white PC diffuser cover.

The profile is walk over and complete with a guide to facilitate insertion of the strip.

This adds strength and protection to the strip.

CAN BE USED WITH LED STRIPS WITH MAXIMUM WIDTH:

9 mm

MAXIMUM POWER:

15W/m

INSTALLATION

ACCESSORIES INCLUDED: 1 side cap without a hole and 1 side cap with a hole, screws and clips.

ACCESSORIES

Every 2 metre bar is complete with 2 end caps (with and without hole).


PACKAGING

Supplied in minimum packages of 5 bars, each one measuring 2 meters complete with screen and accessories.

Spare accessories for additional cutting available with a separate code.

NOTES

The profiles reach IP67 if sealed correctly.



L	L1	H		ART.
2000	20.2	16.2	1 / 5	P03E-S-PF-200

END CAPS KIT



	ART.
End caps for P03E	P03E-A-EC

Includes 3 PC end caps without hole + 3 PC end caps with hole for the cable, silver colour.
This same set of accessories is also available in the profile pack.
The accessory code must be added as a spare part or for additional cuts.

Corner profiles

PRAN-U CORNER PROFILE

FEATURES

Aluminium profile for surface or suspension installation with special brackets and cables.

It houses both IP20 and IP68 strips up to 18 mm in width.

Equipped with a compartment to accommodate cables.

CAN BE USED WITH LED STRIPS WITH MAXIMUM WIDTH:
18 mm

INSTALLATION

Surface.

Equipped with a compartment to pass cables through.

This profile can be suspension mounted by using the steel slides and suspension cable kit that are available with a separate code.

The slides can also act as blocks to join two adjacent profiles.

MATERIAL

6063 Aluminium profile with a white PC screen.

ACCESSORIES


Every 2 metre bar is complete with 1 set of end caps (with and without holes) and 1 set of mounting clips.


PACKAGING

Supplied in packages of 5 bars, each one measuring 2 meters complete with screen and accessories.

Spare accessories available with a separate code.

Screens with different beam openings, spot, flood and asymmetrical available to replace the standard screen it is equipped with.



L	L1	H		ART.
2000	32.8	20	5 / 5	PRAN-U

END CAPS KIT



End caps for PRAN-U

End caps for PRAN-U.



1 / 1



KTPRAN-UEC

ACCESSORIES KIT FOR PRAN-U



Accessories kit for PRAN-U

Includes 5 pairs of metal clips.



1 / 1



KTPRAN-UCL

Accessories

PRAN-U CORNER PROFILE

SLIDING BRACKETS FOR FIXING



Accessories kit for PRAN-U

Includes set of 1 sliding bracket for fixing.



1 / 1



ART.

KTPRAN-US

ADJUSTABLE STEEL CABLES



Adjustable steel cables

▼ To be discontinued.



L

1500



1 / 1



ART.

KTLP-SP ▼

REPLACEMENT LENSES FOR UNIVERSAL PROFILES 120°



Replacement lenses for Universal profiles 120°

5 pcs set.



5 / 5



ART.

PRU-LENS

OPTIONAL SPOT LENS FOR UNIVERSAL PROFILES



Optional SPOT lens

5 pcs set.



5 / 5



ART.

PRULENS30

OPTIONAL FLOOD LENS FOR UNIVERSAL PROFILES



Optional FLOOD lens

5 pcs set.



5 / 5



ART.

PRULENS60

OPTIONAL ASYMMETRICAL LENS FOR UNIVERSAL PROFILES



Optional ASYMMETRICAL lens

5 pcs set.



5 / 5



ART.

PRULENSASYM

Corner profiles

CORNER PROFILE: PRAN

FEATURES

Aluminium profile for corner surface installation.

Aluminium profiles allow for a more stable installation, in case of linear installations.

Recommended for indoor and outdoor (protected) applications and for high power strips in order to better heat dissipation.

CAN BE USED WITH LED STRIPS WITH MAXIMUM WIDTH:

10 mm (PRAN20) and 14 mm (PRAN68).

MAXIMUM POWER:

20W/m 20 Series

25W/m 68 Series

INSTALLATION

Surface, corner installation with its fixing clips.

MATERIAL

6063 Aluminium profile with a white PC screen.


ACCESSORIES


Every 2 metre bar is complete with 1 set of end caps (with and without hole).

Spare accessories available with a separate code.

PACKAGING


Supplied in packages of 5 bars, each one measuring 2 meters complete with screen and accessories.

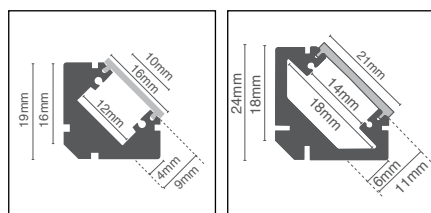

L	L1	H		ART.
2000	19	19	5 / 5	PRAN20-2MK
2000	24	24	5 / 5	PRAN68-2MK

ACCESSORIES KIT FOR PRAN



		ART.
Accessories kit for PRAN20	1 / 1	KTPRAN20
Accessories kit for PRAN68	1 / 1	KTPRAN68

Includes 5 end caps without hole + 5 end caps with hole for the cable.

Decorative profiles

DECORATIVE SUSPENSION PROFILES: P01L

FEATURES

Aluminium profile for suspension installation.

Diffuser flush with the profile.

The dimensions of the profile, 4,6 x 5 cm, mean that this profile can be installed anywhere and responds to many needs using the same aesthetic element.

CAN BE USED WITH LED STRIPS WITH MAXIMUM WIDTH:

35 mm

MAXIMUM POWER:

40W/m

INSTALLATION

Suspension installation.

The profile housing allows for some drivers to be inserted: always check dimensions and electrical loads.

MATERIAL

6063 aluminium profile with white PMMA screen.

ACCESSORIES

Every 2 metre bar is complete with 2 sets of end caps (with and without hole) and 2 sets of suspension cables.


PACKAGING






Supplied in packaging of 1 bars of 2 meters complete with screen and accessories.

Spare accessories for additional cutting available with a separate code.

NOTES

Thanks to the possibility of using different strips the profile becomes a fixture that can provide different light temperatures, to be used depending on the activities carried out in that space at different times during the day.



				
2000	46	50.5	1 / 1	P01L-S-PF-200

END CAPS KIT



End caps for P01L

Includes 3 PC end caps without hole + 3 PC end caps with hole for the cable, silver colour.
This same set of accessories is also available in the profile pack.
The accessory code must be added as a spare part or for additional cuts.



ART.

1 / 1

P01L-A-EC

SUSPENSION CABLES FOR P01L



Suspension cables for P01L

Includes 3 pairs of suspension cables of 1,5 m.
1 set for every metre is recommended.



ART.

1 / 1

P01L-A-FS

Decorative profiles

DECORATIVE SUSPENSION PROFILES: P06H

FEATURES

Suspension profile.

Circular diffuser with 360° light emission.

The essential design of this profile and the 360° beam opening, allows for this profile to be installed anywhere whilst responding to many needs using the same aesthetic element.

CAN BE USED WITH LED STRIPS WITH MAXIMUM WIDTH:

30 mm

MAXIMUM POWER:

42W/m

INSTALLATION

Suspension installation.

Driver and controller must be positioned remotely to the profile.

MATERIAL

6063 aluminium profile with white polycarbonate screen.

ACCESSORIES

Every 2 metre bar is complete with 2 sets of end caps (without hole) and 2 sets of suspension cables.


PACKAGING

Supplied in packaging of 1 bars of 2 meters complete with screen and accessories.

Spare accessories for additional cutting available with a separate code.

NOTES

Thanks to the possibility of using different strips the profile becomes a fixture that can provide different light temperatures, to be used depending on the activities carried out in that space at different times during the day.



			
60	2000	1 / 1	P06H-S-PF-200

END CAPS KIT



		
End caps for P06H	1 / 1	P06H-A-EC

Includes 2 PC metal end caps without hole + 2 PC metal end caps with hole for the cable.
This same set of accessories is also available in the profile pack.
The accessory code must be added as a spare part or for additional cuts.

SUSPENSION CABLES FOR P06H



		
Suspension cables for P06H	1 / 1	P06H-A-FS

Includes 3 pairs of suspension cables of 1,5 m.
1 set for every metre is recommended.



01U302411EX-TB	25	05U272424IN	27	07U272405IN-SB	33	07U276524INHCH	77
01U302411IN-TB	25	05U302405EX	29	07U272405INPE	45	07U27HVE12	133
01U302414EX-MB	23	05U302405IN	27	07U272405XO	35	07U27HVE12-D	135
01U302414EX-TB	25	05U302412EX	29	07U272405XOPE	47	07U27HVV12-D	135
01U302414IN-MB	23	05U302412IN	27	07U272407INEB	57	07U302405IN	33
01U302414IN-TB	25	05U302424EX	29	07U272407INEN	51	07U302405INPE	45
01U302419IN-TB	25	05U302424IN	27	07U272407INHE	41	07U302405XO	35
01U302424IN-MB	23	05U402405EX	29	07U272407XOHE	43	07U302405XO-SB	35
01U302424IN-TB	25	05U402405IN	27	07U272410IN	33	07U302405XOPE	47
01U402411EX-TB	25	05U402405IN	27	07U272410INPE	45	07U302407INEB	57
01U402411IN-TB	25	05U402412EX	29	07U272410XO	35	07U302407INEN	51
01U402414EX-MB	23	05U402412IN	27	07U272410XOPE	47	07U302407INHE	41
01U402414EX-TB	25	05U402424EX	29	07U272411EXUEN	53	07U302407XOHE	43
01U402414IN-MB	23	05U402424IN	27	07U272411INHE	41	07U302410IN	33
01U402414IN-TB	25	05U652405EX	29	07U272411INUEN	51	07U302410INPE	45
01U402419IN-TB	25	05U652412EX	29	07U272411XOHE	43	07U302410XO	35
01U402424IN-MB	23	05U652412IN	27	07U272412IN	33	07U302410XOPE	47
01U402424IN-TB	25	05U652424EX	29	07U272412XO	35	07U302411EXUEN	53
01U602411EX-TB	25	05U652424IN	27	07U272414EX-TB	39	07U302411INHE	41
01U602411IN-TB	25	05UCE2414XO	87	07U272414IN-TB	37	07U302411INL2000	59
01U602414EX-MB	23	05URE2414XO	87	07U272414INBD	55	07U302411INUEN	51
01U602414EX-TB	25	05UWE2414XO	87	07U272414INFS	71	07U302411XOHE	43
01U602414IN-MB	23	05UYE2414XO	87	07U272414INHE	41	07U302411XOL2000	61
01U602414IN-TB	25	07375RGBW	95	07U272414XOFS	73	07U302412IN	33
01U602419IN-TB	25	07575RGBW	93	07U272414XOHE	43	07U302412XO	35
01U602424IN-MB	23	07U18302410EXK	81	07U272415IN	33	07U302414EX-TB	39
01U602424IN-TB	25	07U18302410INK	79	07U272415INPE	45	07U302414IN-TB	37
03U272407INCB	21	07U183524EXHC	77	07U272415XO	35	07U302414INBD	55
03U272410INCB	21	07U183524INHCH	77	07U272415XOPE	47	07U302414INFS	71
03U302407INCB	21	07U222405IN	33	07U272419EX-TB	39	07U302414INHE	41
03U302410INCB	21	07U222405XO	35	07U272419IN-TB	37	07U302414XOFS	73
03U352407INCB	21	07U222407INEN	51	07U272419XWA	67	07U302414XOHE	43
03U352410INCB	21	07U222410IN	33	07U272419XWG	69	07U302415IN	33
03U402407INCB	21	07U222410XO	35	07U272421INHE	41	07U302415INPE	45
03U402410INCB	21	07U222411EXUEN	53	07U272421XOHE	43	07U302415XO	35
03U602407INCB	21	07U222411INUEN	51	07U272422XOPE	47	07U302415XOPE	47
03U602410INCB	21	07U222412IN	33	07U272424EX-TB	39	07U302419EX-TB	39
05U272405EX	29	07U222412XO	35	07U272424IN-TB	37	07U302419IN-TB	37
05U272405IN	27	07U222414INBD	55	07U272424INPE	45	07U302419XWA	67
05U272412EX	29	07U222415IN	33	07U27602410EXK	81	07U302419XWG	69
05U272412IN	27	07U222415XO	35	07U27602410INK	79	07U302421INHE	41
05U272424EX	29	07U272405IN	33	07U276524EXHC	77	07U302421XOHE	43

07U302422XOPE	47	07U352419XWA	67	07U402419EX-TB	39	07U602415INPE	45
07U302424EX-TB	39	07U352419XWG	69	07U402419IN-TB	37	07U602415XO	35
07U302424IN-TB	37	07U352421INHE	41	07U402419XWA	67	07U602415XOPE	47
07U302424INPE	45	07U352421XOHE	43	07U402419XWG	69	07U602419EX-TB	39
07U302430XO(1)	35	07U352422XOPE	47	07U402421INHE	41	07U602419IN-TB	37
07U302442INTR	49	07U352424EX-TB	39	07U402421XOHE	43	07U602419XWA	67
07U304806INL5000	63	07U352424IN-TB	37	07U402422XOPE	47	07U602419XWG	69
07U304806XOL5000	65	07U352424INPE	45	07U402424EX-TB	39	07U602421INHE	41
07U30HVE12	133	07U35HVE12-D	135	07U402424IN-TB	37	07U602421XOHE	43
07U30HVE12-D	135	07U35HVU12-D	135	07U402424INPE	45	07U602422XOPE	47
07U30HVU12-D	135	07U402405IN	33	07U402442INTR	49	07U602424EX-TB	39
07U352405IN	33	07U402405INPE	45	07U404806INL5000	63	07U602424IN-TB	37
07U352405INPE	45	07U402405XO	35	07U404806XOL5000	65	07U602424INPE	45
07U352405XO	35	07U402405XO-SB	35	07U40HVE12	133	07U60HVE12-D	135
07U352405XOPE	47	07U402405XOPE	47	07U40HVE12-D	135	07U60HVU12-D	135
07U352407INEB	57	07U402407INEB	57	07U40HVU12-D	135	07UET2423EX	85
07U352407INEN	51	07U402407INEN	51	07U602405IN	33	07UET2423IN	83
07U352407INHE	41	07U402407INHE	41	07U602405INPE	45	07UHVU1830K	139
07U352407XOHE	43	07U402407XOHE	43	07U602405XO	35	07UHVU2750K	139
07U352410IN	33	07U402410IN	33	07U602405XOPE	47	07URGB2410EX-SB	91
07U352410INPE	45	07U402410INPE	45	07U602407INEB	57	07URGB2410IN-SB	89
07U352410XO	35	07U402410XO	35	07U602407INEN	51	07URGB2412INEN	97
07U352410XOPE	47	07U402410XOPE	47	07U602407INHE	41	09UT240927	105
07U352411EXUEN	53	07U402411EXUEN	53	07U602407XOHE	43	09UT240930	105
07U352411INHE	41	07U402411INHE	41	07U602410IN	33	09UT240935	105
07U352411INUEN	51	07U402411INL2000	59	07U602410INPE	45	09UT240940	105
07U352411XOHE	43	07U402411INUEN	51	07U602410XO	35	09UT240965	105
07U352412IN	33	07U402411XOHE	43	07U602410XOPE	47	09UT2409AM	105
07U352412XO	35	07U402411XOL2000	61	07U602411EXUEN	53	09UT2409BL	105
07U352414EX-TB	39	07U402412IN	33	07U602411INHE	41	09UT2409GL	105
07U352414IN-TB	37	07U402412XO	35	07U602411INUEN	51	09UT2409OR	105
07U352414INBD	55	07U402414EX-TB	39	07U602411XOHE	43	09UT2409RD	105
07U352414INFS	71	07U402414IN-TB	37	07U602412IN	33	09UT2409VR	105
07U352414INHE	41	07U402414INBD	55	07U602412XO	35	09UT241427	105
07U352414XOFS	73	07U402414INFS	71	07U602414EX-TB	39	09UT241430	105
07U352414XOHE	43	07U402414INHE	41	07U602414IN-TB	37	09UT241435	105
07U352415IN	33	07U402414XOFS	73	07U602414INBD	55	09UT241440	105
07U352415INPE	45	07U402414XOHE	43	07U602414INFS	71	09UT241465	105
07U352415XO	35	07U402415IN	33	07U602414INHE	41	09UT24RGB	105
07U352415XOPE	47	07U402415INPE	45	07U602414XOFS	73	10UT240927	113
07U352419EX-TB	39	07U402415XO	35	07U602414XOHE	43	10UT240930	113
07U352419IN-TB	37	07U402415XOPE	47	07U602415IN	33	10UT240935	113



Index



10UT240940	113	11UV2409VR	125	KT10UTL3	114	KT11UVPUL2	125
10UT240965	113	12UM240927	121	KT10UTP1	115	KT11UVPUL3	126
10UT2409AM	113	12UM240930	121	KT10UTP1	122	KT11UVRDL1	125
10UT2409BL	113	12UM240935	121	KT10UTRGBJM1	113	KT11UVRDL2	125
10UT2409GL	113	12UM240940	121	KT10UTRGBJM2	114	KT11UVRDL3	126
10UT2409OR	113	12UM240965	121	KT10UTRGBJM3	114	KT11UVVRL1	125
10UT2409RD	113	KT05EX-2FMC	29	KT10UTRGBL1	113	KT11UVVRL2	125
10UT2409VR	113	KT05EX-3FMC	29	KT10UTRGBL2	114	KT11UVVRL3	126
10UT241427	113	KT05EX-CK	30	KT10UTRGBL3	114	KT12UL1	121
10UT241430	113	KT05EX-FC	29	KT10UTS1	114	KT12UL2	121
10UT241435	113	KT05EX-FMC	29	KT10UVC1	118	KT12UL3	121
10UT241440	113	KT05IN-CON	27	KT10UVJM1	117	KT12UMFP2	122
10UT241465	113	KT05IN-CON-HP	27	KT10UVJM2	118	KT12UMS1	121
10UT24RGB	113	KT05IN-JUN	27	KT10UVJM3	118	KT2PA	33
10UV240927	117	KT05IN-JUN-HP	27	KT10UVL1	117	KT68PA	35
10UV240930	117	KT07UXWL	67	KT10UVL2	118	KT68PA	39
10UV240935	117	KT07UXWL	69	KT10UVL3	118	KT68PA	73
10UV240940	117	KT07UXWL-CL	67	KT10UVP1	119	KT68PA	81
10UV240965	117	KT07UXWL-CL	69	KT10UVRGBJM1	117	KT68PA-RGB	91
10UV2409AM	117	KT07UXWL-UV	67	KT10UVRGBJM2	118	KT68PA-RGBW	95
10UV2409BL	117	KT07UXWL-UV	69	KT10UVRGBJM3	118	KT7500	27
10UV2409GL	117	KT09UTC1	107	KT10UVRGBL1	117	KT7500	33
10UV2409OR	117	KT09UTC1	121	KT10UVRGBL2	118	KTHV1-CL	139
10UV2409RD	117	KT09UTJ1	107	KT10UVRGBL3	118	KTHVCL	133
10UV2409VR	117	KT09UTJM1	106	KT10UVS1	118	KTLP-SP	158
10UV241427	117	KT09UTL1	105	KT11UVBLL1	125	KTORDEV-U	144
10UV241430	117	KT09UTL2	106	KT11UVBLL2	125	KTPRAN-UCL	157
10UV241435	117	KT09UTL2D	106	KT11UVBLL3	126	KTPRAN-UEC	157
10UV241440	117	KT09UTL3	106	KT11UVC1	126	KTPRAN-US	158
10UV241465	117	KT09UTP1	107	KT11UVCYL1	125	KTPRAN20	159
10UV24RGB	117	KT09UTRGBJM1	106	KT11UVCYL2	125	KTPRAN68	159
11UV240927	125	KT09UTRGBJM3	106	KT11UVCYL3	126	KTPRAP-UEC	144
11UV240930	125	KT09UTRGBL1	105	KT11UVGLL1	125	KTPRAP20	146
11UV240935	125	KT09UTRGBL2	106	KT11UVGLL2	125	KTPRAP68	146
11UV240940	125	KT09UTRGBL3	106	KT11UVGLL3	126	KTPRIN-UEC	151
11UV240965	125	KT09UTS1	106	KT11UVL1	125	KTPRIN20	153
11UV2409BL	125	KT10UTC1	114	KT11UVL2	125	KTPRIN68	153
11UV2409CY	125	KT10UTJM1	113	KT11UVL3	126	KTPRU-CL	145
11UV2409GL	125	KT10UTJM2	114	KT11UVORL1	125	KTPRU-CL	151
11UV2409OR	125	KT10UTJM3	114	KT11UVORL2	125	KTUTFP2	107
11UV2409PU	125	KT10UTL1	113	KT11UVORL3	126	KTUTFP2	115
11UV2409RD	125	KT10UTL2	114	KT11UVPUL1	125	KTUVFP2	119

OR-DEV	144	PRULENS60	152
OR-DEV	146	PRULENS60	158
OR-DEVKT68	147	PRULENSASYM	145
P01L-A-EC	160	PRULENSASYM	152
P01L-A-FS	160	PRULENSASYM	158
P01L-S-PF-200	160	ZKCDMX-HV	133
P02B-A-EC	148		
P02B-A-MC	148		
P02B-S-PF-200	148		
P03B-A-EC	149		
P03B-A-MC	149		
P03B-S-PF-200	149		
P03E-A-EC	156		
P03E-S-PF-200	156		
P03F-A-EC	150		
P03F-A-MC	150		
P03F-S-PF-200	150		
P055-200-KIT	155		
P055-300-KIT	155		
P055-A-FS	155		
P06H-A-EC	161		
P06H-A-FS	161		
P06H-S-PF-200	161		
P08D-A-EC	154		
P08D-A-SP	154		
P08D-S-PF-200	154		
PRAN-U	157		
PRAN20-2MK	159		
PRAN68-2MK	159		
PRAP-U	144		
PRAP20-2MK	146		
PRAP68-2MK	146		
PRIN-U	151		
PRIN20-2MK	153		
PRIN68-2MK	153		
PRU-LENS	145		
PRU-LENS	151		
PRU-LENS	158		
PRULENS30	145		
PRULENS30	152		
PRULENS30	158		
PRULENS60	145		



1. Applicability

1.1 These general conditions (hereafter the "Conditions") constitute an integral and essential part of the contract of sale between the Parties. The Conditions shall regulate all legal relationships between Dura Lamp Srl (hereafter "Dura Lamp") and the purchaser (hereafter the "Purchaser") where the said relationships are not disciplined by the applicable terms of the Italian Civil Code (C.C.). The nullity of any of the terms of these Conditions shall not prejudice the validity of the remaining Conditions or the Contract.

1.2 Any changes to these Conditions shall be agreed between the Parties in writing, with the exception of the provisions set down in article 1341 of the Italian C.C..

2. Sales

2.1 Sale requests for the products (hereafter the "Products") shall be accepted 'subject to the seller's approval' and shall be considered to be irrevocable in accordance with and as an effect of article 1329 of the C.C. for a period of 1 (one) month from the date of the order requesting execution without prior acknowledgement, pursuant to and as an effect of article 1327 of the C.C. from the date on which the order is received by Dura Lamp.

2.2 The Products detailed in the individual orders and the relevant accessories shall be supplied to the Purchaser by Dura Lamp with "Retention of Title" pursuant to and as an effect of articles 1523-1526 of the Italian C.C. In this case, the transfer of ownership of the Products to the Purchaser shall take place exclusively upon the full payment of the price agreed, whilst any risks shall be the responsibility of the Purchaser from the moment of delivery of the Products.

2.3 Whilst confirming the terms stated above, the Parties hereby agree that should the Products and relevant accessories be destroyed for causes not attributable to Dura Lamp, the Purchaser shall not be released from the obligation to pay for the same, even where the Products have not yet been delivered.

3. Prices

3.1 The prices detailed on the price list shall be applied to Product sales orders. The aforementioned prices shall be unit prices per single item, except where stated otherwise for certain Products. The Parties shall have the right to agree, in writing, any derogations and/or special conditions of sale.

3.2 Moreover, the Parties hereby agree that the following conditions shall be applied:

- (I) Minimum order: € 300 (three hundred) for Italy - € 750 (seven hundred and fifty) for other countries;
- (II) Delivery free to destination in Italy for orders of € 300 (three hundred) for Italy or more;
- (III) Ex-Works deliveries for other countries.

3.3 The prices given above do not include VAT and installation costs.

3.4 The prices provided in this catalogue shall be valid until a new price list is published.

4. Currency

All prices are given in Euros (exclusive of VAT). Invoices shall be drawn up in Euros.

5. Special requests

Products can be supplied to the Purchaser in non-standard colours and with special features. The relevant price, minimum quantities per order, methods and timing of deliveries shall be agreed in each individual case, in relation to the reference order.

6. Transport

6.1 Dura Lamp shall not be liable for any damage and/or losses which may occur during the transportation of the Products, unless the Products are delivered free at destination.

6.2 Dura Lamp shall have the right to establish the method of transportation to be used for the Products, unless the Parties have previously established a method of transport in writing.

6.3 Upon delivery, the Purchaser shall undertake to verify the condition of the products and shall make any complaints directly to the carrier and/or conduct any actions necessary in the event of loss, misplacement, removal or damage, or delays in transportation and/or the methods of delivery of the Products.

7. Complaints

7.1 In the event that the Products are found to have any faults and/or defects, the Purchaser shall undertake to notify Dura Lamp of the same in writing, by means of a registered letter, no later than 8 (eight) days following the discovery of the said faults and/or defects, at the risk of invalidating the obligations of the guarantee provided by Dura Lamp. In this case, the faulty Products, which should be reported within the terms established, should be returned to Dura Lamp, once the Purchaser has received specific permission to do so in writing.

7.2 In the event that the Purchaser's complaints are held to be valid, Dura Lamp, at its complete discretion, may make the necessary repairs and/or replace the Products, excluding the attribution of any further charges, obligations, indemnification or compensation to the same. The Products in question should be returned to the Dura Lamp Srl plant in Via Pratese 164, 50145, Firenze, Italy. In the event that, following an inspection by Dura Lamp, the Products returned by the Purchaser are not found to be faulty and/or defective, Dura Lamp shall return the Products to the Purchaser, charging the same an amount equal to 15% (fifteen percent) of the value of the said Products.

8. Delivery

8.1 The Parties hereby agree that the terms established for the delivery of the Products shall not be considered absolute or essential and that, in any case, each item shall be exclusively in favor of Dura Lamp, unless otherwise agreed in writing between the Parties.

8.2 In the event of delayed delivery, once 15 (fifteen) days have passed since the agreed date, the Purchaser may send Dura Lamp written warning to complete the delivery within a further term of no more than 15 (fifteen) days from receipt of the same. In the event that Dura Lamp has not completed the delivery within this further term the Purchaser may withdraw from the order with regard to the Products that have not yet been delivered. In this case the Purchaser shall only be obliged to pay Dura Lamp for the Products actually delivered, excluding the payment of any further indemnification and/or compensation to the Purchaser.

8.3 Dura Lamp shall not be responsible for any other breaches, including the failure to deliver or delayed delivery of the Products, caused by events outside its reasonable control such as, purely by way of an example and not limited to the same: the failure to deliver or delayed delivery of manufacturing materials by Dura Lamp's suppliers, equipment breakdowns, strikes and other trade union action, electricity blackouts, suspension of or difficulties with transportation.

9. Payment

9.1 The price due shall be paid by the Purchaser according to the conditions and modalities set down in the order and, in any case, by means of payments made exclusively to "DURA LAMP Srl".

9.2 Dura Lamp shall only recognize the validity of the payments when the same are made in compliance with the provisions of article 9.1 above. This means that amounts paid using any other method shall not be considered to be a payment in discharge of the Purchaser's obligations. The eventual acceptance by Dura Lamp of a bank draft or other trade bill shall only occur with the application of the proviso "under usual reserve".

9.3 In the event of delayed payment with respect to the terms agreed, the Parties hereby agree that bank interest shall be due to Dura Lamp at the current PRIME RATE increased by 3 points. interest shall be applied as of right, with no obligation for Dura Lamp to send the Purchaser a formal notice to pay.

9.4 Moreover, in the event of a delay in payment of more than 15 (fifteen) days, Dura Lamp shall have the right to terminate the order as of right pursuant to article 1456 C.C., sending written notification of the same, barring compensation for any damage.

9.5 In the event that the Parties have agreed upon a method of payment by instalments for the Products, the failure to pay several instalments or just one instalment exceeding one eighth of the overall price of the Products, shall result in the loss of the Purchaser's right to pay in instalments and shall give Dura Lamp the right to request the remaining balance of the price or, alternatively, at its own discretion, to terminate the contract with immediate return of the Products and the acquisition of the instalments paid, as indemnification, barring the right to compensation for any damage sustained.

10. Guarantee

10.1 The Products provided by Dura Lamp shall be guaranteed for a period of 12 (twelve) months from the date of delivery against any manufacturing or material defects and/or faults and against any breakdowns not attributable to the Purchaser. Dura Lamp's only obligation and the Purchaser's right with regard to claims related to the guarantee shall be limited, as decided by Dura Lamp, to the replacement or repair of the defective or non-compliant product or the reimbursement of the price for the purchase of another product. Dura Lamp shall be granted a reasonable amount of time to repair or replace the product, or to make the previously authorized reimbursement. Any defective or non-compliant Products shall become the property of Dura Lamp as soon as they have been replaced or reimbursed.

10.2 The guarantee shall exclude any failures due to circumstances beyond the control of Dura Lamp (lightning, flooding, etc.), as well as any damage caused by the improper use of the Products and/or relevant accessories. Notwithstanding the above, Dura Lamp shall not be bound by the guarantee if the contested defects or non-compliances have occurred as a result of submitting the Products to resistance or environmental tests, the incorrect use of the same, or in the event that the use of or conditions of use of the Products is different from that indicated in the instructions and technical information, as a result of negligence, incorrect installation or accident, or if they derive from improper repairs, alterations, modifications, storage or transportation or by incorrect handling.

10.3 The Purchaser shall send the Products returned in accordance with the terms of the guarantee to the place indicated by Dura Lamp in compliance with the Dura Lamp policy regarding authorization to return materials in force at the time. In the event that the Products returned are found to be compliant or not faulty, the Purchaser shall pay the cost of returning the same as well as the cost of insuring, inspecting and handling the Products.

10.4 LED products Enjoy specific guarantees: details are published on www.duralamp.com

11. Limitation of Liability

11.1 With the sole exclusion of criminal intent and gross negligence, Dura Lamp shall not be liable for loss of profits or savings, loss of reputation or goodwill, any direct, indirect, consequential or special damage that may derive from or be connected to the contract or sale of products or services by Dura Lamp or by the use of the same of a contractual or extra-contractual nature or deriving from any other source, even where Dura Lamp has been notified of or is aware of the possibility of such damage.

11.2 The limitations and exclusions stated in article 11 shall apply within the limits permitted by law.

12. Applicable law and place of jurisdiction

12.1 These Conditions and all the effects of the same shall be governed by Italian law. The Parties hereby agree that any disputes related to these Conditions shall refer to Italian jurisdiction to the exclusion of all others.

12.2 The exclusive place of jurisdiction shall be the registered offices of Dura Lamp Srl, with the express exclusion of any other competing places of jurisdiction.



DURA LAMP S.r.l.
Registered office Via Pratese, 164 – 50145 Firenze
Tel. 055 894 881
e-mail: duralamp@duralamp.it

Registered with the Florence Company Register -
C.F. and VAT number 03312240488
Registered with R.E.A. of Florence at n. 353287 Share capital € 400,000.00 i.v.
Subject to the management and coordination of 3F FILIPPI Srl



A complete list of the Dura Lamp distribution
and project network is available at:

www.duralamp.com

DURALAMP | UNICO Catalogue 24/25

© Copyright 2024 - Dura Lamp S.r.l.

All data and pictures provided in this catalogue are for reference only: since they might change during mass production, they have to be considered nominal values with tolerances. Dura Lamp reserves the right to modify its products in any moment, for technical or commercial reasons.

Photos: Ivan Rossi - Studio Artale - Studio Ceccanti - Alessandro Maurelli - Luca Visentini

Graphic project: Lorenzetti Communication and FD Graphic Studio

Indoor or outdoor setting photos are used to illustrate the possible applications of the product.



duralamp.com