



LESELI MINI PRO - DIMMABLE

Typology

Recessed LED fixtures with built-in driver.

Features


Adjustable dichroic effect optics.
Tilt Adjustability 30°.
Special design of the lens ensures excellent light beam diffusion.
Compact and easy to install.
Flicker Free.

Installation

Complete with springs for easy fastening into false ceilings.

Material


Extruded powder coated aluminium body.

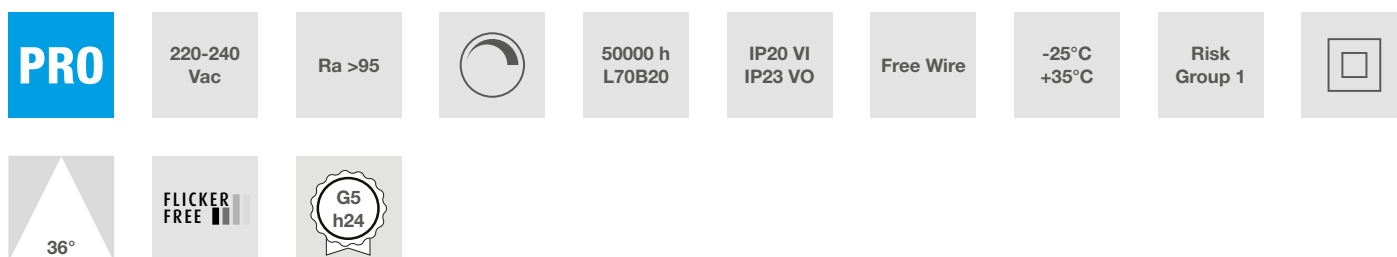

Characteristic data

Power	9 W	Beam	36°	Dimmable	Yes	Input	220-240 Vac
Base	Free Wire	IP	20	Optical compartment IP	23	Flux	575 lm
Axis	1410 cd	PF	0.9	Tc	4000 K	Ra	>95
LED Warranty	G5h24	RG	RG1				

Dimensional characteristics

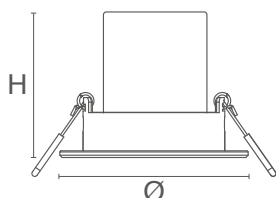

Ø	85 mm
H	55 mm

Cutting hole	68
--------------	----

Lighting and photometric features

Beam opening	36°
Flux	575 lm
Axis	1410 cd
CCT nominal colour temperature	4000 K
Colour of the light	Natural light
Colour rendering index	>95
Lifespan	50000 h
LED lifespan	L70B20
Trigger time	<0,2 s
Heating time up to 60% of full efficiency	Instant Full Light

Electrical characteristics

Rated power	9 W
Input voltage	220-240 Vac
Frequency	50/60 Hz
Dimmable	Yes
Power factor (PF)	0.9
Weighted energy consumption	9 kWh/1000h
Operating temperature	-25°C / +35°C

Photometry

EulumDat file on the site

Other Infotech

Flicker Free	Yes
Reflector	Yes

LED Warranty

G5h24	Full Guarantee 5 years (24h/24h) Without limitations on the duration of use for the first year, provided the observance of the installation conditions.
-------	---

European Directives

2009/125/EC * Ecodesign
2011/65/EU * RoHS
2012/19/EU * RAEE
2014/30/EU * EMC
2014/35/EU * LVD
2015/863 * Amending RoHS
2017/1369 * Regulation for Energy Labelling
2019/2015 * Regulation for Energy Labelling
2019/2020 * Regulation for Ecodesign
2021/340 * Amending Reg. Energy Labelling
2021/341 * Amending Reg. Ecodesign

Product standards

CEI EN 55015:2020 (+A11:2020)
CEI EN 60598-1:2022
CEI EN 60598-2-2:2012
CEI EN 61000-3-2:2019 (+A1:2021)
CEI EN 61000-3-3:2014 (+EC1:2014/+EC2:2016/+A1:2021/+A2:2022)
CEI EN 61547:2010
CEI EN 62031:2021 (+A11:2022)
CEI EN 62471:2010
IEC/TR 62471-2:2009
CEI EN 62493:2015
CEI 34-141:2014

Logistics data

Item net weight	182 gr
Barcode single item	8011905987695
Number of pieces multiple pack	20
Barcode multiple pack	8011905989712
Minimum order quantity	1