


DURA
LAMP

BATTEN



LUMINOUS FITTINGS

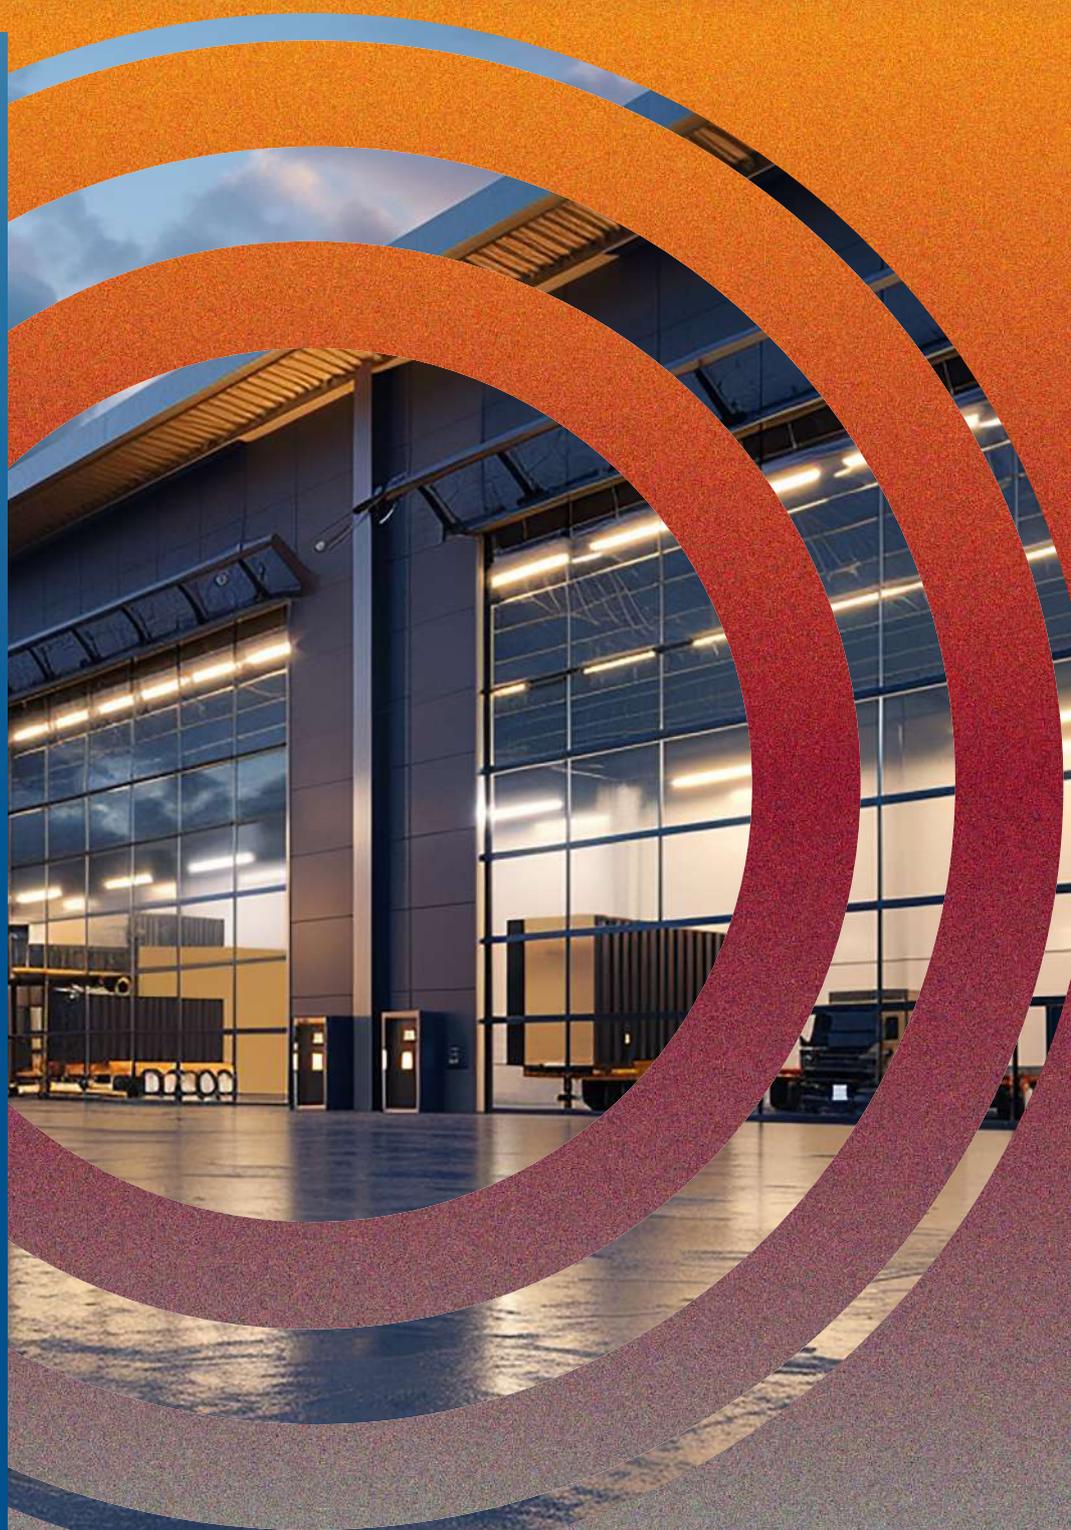



Luminous Fittings

Batten



4 **PRO**
DAMP PROOF
LED LUMINAIRE
MULTIPOWER CCT
IP65



6
DAMP PROOF
LUMINAIRE IP65 -
COMPLETE WITH 2
TUBES



8
DAMP PROOF
LUMINAIRE IP65 -
COMPLETE WITH 1
TUBE



10
DAMP PROOF
LUMINAIRE IP65 -
WITHOUT TUBES



12 **PRO**
BATTEN BT3



14 **BASIC**
MINI BATTEN



16 **BASIC**
FILINO T5 -
REGLETTE

Batten

DAMP PROOF LED LUMINAIRE MULTIPOWER CCT IP65

FLICKER FREE 


Providing greater visual comfort, improved definition of detail and reduction of stress.



9W-18W
1350-2700lm

20W-40W
3000-6000lm

30W-60W
4500-9000lm

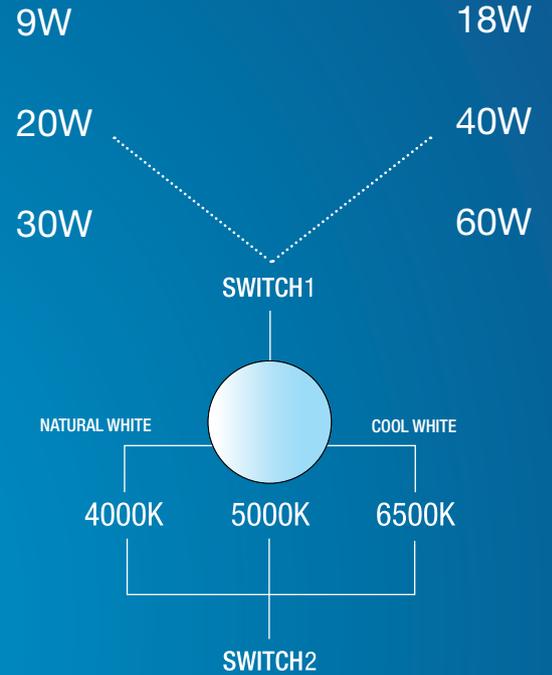

Batten

DAMP PROOF LED LUMINAIRE MULTIPOWER CCT IP65

TPOLOGY

Waterproof linear ceiling light equipped with high-efficiency LEDs. Selectable wattage depending on model, from 9W to 40W. Fitted with a quick spring clamp for connection in series.

FEATURES

Quick opening mechanism for wiring. Easy to connect in series thanks to the quick spring clamp supplied.

INSTALLATION

“Snap on” AISI 316 stainless steel brackets for ceiling or suspension installation. Every batten is equipped with brackets.

MATERIAL


Polycarbonate body: opal polycarbonate screen equipped with internal fins for flow recovery and emission optimization.

APPLICATIONS

Supermarkets, car parks, laboratories, warehouses.

NOTES

The flux data indicated refers to the 4000K colour temperature.



PRO	220-240 Vac	Ra >80		50000 h L70B20	IP65	IK08	-25°C +35°C	Risk Group 0		
------------	-------------	--------	-------------------------------------------------------------------------------------	----------------	------	------	----------------	--------------	---------------------------------------------------------------------------------------	---------------------------------------------------------------------------------------


W	lm	K	PF	L	L1	H		ART.
9-18	1350-2700	4000-5000-6500	0,7	600	85	70	1 / 6	SM060CCT
20-40	3000-6000	4000-5000-6500	0,7	1200	85	70	1 / 6	SM120CCT
30-60	4500-9000	4000-5000-6500	0,7	1500	85	70	1 / 6	SM150CCT

Batten

DAMP PROOF LUMINAIRE IP65 - COMPLETE WITH 2 TUBES

**FLICKER
FREE** 

Providing greater visual comfort,
improved definition of detail and
reduction of stress.

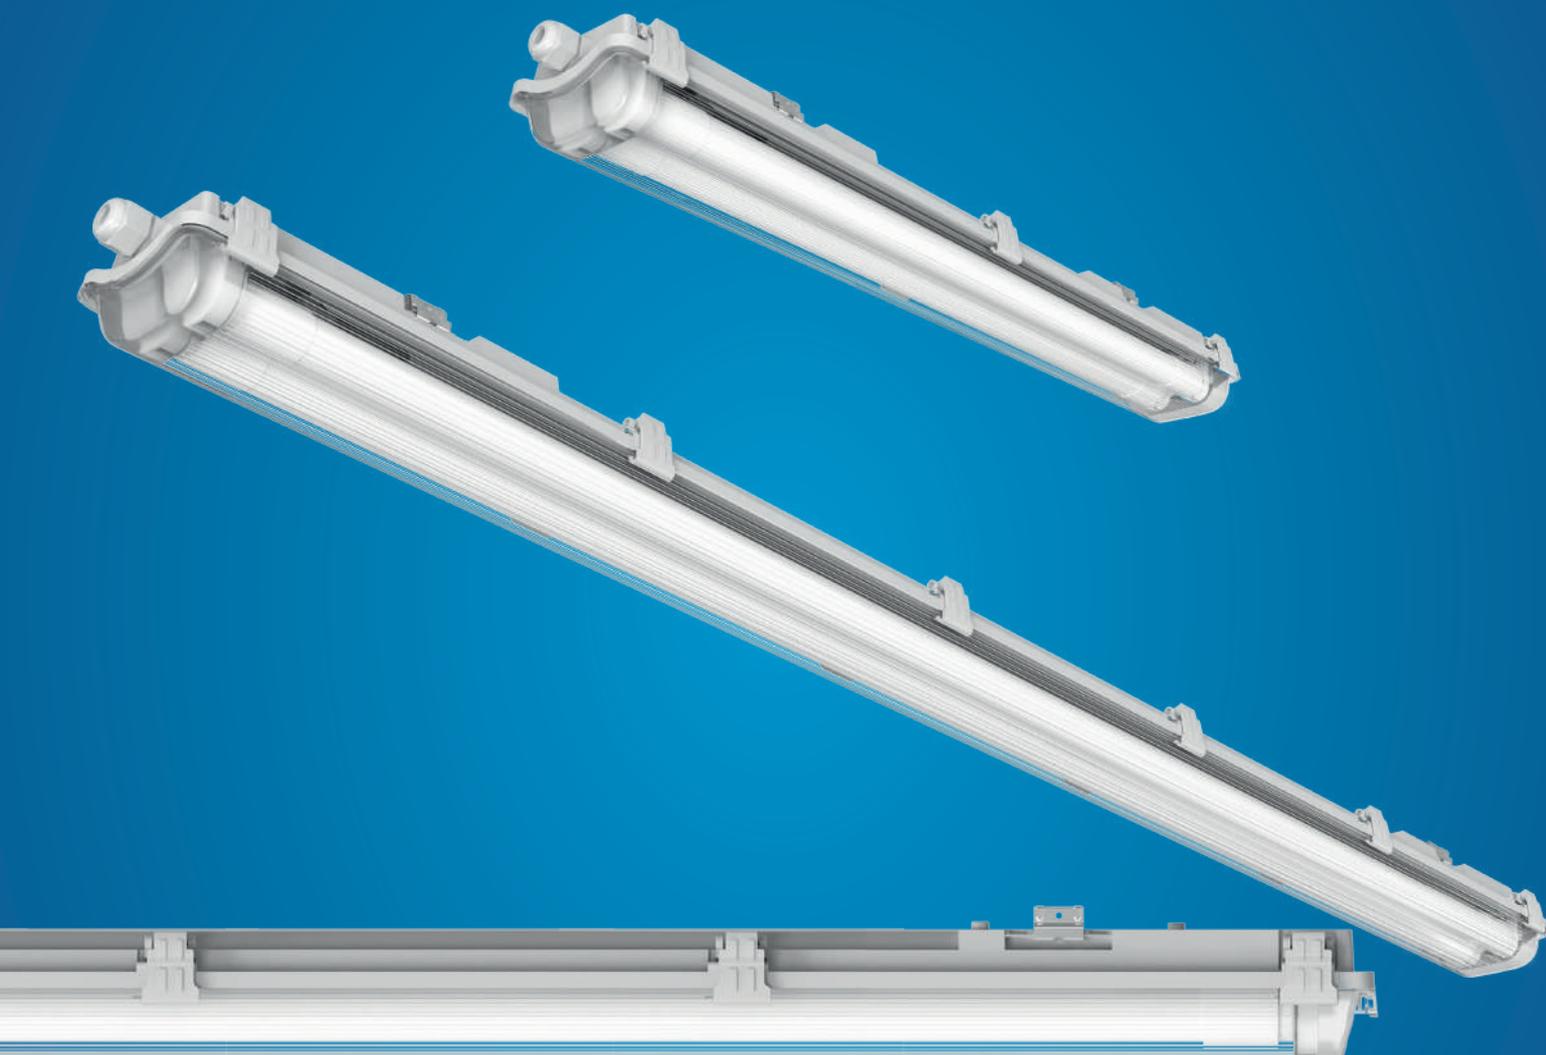

Download photometries
www.duralamp.com

REAL LUMENS

Luminous Flux Data is REAL. Values are measured on actual use conditions.
Nominal values of the LED source are not stated.

Batten

DAMP PROOF LUMINAIRE IP65 - COMPLETE WITH 2 TUBES

TYOLOGY

Waterproof linear ceiling light with G13 connection for 2 TUBOLED.
Complete with 25,000h or 50,000h Tuboled.

FEATURES

Quick opening mechanism for wiring.

INSTALLATION

“Snap on” AISI 316 stainless steel brackets for ceiling or suspension installation.

Every batten is equipped with brackets.

MATERIAL


Polycarbonate body: transparent polycarbonate screen equipped with internal fins for flow recovery and emission optimization.

APPLICATIONS

Supermarkets, car parks, laboratories, warehouses.

NOTES

The power indicated in the table is that of the pre-installed original Duralamp tube.



BASIC 220-240 Vac Ra >80  25000 h L70B50 IP65 IK07 -25°C +35°C Risk Group 0 

DAMP PROOF LUMINAIRE IP65 COMPLETE WITH 2 25000H TUBES

W	W max Tot	lm	K	L	L1	H		ART.
18	20	1760	3000	665	95	60	10 / 10	S2T060L1W
18	20	1850	4000	665	95	60	10 / 10	S2T060L1N
18	20	1850	6000	665	95	60	10 / 10	S2T060L1C
36	40	3470	3000	1275	95	60	10 / 10	S2T0120L1W
36	40	3650	4000	1275	95	60	10 / 10	S2T0120L1N
36	40	3650	6000	1275	95	60	10 / 10	S2T0120L1C
40	44	4275	3000	1575	95	60	10 / 10	S2T0150L1W
40	44	4500	4000	1575	95	60	10 / 10	S2T0150L1N
40	44	4500	6000	1575	95	60	10 / 10	S2T0150L1C

PRO 220-240 Vac Ra >80  50000 h L70B50 IP65 IK07 -25°C +35°C Risk Group 0 

DAMP PROOF LUMINAIRE IP65 COMPLETE WITH 2 50000H TUBES

W	W max Tot	lm	K	L	L1	H		ART.
18	20	1425	3000	665	95	60	10 / 10	S2T060L2W
18	20	1500	4000	665	95	60	10 / 10	S2T060L2N
18	20	1500	6000	665	95	60	10 / 10	S2T060L2C
36	40	2945	3000	1275	95	60	10 / 10	S2T0120L2W
36	40	3100	4000	1275	95	60	10 / 10	S2T0120L2N
36	40	3100	6000	1275	95	60	10 / 10	S2T0120L2C
40	44	3515	3000	1575	95	60	10 / 10	S2T0150L2W
40	44	3700	4000	1575	95	60	10 / 10	S2T0150L2N
40	44	3700	6000	1575	95	60	10 / 10	S2T0150L2C

Batten

DAMP PROOF LUMINAIRE IP65 - COMPLETE WITH 1 TUBE

**FLICKER
FREE** 

Providing greater visual comfort,
improved definition of detail and
reduction of stress.



Download photometries
www.duralamp.com

REAL LUMENS

Luminous Flux Data is REAL. Values are measured on actual use conditions.
Nominal values of the LED source are not stated.

Batten

DAMP PROOF LUMINAIRE IP65 - COMPLETE WITH 1 TUBE

TPOLOGY

Waterproof linear ceiling light with G13 connection for 1 TUBOLED.
Complete with 25,000h or 50,000h Tuboled.

FEATURES

Quick opening mechanism for wiring.

INSTALLATION

“Snap on” AISI 316 stainless steel brackets for ceiling or suspension installation.


Every batten is equipped with brackets.

MATERIAL

Polycarbonate body: transparent polycarbonate screen equipped with internal fins for flow recovery and emission optimization.

APPLICATIONS

Supermarkets, car parks, laboratories, warehouses.



BASIC	220-240 Vac	Ra >80		25000 h L70B50	IP65	IK07	-25°C +35°C	Risk Group 0		
--------------	-------------	--------	--	----------------	------	------	-------------	--------------	--	--

DAMP PROOF LUMINAIRE IP65 COMPLETE WITH 1 25000H TUBE

W	W max Tot	lm	K	L	L1	H		ART.
9	10	875	3000	665	65	60	10 / 10	S1T060L1W
9	10	920	4000	665	65	60	10 / 10	S1T060L1N
9	10	920	6000	665	65	60	10 / 10	S1T060L1C
18	20	1760	3000	1275	65	60	10 / 10	S1T0120L1W
18	20	1850	4000	1275	65	60	10 / 10	S1T0120L1N
18	20	1500	6000	665	65	60	10 / 10	S1T0120L1C
20	22	2140	3000	1575	65	60	10 / 10	S1T0150L1W
20	22	2250	4000	1575	65	60	10 / 10	S1T0150L1N
20	22	2250	6000	1575	65	60	10 / 10	S1T0150L1C

PRO	220-240 Vac	Ra >80		50000 h L70B50	IP65	IK07	-25°C +35°C	Risk Group 0		
------------	-------------	--------	--	----------------	------	------	-------------	--------------	--	--

DAMP PROOF LUMINAIRE IP65 COMPLETE WITH 1 50000H TUBE


W	W max Tot	lm	K	L	L1	H		ART.
10	10	715	3000	665	65	60	10 / 10	S1T060L2W
10	10	750	4000	665	65	60	10 / 10	S1T060L2N
10	10	750	6000	665	65	60	10 / 10	S1T060L2C
18	20	1475	3000	1275	65	60	10 / 10	S1T0120L2W
18	20	1550	4000	1275	65	60	10 / 10	S1T0120L2N
18	20	1550	6000	1275	65	60	10 / 10	S1T0120L2C
20	22	1740	3000	1575	65	60	10 / 10	S1T0150L2W
20	22	1830	4000	1575	65	60	10 / 10	S1T0150L2N
20	22	1830	6000	1575	65	60	10 / 10	S1T0150L2C

Batten

DAMP PROOF LUMINAIRE IP65 - WITHOUT TUBES



HOUSING 1 LED TUBE
NOT INCLUDED

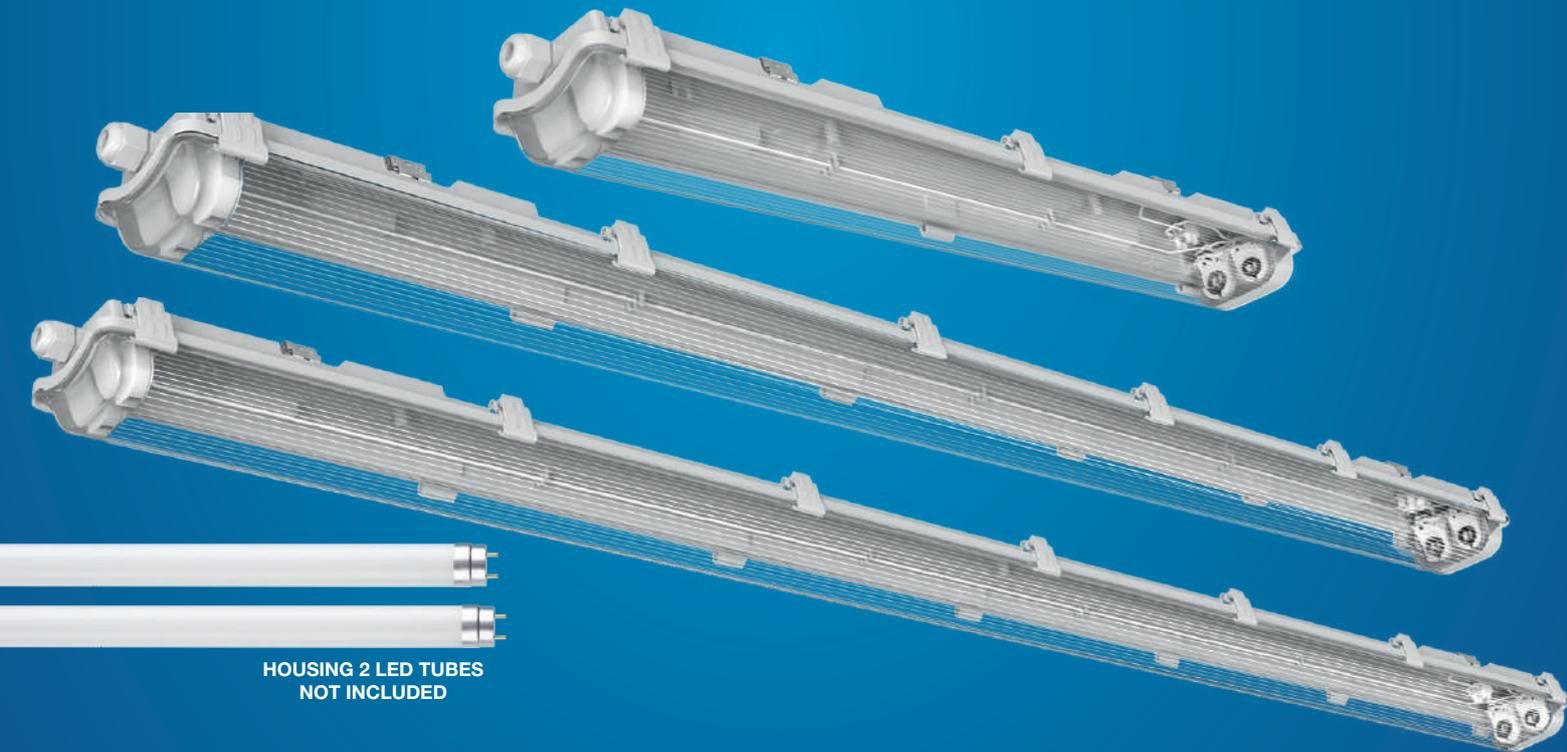

HOUSING 2 LED TUBES
NOT INCLUDED

Batten

DAMP PROOF LUMINAIRE IP65 - WITHOUT TUBES

TYOLOGY

Waterproof linear ceiling light with G13 connection for 1 or 2 TUBOLED.

Tubes not included.

FEATURES

Quick opening mechanism for wiring.

INSTALLATION

“Snap on” AISI 316 stainless steel brackets for ceiling or suspension installation.


Every batten is equipped with brackets.

MATERIAL

Polycarbonate body: transparent polycarbonate screen equipped with internal fins for flow recovery and emission optimization.

APPLICATIONS

Supermarkets, car parks, laboratories, warehouses.



BASIC 220-240 Vac  IP65  IK07  -25°C +35°C   G2

DAMP PROOF LUMINAIRE FOR 1 T8 LED TUBE

W max Tot	L	L1	H		ART.
10	665	65	60	10 / 10	S1T060L2
20	1275	95	60	10 / 10	S1T120L2
22	1575	95	60	10 / 10	S1T150L2

BASIC 220-240 Vac  IP65  IK07  -25°C +35°C   G2

DAMP PROOF LUMINAIRE FOR 2 T8 LED TUBES

W max Tot	L	L1	H		ART.
20	665	95	60	10 / 10	S2T060L2
40	1275	95	60	10 / 10	S2T120L2
44	1575	95	60	10 / 10	S2T150L2

Batten

BATTEN BT3

**FLICKER
FREE** 

Providing greater visual comfort,
improved definition of detail and
reduction of stress.



IP65 RAPID CONNECTION

DESIGNED FOR ENVIRONMENTS WHERE
DIFFUSED LIGHTING AND ELEVATED VISUAL
COMFORT ARE REQUIRED.

IMPACT RESISTANT
EXTRUDED
POLYCARBONATE



CAN BE USED IN SERIES OF UP TO 22 FIXTURES FOR THE
18W MODEL, 11 FIXTURES FOR THE 34W MODEL AND 7
FIXTURES FOR THE 50W MODEL.



REAL LUMENS

Luminous Flux Data is REAL. Values are measured on actual use conditions.
Nominal values of the LED source are not stated.

Batten

BATTEN BT3

TPOLOGY

Linear ceiling fixture equipped with high efficiency LED sources. Fitted with a quick spring clamp for connection in series.

FEATURES

Quick opening mechanism for wiring.

Easy to connect in series thanks to the quick spring clamp supplied.

Can be used in series of up to 22 fixtures for the 18 W model, 11 fixtures for the 34 W model and up to 7 fixtures for the 50 W model.

INSTALLATION

“Snap on” AISI 316 stainless steel brackets for ceiling or suspension installation.

Every batten is equipped with brackets.

Adjustable suspension cables available as a separate code.

MATERIAL

Polycarbonate body: opal polycarbonate screen equipped with internal fins for flow recovery and emission optimization.

APPLICATIONS

Supermarkets, car parks, laboratories, warehouses.



PRO	220-240 Vac	Ra >80		50000 h L70B20	IP65	IK08	-25°C +35°C	Risk Group 1	 120°	
------------	-------------	--------	-------------------------------------------------------------------------------------	----------------	------	------	----------------	--------------	--------------------------------------------------------------------------------------------	---------------------------------------------------------------------------------------

W	lm	K		PF	L	L1	H		ART.
18	2025	3000	120°	0,90	600	63	63	1 / 10	BT105W
18	2250	4000	120°	0,90	600	63	63	1 / 10	BT105N
18	2250	6000	120°	0,90	600	63	63	1 / 10	BT105C
34	4050	3000	120°	0,90	1200	63	63	1 / 10	BT103W
34	4300	4000	120°	0,90	1200	63	63	1 / 10	BT103N
34	4450	6000	120°	0,90	1200	63	63	1 / 10	BT103C
50	6050	3000	120°	0,90	1500	63	63	1 / 10	BT104W
50	6300	4000	120°	0,90	1500	63	63	1 / 10	BT104N
50	6450	6000	120°	0,90	1500	63	63	1 / 10	BT104C

ADJUSTABLE SUSPENSION WIRES KIT




Suspension cables kit			
	1000	1 / 1	KT-BT1-FS

Batten
MINI BATTEN

**FLICKER
FREE** 

Providing greater visual comfort,
improved definition of detail and
reduction of stress.

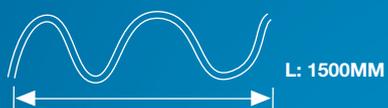

REAL LUMENS

Luminous Flux Data is REAL. Values are measured on actual use conditions.
Nominal values of the LED source are not stated.

Batten

MINI BATTEN

TPOLOGY

Luminaire with dimensions quite similar to a T8 tube with the advantage of direct mains connection and IP65 protection.

FEATURES

Ease of use in various applications, even in wet and dusty environments thanks to IP65: easily removable and repositionable. Great energy saving. Immediate switch on, no flickering or buzzes.

INSTALLATION


It attaches to the clips with which the product is supplied.

MATERIAL

Flame retardant PC.

APPLICATIONS

Workshops, production areas, garages, service corridors, commercial installations.



BASIC	220-240 Vac	Ra 80		30000 h L70B50	IP65	-25°C +35°C	Risk Group 0		 160°	
--------------	-------------	-------	------------------------------------------------------------------------------------	----------------	------	----------------	--------------	------------------------------------------------------------------------------------	----------------------------------------------------------------------------------------------	--------------------------------------------------------------------------------------

W	lm	K		PF		H		ART.
20	2200	4000	160°	0.9	29	1200	10 / 10	BM120NW
20	2250	6000	160°	0.9	29	1200	10 / 10	BM120CW

Batten

FILINO T5 - REGLETTE

**FLICKER
FREE** 

Providing greater visual comfort,
improved definition of detail and
reduction of stress.

APPLICATIONS
SHELVING LIGHTS FOR STORES, AND UNDER
AND OVER CABINETS ETC.



30 cm 3000K - 4000K - 6000K



60 cm 3000K - 4000K - 6000K



90 cm 3000K - 4000K - 6000K



120 cm 3000K - 4000K - 6000K



150 cm 3000K - 4000K - 6000K



ANGULAR CONNECTIONS



INSTALLATIONS IN
CONTINUOUS LINES



LIGHT CONTINUITY WITHOUT
INTERRUPTIONS



Download photometries
www.duralamp.com

REAL LUMENS

Luminous Flux Data is REAL. Values are measured on actual use conditions.
Nominal values of the LED source are not stated.

Batten

FILINO T5 - REGLETTE

TPOLOGY

LED T5 replacement professional undercabinet/ceiling batten light in the most diffused sizes.

FEATURES

It attaches to both walls and ceilings using the clip included. Filino T5 batten can be installed in series code KTLRT, up to a maximum of 10 units (20 W / 23 W); 15 units (8 W / 14 W); 20 units 4 W.

Exceptional light quality & easy fixing with the clips provided; On/off switch on the batten body.

Free-wire connection: use the accessory cable code KTLRT-CORT if a plug is required.


Filino T5 batten can be installed in series by joining together the units or using the accessory connection cable, code KTLRT.

MATERIAL

Heat resistant, anti-yellowing plastic body.

APPLICATIONS

Shelves lighting for retail sector, over- and under-shelves, etc.



BASIC	220-240 Vac	Ra >80		20000 h L70B30	IP20	-25°C +35°C	Risk Group 0		270°	
--------------	-------------	--------	-------------------------------------------------------------------------------------	----------------	------	----------------	--------------	-------------------------------------------------------------------------------------	------	---------------------------------------------------------------------------------------

W	lm	CD	K		L	L1	H		ART.
4	300	175	3000	270°	300	24	39	1 / 10	LRT530WW
4	350	175	4000	270°	300	24	39	1 / 10	LRT530NW
4	400	175	600	270°	300	24	39	1 / 10	LRT530CW
10	850	157	3000	270°	600	24	39	1 / 10	LRT560WW
→ 8	850	400	4000	270°	600	24	39	1 / 10	LRT560NW
→ 8	900	400	6000	270°	600	24	39	1 / 10	LRT560CW
14	1400	600	3000	270°	900	24	39	1 / 10	LRT590WW
14	1450	600	4000	270°	900	24	39	1 / 10	LRT590NW
14	1500	600	6000	270°	900	24	39	1 / 10	LRT590CW
→ 18	1900	850	3000	270°	1200	24	39	1 / 10	LRT5120WW
→ 18	1950	850	4000	270°	1200	24	39	1 / 10	LRT5120NW
→ 18	2000	850	6000	270°	1200	24	39	1 / 10	LRT5120CW
→ 23	2400	1050	3000	270°	1500	24	39	1 / 10	LRT5150WW
→ 23	2450	1050	4000	270°	1500	24	39	1 / 10	LRT5150NW
→ 23	2500	1050	6000	270°	1500	24	39	1 / 10	LRT5150CW

CONNECTION WIRE



	L		ART.
Filino T5. Connection wire	156	1 / 1	KTLRT
Connection wire 15,6 cm.			

Accessories

FILINO T5 - REGLETTE

ELECTRICAL CONNECTION CORD



Electrical connection cord

2000

1 / 10

KTLRT-CORD

Electrical connection cord for Reglette Filino T5 with jack on one side and plug on the other side.



ENDLESS USES FOR FILINO

Available from 30 cm to 150 cm, in different light colours...
Easy to install, reliable and durable!

see more projects





Index



BM120CW	15	S1T0150L1W	9
BM120NW	15	S1T0150L2C	9
BT103C	13	S1T0150L2N	9
BT103N	13	S1T0150L2W	9
BT103W	13	S1T060L1C	9
BT104C	13	S1T060L1N	9
BT104N	13	S1T060L1W	9
BT104W	13	S1T060L2	11
BT105C	13	S1T060L2C	9
BT105N	13	S1T060L2N	9
BT105W	13	S1T060L2W	9
KT-BT1-FS	13	S1T120L2	11
KTLRT	17	S1T150L2	11
KTLRT-CORD	18	S2T0120L1C	7
LRT5120CW	17	S2T0120L1N	7
LRT5120NW	17	S2T0120L1W	7
LRT5120WW	17	S2T0120L2C	7
LRT5150CW	17	S2T0120L2N	7
LRT5150NW	17	S2T0120L2W	7
LRT5150WW	17	S2T0150L1C	7
LRT530CW	17	S2T0150L1N	7
LRT530NW	17	S2T0150L1W	7
LRT530WW	17	S2T0150L2C	7
LRT560CW	17	S2T0150L2N	7
LRT560NW	17	S2T0150L2W	7
LRT560WW	17	S2T060L1C	7
LRT590CW	17	S2T060L1N	7
LRT590NW	17	S2T060L1W	7
LRT590WW	17	S2T060L2	11
S1T0120L1C	9	S2T060L2C	7
S1T0120L1N	9	S2T060L2N	7
S1T0120L1W	9	S2T060L2W	7
S1T0120L2C	9	S2T120L2	11
S1T0120L2N	9	S2T150L2	11
S1T0120L2W	9	SM060CCT	5
S1T0150L1C	9	SM120CCT	5
S1T0150L1N	9	SM150CCT	5



1. Applicability

1.1 These general conditions (hereafter the "Conditions") constitute an integral and essential part of the contract of sale between the Parties. The Conditions shall regulate all legal relationships between Dura Lamp Srl (hereafter "Dura Lamp") and the purchaser (hereafter the "Purchaser") where the said relationships are not disciplined by the applicable terms of the Italian Civil Code (C.C.). The nullity of any of the terms of these Conditions shall not prejudice the validity of the remaining Conditions or the Contract.

1.2 Any changes to these Conditions shall be agreed between the Parties in writing, with the exception of the provisions set down in article 1341 of the Italian C.C..

2. Sales

2.1 Sale requests for the products (hereafter the "Products") shall be accepted 'subject to the seller's approval' and shall be considered to be irrevocable in accordance with and as an effect of article 1329 of the C.C. for a period of 1 (one) month from the date of the order requesting execution without prior acknowledgement, pursuant to and as an effect of article 1327 of the C.C. from the date on which the order is received by Dura Lamp.

2.2 The Products detailed in the individual orders and the relevant accessories shall be supplied to the Purchaser by Dura Lamp with "Retention of Title" pursuant to and as an effect of articles 1523-1526 of the Italian C.C. In this case, the transfer of ownership of the Products to the Purchaser shall take place exclusively upon the full payment of the price agreed, whilst any risks shall be the responsibility of the Purchaser from the moment of delivery of the Products.

2.3 Whilst confirming the terms stated above, the Parties hereby agree that should the Products and relevant accessories be destroyed for causes not attributable to Dura Lamp, the Purchaser shall not be released from the obligation to pay for the same, even where the Products have not yet been delivered.

3. Prices

3.1 The prices detailed on the price list shall be applied to Product sales orders. The aforementioned prices shall be unit prices per single item, except where stated otherwise for certain Products. The Parties shall have the right to agree, in writing, any derogations and/or special conditions of sale.

3.2 Moreover, the Parties hereby agree that the following conditions shall be applied:

- (I) Minimum order: € 300 (three hundred) for Italy - € 750 (seven hundred and fifty) for other countries;
- (II) Delivery free to destination in Italy for orders of € 300 (three hundred) for Italy or more;
- (III) Ex-Works deliveries for other countries.

3.3 The prices given above do not include VAT and installation costs.

3.4 The prices provided in this catalogue shall be valid until a new price list is published.

4. Currency

All prices are given in Euros (exclusive of VAT). Invoices shall be drawn up in Euros.

5. Special requests

Products can be supplied to the Purchaser in non-standard colours and with special features. The relevant price, minimum quantities per order, methods and timing of deliveries shall be agreed in each individual case, in relation to the reference order.

6. Transport

6.1 Dura Lamp shall not be liable for any damage and/or losses which may occur during the transportation of the Products, unless the Products are delivered free at destination.

6.2 Dura Lamp shall have the right to establish the method of transportation to be used for the Products, unless the Parties have previously established a method of transport in writing.

6.3 Upon delivery, the Purchaser shall undertake to verify the condition of the products and shall make any complaints directly to the carrier and/or conduct any actions necessary in the event of loss, misplacement, removal or damage, or delays in transportation and/or the methods of delivery of the Products.

7. Complaints

7.1 In the event that the Products are found to have any faults and/or defects, the Purchaser shall undertake to notify Dura Lamp of the same in writing, by means of a registered letter, no later than 8 (eight) days following the discovery of the said faults and/or defects, at the risk of invalidating the obligations of the guarantee provided by Dura Lamp. In this case, the faulty Products, which should be reported within the terms established, should be returned to Dura Lamp, once the Purchaser has received specific permission to do so in writing.

7.2 In the event that the Purchaser's complaints are held to be valid, Dura Lamp, at its complete discretion, may make the necessary repairs and/or replace the Products, excluding the attribution of any further charges, obligations, indemnification or compensation to the same. The Products in question should be returned to the Dura Lamp Srl plant in Via Pratese 164, 50145, Firenze, Italy. In the event that, following an inspection by Dura Lamp, the Products returned by the Purchaser are not found to be faulty and/or defective, Dura Lamp shall return the Products to the Purchaser, charging the same an amount equal to 15% (fifteen percent) of the value of the said Products.

8. Delivery

8.1 The Parties hereby agree that the terms established for the delivery of the Products shall not be considered absolute or essential and that, in any case, each item shall be exclusively in favor of Dura Lamp, unless otherwise agreed in writing between the Parties.

8.2 In the event of delayed delivery, once 15 (fifteen) days have passed since the agreed date, the Purchaser may send Dura Lamp written warning to complete the delivery within a further term of no more than 15 (fifteen) days from receipt of the same. In the event that Dura Lamp has not completed the delivery within this further term the Purchaser may withdraw from the order with regard to the Products that have not yet been delivered. In this case the Purchaser shall only be obliged to pay Dura Lamp for the Products actually delivered, excluding the payment of any further indemnification and/or compensation to the Purchaser.

8.3 Dura Lamp shall not be responsible for any other breaches, including the failure to deliver or delayed delivery of the Products, caused by events outside its reasonable control such as, purely by way of an example and not limited to the same: the failure to deliver or delayed delivery of manufacturing materials by Dura Lamp's suppliers, equipment breakdowns, strikes and other trade union action, electricity blackouts, suspension of or difficulties with transportation.

9. Payment

9.1 The price due shall be paid by the Purchaser according to the conditions and modalities set down in the order and, in any case, by means of payments made exclusively to "DURA LAMP Srl".

9.2 Dura Lamp shall only recognize the validity of the payments when the same are made in compliance with the provisions of article 9.1 above. This means that amounts paid using any other method shall not be considered to be a payment in discharge of the Purchaser's obligations. The eventual acceptance by Dura Lamp of a bank draft or other trade bill shall only occur with the application of the proviso "under usual reserve".

9.3 In the event of delayed payment with respect to the terms agreed, the Parties hereby agree that bank interest shall be due to Dura Lamp at the current PRIME RATE increased by 3 points. interest shall be applied as of right, with no obligation for Dura Lamp to send the Purchaser a formal notice to pay.

9.4 Moreover, in the event of a delay in payment of more than 15 (fifteen) days, Dura Lamp shall have the right to terminate the order as of right pursuant to article 1456 C.C., sending written notification of the same, barring compensation for any damage.

9.5 In the event that the Parties have agreed upon a method of payment by instalments for the Products, the failure to pay several instalments or just one instalment exceeding one eighth of the overall price of the Products, shall result in the loss of the Purchaser's right to pay in instalments and shall give Dura Lamp the right to request the remaining balance of the price or, alternatively, at its own discretion, to terminate the contract with immediate return of the Products and the acquisition of the instalments paid, as indemnification, barring the right to compensation for any damage sustained.

10. Guarantee

10.1 The Products provided by Dura Lamp shall be guaranteed for a period of 12 (twelve) months from the date of delivery against any manufacturing or material defects and/or faults and against any breakdowns not attributable to the Purchaser. Dura Lamp's only obligation and the Purchaser's right with regard to claims related to the guarantee shall be limited, as decided by Dura Lamp, to the replacement or repair of the defective or non-compliant product or the reimbursement of the price for the purchase of another product. Dura Lamp shall be granted a reasonable amount of time to repair or replace the product, or to make the previously authorized reimbursement. Any defective or non-compliant Products shall become the property of Dura Lamp as soon as they have been replaced or reimbursed.

10.2 The guarantee shall exclude any failures due to circumstances beyond the control of Dura Lamp (lightning, flooding, etc.), as well as any damage caused by the improper use of the Products and/or relevant accessories. Notwithstanding the above, Dura Lamp shall not be bound by the guarantee if the contested defects or non-compliances have occurred as a result of submitting the Products to resistance or environmental tests, the incorrect use of the same, or in the event that the use of or conditions of use of the Products is different from that indicated in the instructions and technical information, as a result of negligence, incorrect installation or accident, or if they derive from improper repairs, alterations, modifications, storage or transportation or by incorrect handling.

10.3 The Purchaser shall send the Products returned in accordance with the terms of the guarantee to the place indicated by Dura Lamp in compliance with the Dura Lamp policy regarding authorization to return materials in force at the time. In the event that the Products returned are found to be compliant or not faulty, the Purchaser shall pay the cost of returning the same as well as the cost of insuring, inspecting and handling the Products.

10.4 LED products Enjoy specific guarantees: details are published on www.duralamp.com

11. Limitation of Liability

11.1 With the sole exclusion of criminal intent and gross negligence, Dura Lamp shall not be liable for loss of profits or savings, loss of reputation or goodwill, any direct, indirect, consequential or special damage that may derive from or be connected to the contract or sale of products or services by Dura Lamp or by the use of the same of a contractual or extra-contractual nature or deriving from any other source, even where Dura Lamp has been notified of or is aware of the possibility of such damage.

11.2 The limitations and exclusions stated in article 11 shall apply within the limits permitted by law.

12. Applicable law and place of jurisdiction

12.1 These Conditions and all the effects of the same shall be governed by Italian law. The Parties hereby agree that any disputes related to these Conditions shall refer to Italian jurisdiction to the exclusion of all others.

12.2 The exclusive place of jurisdiction shall be the registered offices of Dura Lamp Srl, with the express exclusion of any other competing places of jurisdiction.



DURA LAMP S.r.l.
Registered office Via Pratese, 164 – 50145 Firenze
Tel. 055 894 881
e-mail: duralamp@duralamp.it

Registered with the Florence Company Register -
C.F. and VAT number 03312240488
Registered with R.E.A. of Florence at n. 353287 Share capital € 400,000.00 i.v.
Subject to the management and coordination of 3F FILIPPI Srl



A complete list of the Dura Lamp distribution
and project network is available at:

www.duralamp.com

DURALAMP | UNICO Catalogue 24/25

© Copyright 2024 - Dura Lamp S.r.l.

All data and pictured provided in this catalogue are for reference only: since they might change during mass production, they have to be considered nominal values with tolerances. Dura Lamp reserves the right to modify its products in any moment, for technical or commercial reasons.

Photos: Ivan Rossi - Studio Artale - Studio Ceccanti - Alessandro Maurelli - Luca Visentini

Graphic project: Lorenzetti Communication and FD Graphic Studio

Indoor or outdoor setting photos are used to illustrate the possible applications of the product.



duralamp.com