



HYPERCOLOR G8,5 - CERAMIC BURNER

Typology

Discharge lamps.

Features

Product reliability. This is what the entire range of Duralamp discharge lamps has in common.

Used in technical and professional installations where relamping is often difficult, discharge lamps must be lamps you can depend upon.

Notes

The HYPERCOLOR range with ceramic burners: excellent control of colour uniformity, colour rendering and colour stability over time.

90 Vac

Ra >80



12000 h

IP20

G8,5

-15°C
+35°C

Characteristic data

Power	20 W	Dimmable	No	Input	90 Vac	Base	G8,5
IP	20	Flux	1650 lm	Tc	3000 K	Ra	>80

Dimensional characteristics

Ø	14.5 mm
H	85 mm


Lighting and photometric features

Flux	1650 lm
CCT nominal colour temperature	3000 K
Colour of the light	Warm light
Colour rendering index	>80
Lifespan	12000 h
Mercury	2,4 mg

Electrical characteristics

Rated power	20 W
Input voltage	90 Vac
Frequency	50 Hz
Dimmable	No
Input current	0.23 A
Operating temperature	-15°C / +35°C
Operating position	360°

Spectrometry

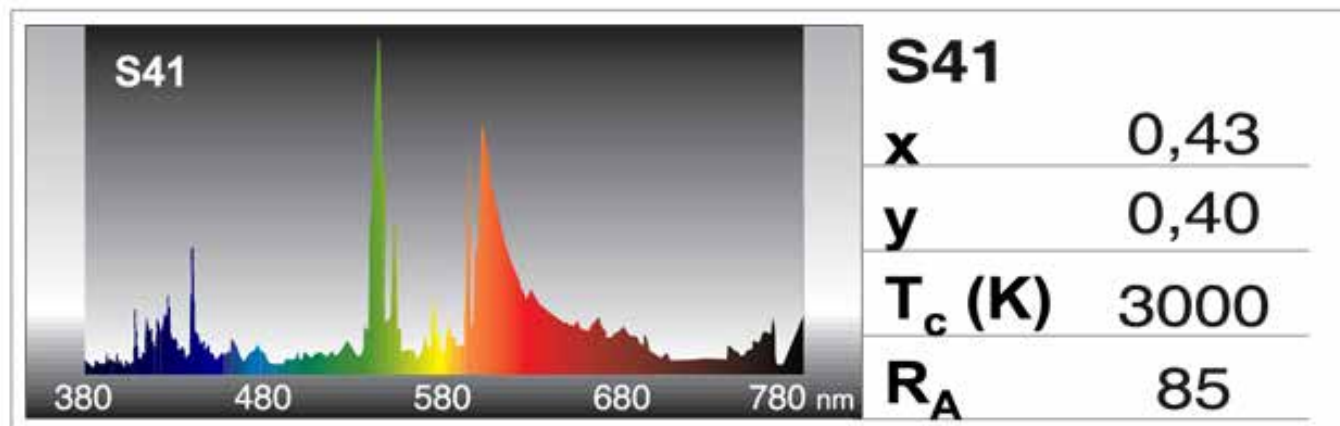

European Directives

2009/125/EC * Ecodesign
 2011/65/EU * RoHS
 2012/19/EU * RAEE
 2014/30/EU * EMC
 2014/35/EU * LVD
 2015/863 * Amending RoHS
 2017/1369 * Regulation for Energy Labelling
 2019/2015 * Regulation for Energy Labelling
 2019/2020 * Regulation for Ecodesign
 2021/340 * Amending Reg. Energy Labelling
 2021/341 * Amending Reg. Ecodesign

Product standards

CEI EN 55015:2020 (+A11:2020)
 CEI EN 62035:2016 (+A1:2020)

Logistics data

Item net weight	14 gr
Barcode single item	8011905826567
Number of pieces multiple pack	12
Barcode multiple pack	8011905771843