


## DALI 2 - 1-10 V - PUSH DALI DRIVER

### Features

Can be used with fittings with replaceable remote driver.  
220÷240 V 50/60 Hz  
Lifetime 50000 h.

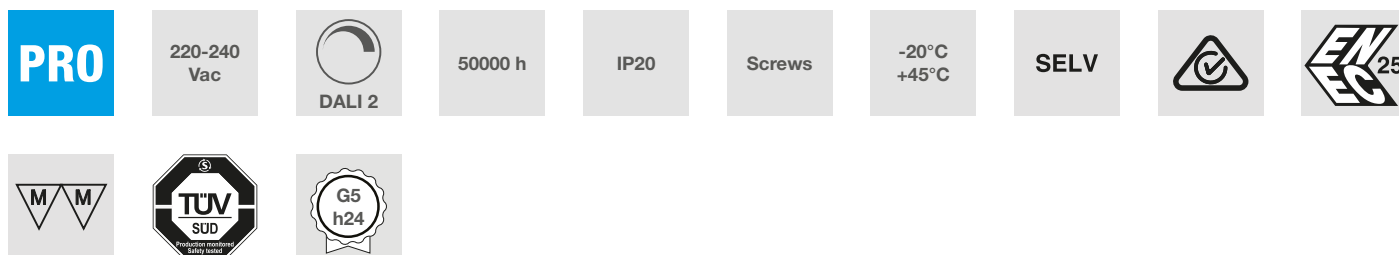

### Characteristic data

Power	60 W	Dimmable	DALI 2	Input	220-240 Vac	Base	Screws
IP	20	PF	0,95	LED Warranty	G5h24		

### Dimensional characteristics

L	129 mm
L1	76 mm
H	30 mm

### Lighting and photometric features

Lifespan	50000 h
----------	---------

### Electrical characteristics

Rated power	60 W
Input voltage	220-240 Vac
Output voltage	3-42 Vdc
Dimmable	DALI 2
Power factor (PF)	0,95
Input current	0.4 A
Operating temperature	-20°C / +45°C

## Other Infotech

Max Case Temperature	80
----------------------	----

## LED Warranty

G5h24	Full Guarantee 5 years (24h/24h) Without limitations on the duration of use for the first year, provided the observance of the installation conditions.
-------	---

## European Directives

2009/125/EC \* Ecodesign  
2011/65/EU \* RoHS  
2012/19/EU \* RAEE  
2014/30/EU \* EMC  
2014/35/EU \* LVD  
2015/863 \* Amending RoHS  
2017/1369 \* Regulation for Energy Labelling  
2019/2015 \* Regulation for Energy Labelling  
2019/2020 \* Regulation for Ecodesign  
2021/340 \* Amending Reg. Energy Labelling  
2021/341 \* Amending Reg. Ecodesign

## Product standards

CEI EN 55015:2020 (+A11:2020)  
CEI EN 61000-3-2:2019 (+A1:2021)  
CEI EN 61000-3-3:2014 (+EC1:2014/+EC2:2016/+A1:2021/+A2:2022)  
CEI EN 61347-1:2016 (+A1:2021)  
CEI EN 61347-2-13:2015 (+A1:2018)  
CEI EN 61547:2010

## Logistics data

Item net weight	240 gr
Barcode single item	8011905935474
Minimum order quantity	1
Minimum packaging	1 / 1