

SEGNASENTIERO IP65 UP&DOWN

Typology

Wall mounted surface pathway markers.

Features

Three light shielding versions for different lighting effects: full light, downwards and up&down.

Installation

Surface with the bracket supplied.

Material

Heat-resistant plastic body; opal polycarbonate screen.

Applications

Pathway marker.

BASIC

220-240
Vac

Ra >80



25000 h
L70B30

IP65

Wire

-25°C
+35°C


Risk
Group 0



Characteristic data

Power	4 W	Beam	120°	Dimmable	No	Input	220-240 Vac
Base	Wire	IP	65	Flux	100 lm	PF	0,51
Tc	4000 K	Ra	>80	LED Warranty	G2	RG	RG0
Color	Black						

Dimensional characteristics



L	140 mm
L1	140 mm
H	51 mm


Lighting and photometric features

Beam opening	120°
Flux	100 lm
CCT nominal colour temperature	4000 K
Colour of the light	Natural light
Colour rendering index	>80
Lifespan	25000 h
LED lifespan	L70B30
Trigger time	<0,2 s
Heating time up to 60% of full efficiency	Instant Full Light

Electrical characteristics

Rated power	4 W
Input voltage	220-240 Vac
Frequency	50/60 Hz
Dimmable	No
Power factor (PF)	0,51
Input current	0.04 A
Weighted energy consumption	4 kWh/1000h
Number of cycles	100000
Operating temperature	-25°C / +35°C

Photometry

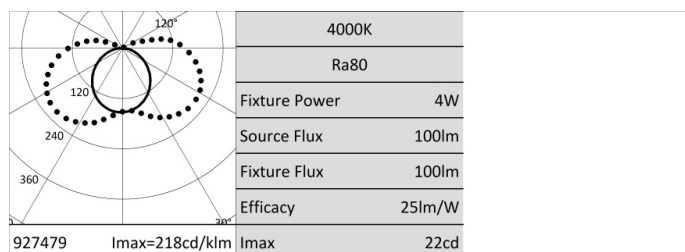

EulumDat file on the site

Other Infotech

Reflector	Yes
-----------	-----

LED Warranty

G2	Up to 2 years (4000h/year) *4000h = 11h a day x 365 days. Without limitations on the duration of use for the first year, provided the observance of the installation conditions.
----	--

European Directives

2009/125/EC * Ecodesign
2011/65/EU * RoHS
2012/19/EU * RAEE
2014/30/EU * EMC
2014/35/EU * LVD
2015/863 * Amending RoHS
2017/1369 * Regulation for Energy Labelling
2019/2015 * Regulation for Energy Labelling
2019/2020 * Regulation for Ecodesign
2021/340 * Amending Reg. Energy Labelling
2021/341 * Amending Reg. Ecodesign

Product standards

CEI EN 55015:2020 (+A11:2020)
CEI EN 60598-1:2022
CEI EN 60598-2-1:2022
CEI EN 61000-3-2:2019 (+A1:2021)
CEI EN 61000-3-3:2014 (+EC1:2014/+EC2:2016/+A1:2021/+A2:2022)
CEI EN 61547:2010
CEI EN 62031:2021 (+A11:2022)
CEI EN 62471:2010
IEC/TR 62471-2:2009
CEI EN 62493:2015
CEI 34-141:2014

Logistics data

Item net weight	171 gr
Barcode single item	8011905927479
Number of pieces multiple pack	50
Barcode multiple pack	8011905932534
Minimum order quantity	1
Minimum packaging	1 / 50

All parts of this document are Duralamp ownership. All rights reserved. This document and the included information are provided without any responsibility deriving from mistakes or omissions. No part of this document can be cut, reproduced or used without written authorization. Duralamp maintains the right to change the included data without notice due to improvements of the products