

DURASTRIP PRO EVO IP20

The PRO EVO line is characterized by the narrow pitch of the LEDs even on the smaller power 5W/m: a quality product with 140lm/W efficiency. Excellent colour rendering, Ra92, and a choice of 4 different wattages, from 5W to 24W per metre. It can be used in any project and provides excellent energy savings in residential or commercial contexts.

Features

White shades: 3000K and 4000K available, other colour temperatures on request and with MOQ.

Installation

Complete with 3M double-sided tape to attach to the surface and jumpers to be screwed to the surface. When using double-sided tape degrease the application surface adequately.

Usage information

Dimmable 0-100% Flicker Free
DALI - DMX - 1-10
Analogue and digital domotic control systems
Push Dali with ZKCDAFF controllers
CASAMBI compatible

Packaging

Packaged in 5 meters reels.

Connections


IP20: terminals with free wires.
For longer connections, connect in series or parallel, see diagram.
Strips can be cut to size by following the cutting indications printed on the strips.




Characteristic data

Power	50 W	Beam	120°	Dimmable	Yes	Input	24 Vdc
Base	Free Wire	IP	20	Tc	6000 K	Ra	92
LED Warranty	G5h24	RG	RG0				

Dimensional characteristics

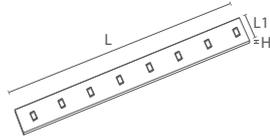

8 LED (5W / 10W / 15W)

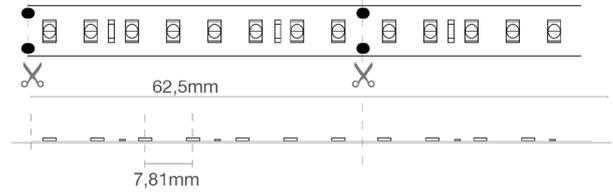

L	5000 mm
L1	10 mm
H	1 mm

Cutting pitch	62.5 mm
LED pitch	7.8 mm

Lighting and photometric features

Beam opening	120°
Nominal flux per mt	1400 lm/m
CCT nominal colour temperature	6000 K
Colour of the light	Cool light
Colour rendering index	92
Lifespan	50000 h
LED lifespan	L70B20
Trigger time	<0,2 s
Heating time up to 60% of full efficiency	Instant Full Light

Electrical characteristics

Rated power	50 W
Input voltage	24 Vdc
Dimmable	Yes
Operating temperature	-25°C / +35°C

Photometry

	6000K	H(m)	D(m)	E _{max} (lx)	
	Ra92		117°		
Fixture Power	10W	1	3.25	442	
Source Flux	1400lm	2	6.50	110	
Fixture Flux	1400lm	3	9.74	49	
Efficacy	140lm/W	4	12.99	28	
014674 I _{max} =316cd/klm	I _{max}	442cd	5	16.24	18

EuLumDat file on the site

LED Warranty

G5h24	Full Guarantee 5 years (24h/24h) Without limitations on the duration of use for the first year, provided the observance of the installation conditions.
-------	---

European Directives

2009/125/EC * Ecodesign
 2011/65/EU * RoHS
 2012/19/EU * RAEE
 2014/30/EU * EMC
 2015/863 * Amending RoHS
 2017/1369 * Regulation for Energy Labelling
 2019/2015 * Regulation for Energy Labelling
 2019/2020 * Regulation for Ecodesign
 2021/340 * Amending Reg. Energy Labelling
 2021/341 * Amending Reg. Ecodesign

Product standards

CEI EN 55015:2020 (+A11:2020)
 CEI EN 60598-1:2022
 CEI EN 60598-2-1:2022
 CEI EN 61000-3-2:2019 (+A1:2021)
 CEI EN 61000-3-3:2014 (+EC1:2014/+EC2:2016/+A1:2021/+A2:2022)
 CEI EN 61547:2010
 CEI EN 62031:2021 (+A11:2022)
 CEI EN 62471:2010
 IEC/TR 62471-2:2009
 CEI EN 62493:2015
 CEI 34-141:2014

Logistics data

Item net weight	77 gr
Barcode single item	8011905014674
Number of pieces multiple pack	20
Minimum order quantity	20
Minimum packaging	20 / 20